



















40W Constant Voltage + Constant Current LED Driver







### **Features**

- Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer; 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty

# Applications

- LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


#### GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

HLG-40H series is a 40W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-40H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 89.5%, with the fanless design, the entire series is able to operate for -40 ~ +80 case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-40H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## Model Encoding

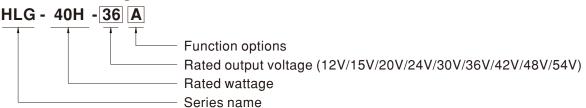

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request

#### **SPECIFICATION**

	HLG-40H-12	HLG-40H-15	HLG-40H-20	HLG-40H-24	HLG-40H-30	HLG-40H-36	HLG-40H-42	HLG-40H-48	HLG-40H-54
DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
RATED CURRENT	3.33A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.75A
RATED POWER	39.96W	40.05W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	40.5W
RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p
VOLTAGE AD L DANGE									
VOLTAGE ADJ. RANGE	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V
OURDENT AR L RANGE	Adjustable for	r A/AB-Type oi	nly (via built-ir	potentiomete	er)				
CURRENT ADJ. RANGE	2 ~ 3.33A	1.6 ~ 2.67A	1.2 ~ 2A	1 ~ 1.67A	0.8 ~ 1.34A	0.67 ~ 1.12A	0.58 ~ 0.96A	0.5 ~ 0.84A	0.45 ~ 0.75
VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
SETUP, RISE TIME Note.6	500ms,80ms/	115VAC 50	Oms,80ms/230	OVAC					
•			,						
, , , ,									
VOLTAGE RANGE Note.5									
FREQUENCY RANGE									
THE GOLHOT HOUSE		VAC PF≥09	5/230VAC PF	≥0 92/277VA0	C. @ full load				
POWER FACTOR (Typ.)	, , , , , , , , , , , , , , , , , , , ,								
	,		,		,	C)			
TOTAL HARMONIC DISTORTION	١	_				0)			
FEFICIENCY (Typ.)	`				· · · · · ·	88 5%	88 5%	80 5%	89.5%
						00.570	00.570	00.070	00.070
						ΣΜΛ <i>4</i> 10			
	COLD STAIRT	30A(twidti1-210)	μο ilicasuleu a	1 JU /0 Ipeak) at 2	200 VAO, PELINE	_IVIA 4 10			
	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 230VAC								
	<0.75mA / 27	7VAC							
OVER CURRENT									
SHORT CIRCUIT									
						41 ~ 49V	48 ~ 58V	54 ~ 65V	59 ~ 68V
OVER VOLTAGE					111				100
OVER TEMPERATURE									
		• • •			TEMPERATU	JRE" section)			
			na						
· · · · · · · · · · · · · · · · · · ·	,								
	,		le period for	72min each ale	ang Y V 7 ayo	6			
TURNING									
SAFETY STANDARDS Note.8									
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC								
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
EMC EMISSION Note.8	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load≥60%); BS EN/EN61000-3-3, GB/T 17743, GB17625.1,								
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020								
MTBF	3395.8K hrs n	nin. Telcordi	a SR-332 (Bel	lcore) ; 345.8K	hrs min. MI	L-HDBK-217F	(25°℃)		
MIIDI							. ,		
DIMENSION	171*61.5*36.8	3mm (L*W*H)							
	CONSTANT CURRENT REGION Note.4 RATED CURRENT RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE  CURRENT ADJ. RANGE  VOLTAGE TOLERANCE Note.3 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.)  VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR (Typ.)  TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT (Typ.) INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT OVER VOLTAGE OVER TEMPERATURE WORKING TEMP. MAX. CASE TEMP. WORKING HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS Note.8 WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION Note.8	DC VOLTAGE  CONSTANT CURRENT REGION Note.4  RATED CURRENT  RATED CURRENT  RATED POWER  RIPPLE & NOISE (max.) Note.2  VOLTAGE ADJ. RANGE  CURRENT (TOLERANCE Note.3)  LINE REGULATION  LOAD REGULATION  SETUP, RISE TIME  NOTE.5  NOTE.5  FREQUENCY RANGE  POWER FACTOR (Typ.)  TOTAL HARMONIC DISTORTION  REFFICIENCY (Typ.)  AC CURRENT (Typ.)  MAX. No. of PSUS on 16A  CIRCUIT BREAKER  LEAKAGE CURRENT  OVER TEMPERATURE  WORKING TEMP.  MAX. CASE TEMP.  WORKING HUMIDITY  STORAGE TEMP., HUMIDITY  TOASE + 80°C  GB19510.1, J61347-1, J6  WITHSTAND VOLTAGE  I/P-O/P.3.75i  SOLATION RESISTANCE  LEMC IMMINITY  COMPILIANCE  COMPILIANCE	DC VOLTAGE	DC VOLTAGE   12V	DC VOLTAGE   12V	DC VOLTAGE   12V	DC VOLTAGE   12V	DC VOLTAGE   12V	DC VOLTAGE   12V


- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- $3. \ \mbox{Tolerance}$  : includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  (as available on https://www.meanwell.com//Upload/PDF/EMI\_statement\_en.pdf)
- 8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.
- 9.This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 75 °C or less.
- 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com.
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
- X Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx File Name:HLG-40H-SPEC 2024-01-08




### **■** BLOCK DIAGRAM

Fosc: 100KHz

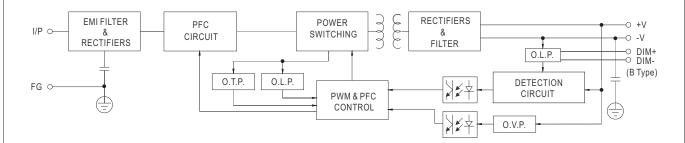

### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

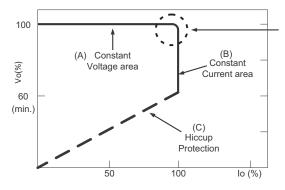


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




### ■ DIMMING OPERATION

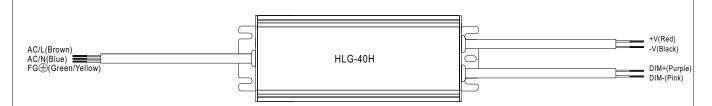


#### imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
  - 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

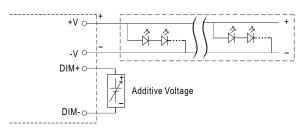


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

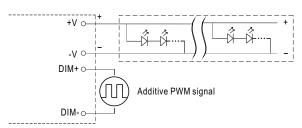



"DO NOT connect "DIM- to -V"


Applying additive resistance:

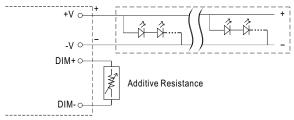

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

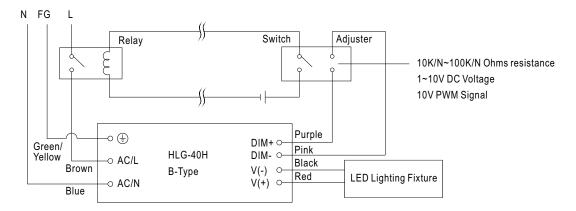


Using a switch and relay can turn ON/OFF the lighting fixture.



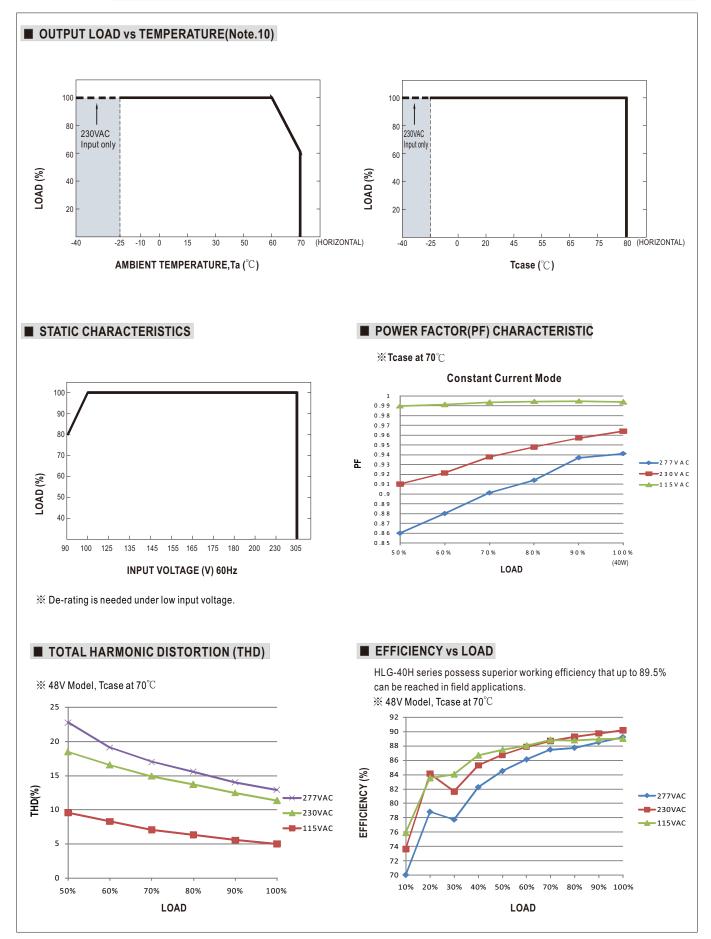





# **■** LIFE TIME

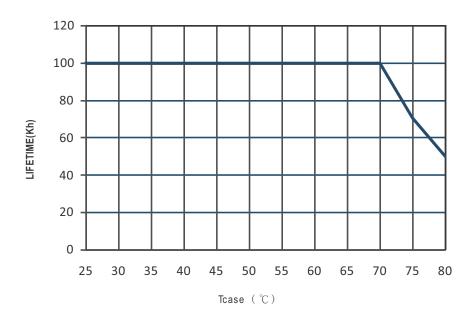



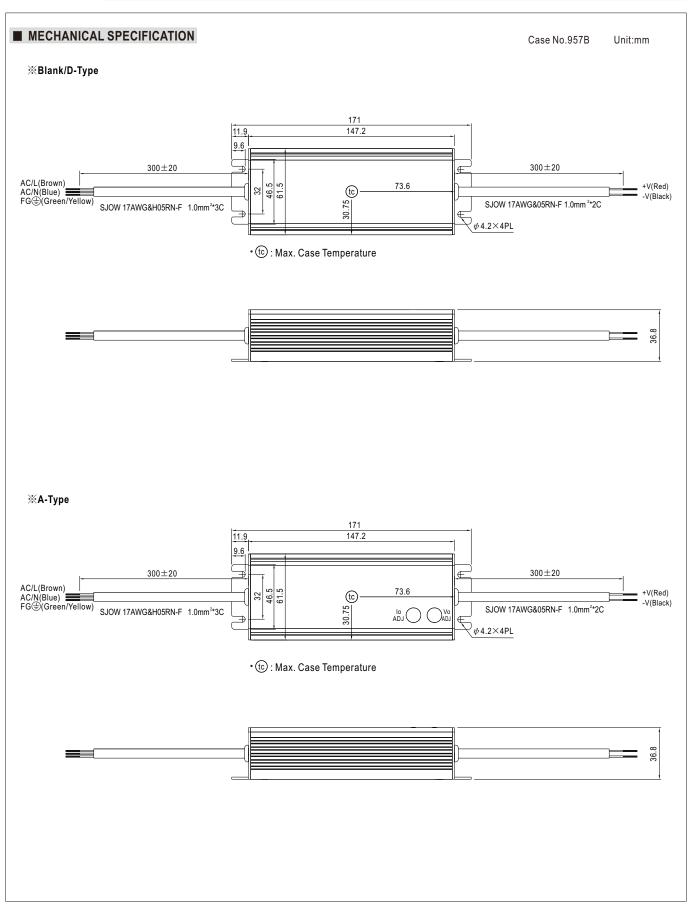



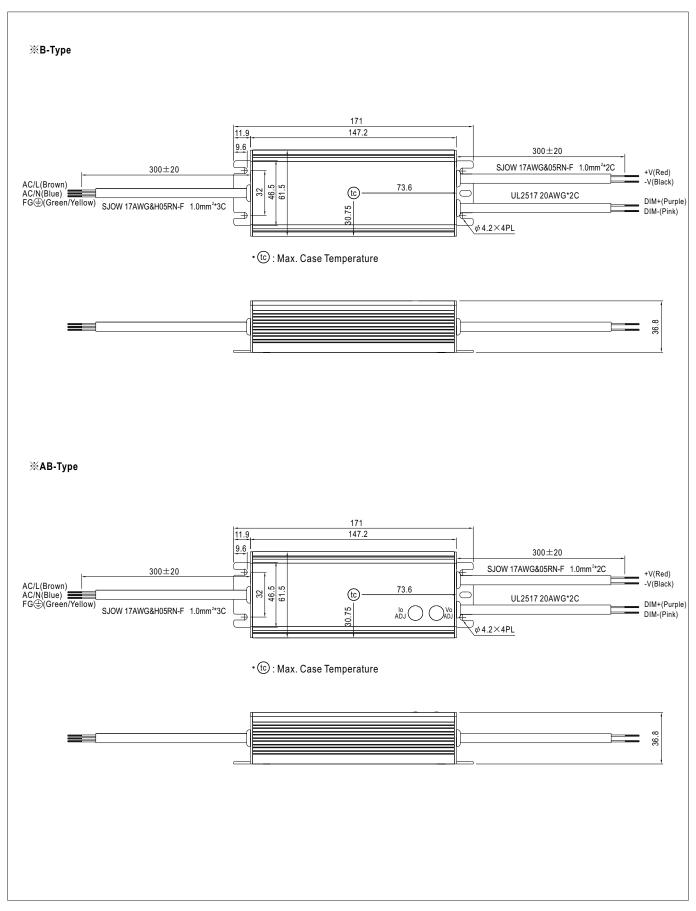




#### **■ WATERPROOF CONNECTION**


### $\frak{\%}$ Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-40H to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)				
M12	000	000			
IVITZ	4-PIN	5-PIN			
	5A/PIN	5A/PIN			
Order No.	M12-04	M12-05			
Suitable Current	10A max.	10A max.			

Size	Pin Configuration (Female)			
M15	(o)			
IVITO	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			



#### ※ Cable Joiner

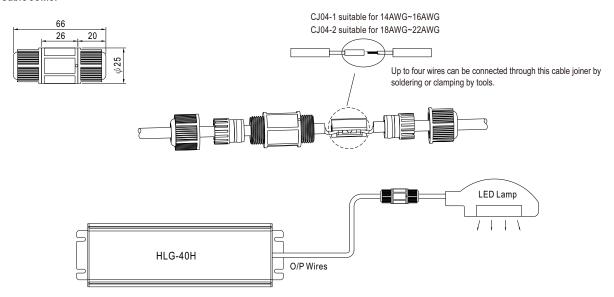

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

### ■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html