

CERAMIC SMD CRYSTAL

ABM3C

RoHS/RoHS II Compliant



5.0 x 3.2 x 1.3mm

ABM3C Series products with the Date Code/Traceability Code marking ending in "X" are Glass-Sealed and the following RoHS Exemption applies:

Pb in Glass, exemption 7C-I per RoHS II Directive 2011/65/EU Annex

ABM3C Series products with the Date Code/Traceability Code marking ending in "C" and "F" are Seam-Sealed and are Pb-Free.

Moisture Sensitivity Level – MSL – N/A (The ABM3C Series is a Hermetically Sealed device and not moisture sensitive)

FEATURES:

- Low height; suitable for thin equipment.
- New seam sealed package available (code "C")
- Tight tolerance and stability available.
- Suitable for RoHS compliant reflow profile


APPLICATIONS:

- High density applications.
- Modems, communication and test equipment.
- PMCIA, Wireless applications

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10.000		50.000	MHz	Fundamental
Operation Mode	Fundamental				
Operating Temperature	-10		+70	°C	See options
Storage Temperature	-40		+90	°C	
Frequency Tolerance @+25°C	-50		+50	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-50		+50	ppm	See options
Equivalent series resistance (R1)			60	Ω	10.000 – 15.999MHz
			50		16.000 – 50.000MHz
Shunt capacitance (C0)			7	pF	
Load capacitance (CL)		18		pF	Standard (See options if other than STD)
Drive Level		10	100	μ W	
Aging	-5		+5	ppm	@25°C±3°C First year
Insulation Resistance	500			M Ω	@ 100Vdc ± 15V

OPTIONS & PART IDENTIFICATION: (Left blank if standard)

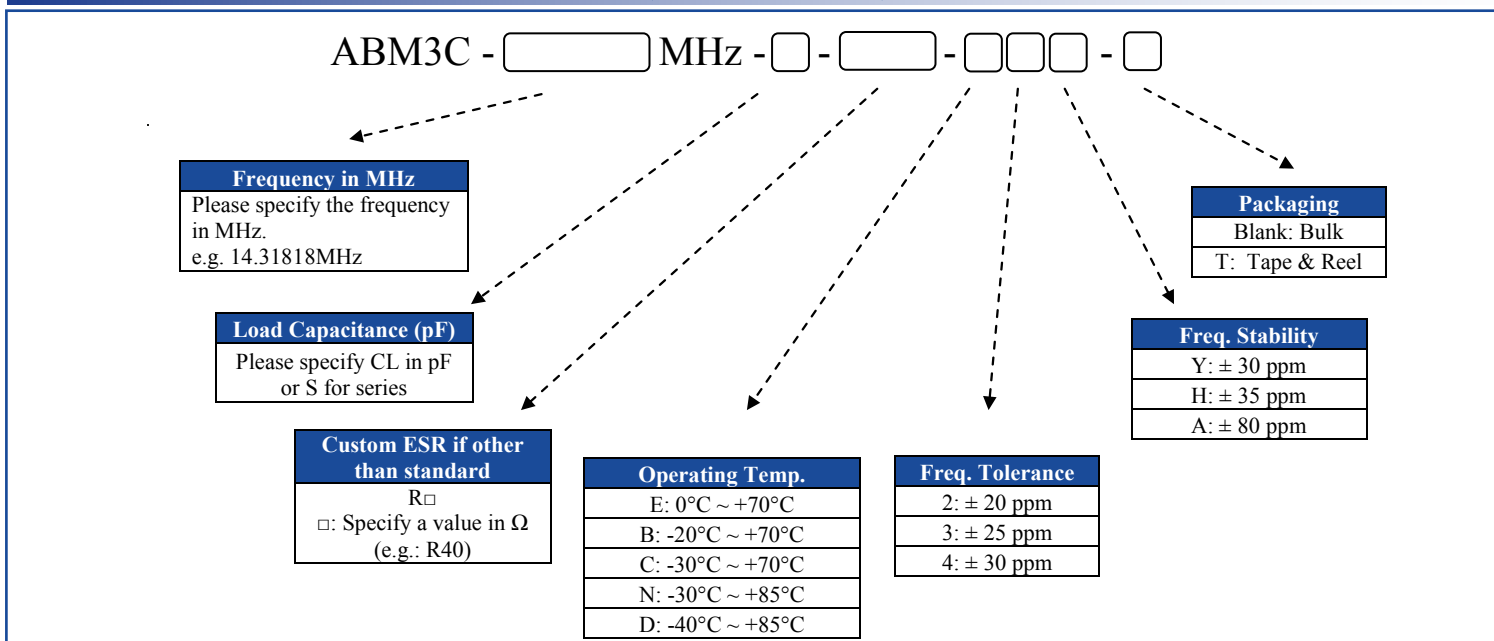


ABM3C

RoHS/RoHS II Compliant



5.0 x 3.2 x 1.3mm

➤ OUTLINE DRAWING:

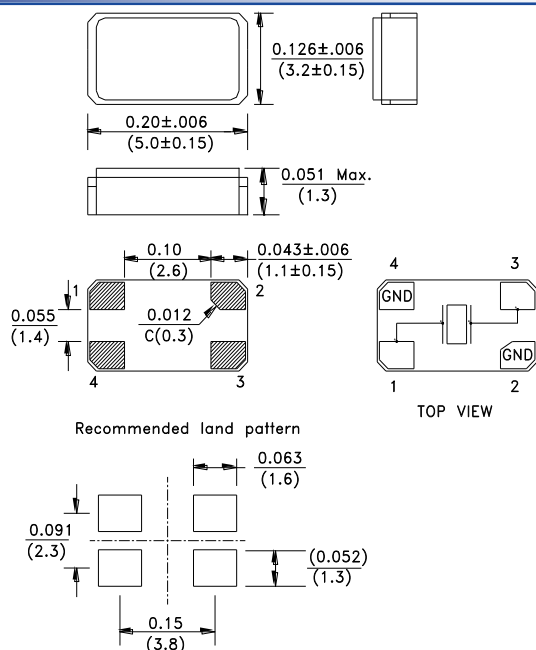


Sealing Method :

Glass Sealing for parts with Traceability Code ending in "X"
Seam Sealing for parts with Traceability Code ending in "C" and "F"


Dimensions: inches (mm)

REFLOW PROFILE:

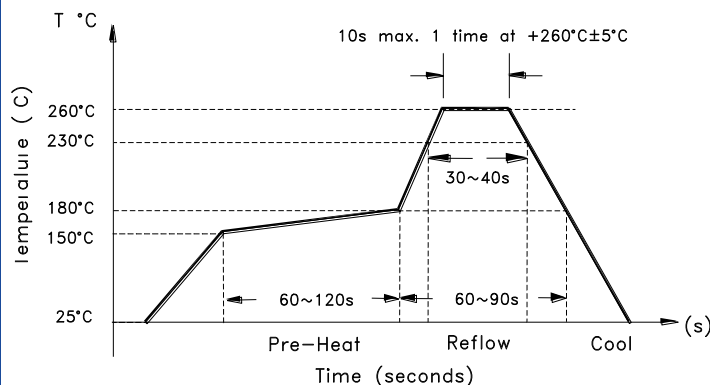

TAPE & REEL:

1000pcs/reel

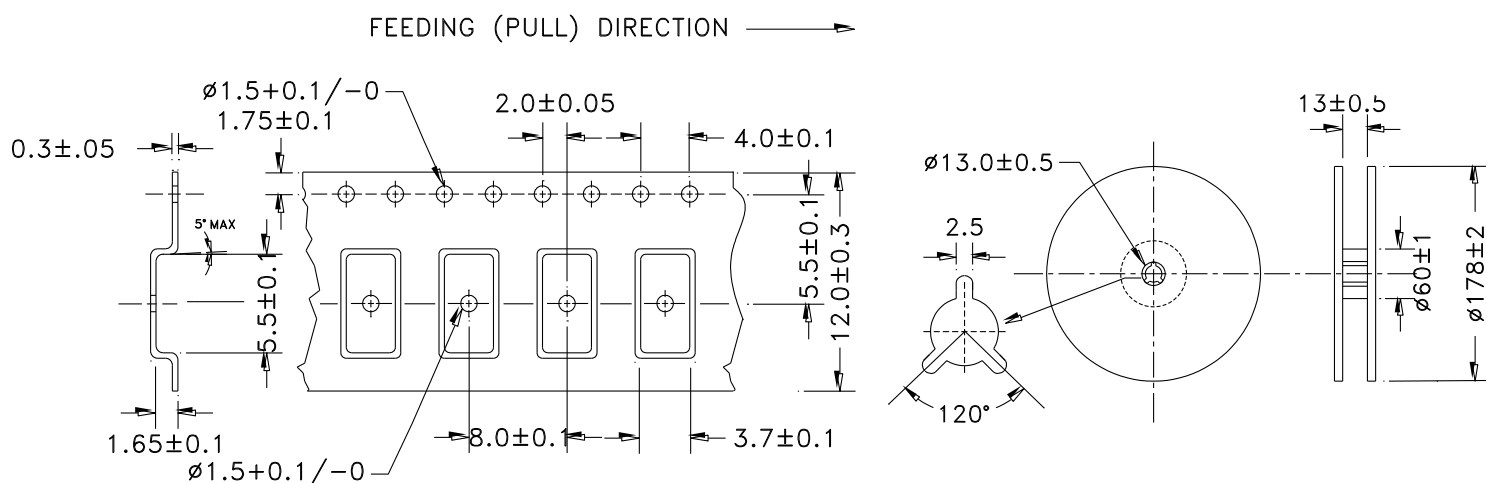

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ABM3C-10.000MHZ-D4Y-T](#) [ABM3C-11.0592MHZ-D4Y-T](#) [ABM3C-12.000MHZ-D4Y-T](#) [ABM3C-12.288MHZ-D4Y-T](#)
[ABM3C-13.000MHZ-D4Y-T](#) [ABM3C-13.560MHZ-D4Y-T](#) [ABM3C-14.31818MHZ-D4Y-T](#) [ABM3C-14.7456MHZ-D4Y-T](#)
[ABM3C-15.000MHZ-D4Y-T](#) [ABM3C-16.000MHZ-D4Y-T](#) [ABM3C-16.384MHZ-D4Y-T](#) [ABM3C-18.432MHZ-D4Y-T](#)
[ABM3C-19.6608MHZ-D4Y-T](#) [ABM3C-20.000MHZ-D4Y-T](#) [ABM3C-22.1184MHZ-D4Y-T](#) [ABM3C-24.000MHZ-D4Y-T](#)
[ABM3C-24.576MHZ-D4Y-T](#) [ABM3C-25.000MHZ-D4Y-T](#) [ABM3C-26.000MHZ-D4Y-T](#) [ABM3C-27.000MHZ-D4Y-T](#)
[ABM3C-29.4912MHZ-D4Y-T](#) [ABM3C-10.000MHZ-J4-T](#) [ABM3C-11.0592MHZ-J4-T](#) [ABM3C-12.000MHZ-J4-T](#) [ABM3C-](#)
[12.288MHZ-J4-T](#) [ABM3C-13.000MHZ-J4-T](#) [ABM3C-13.560MHZ-J4-T](#) [ABM3C-14.31818MHZ-J4-T](#) [ABM3C-](#)
[14.7456MHZ-J4-T](#) [ABM3C-15.000MHZ-J4-T](#) [ABM3C-16.000MHZ-J4-T](#) [ABM3C-16.384MHZ-J4-T](#) [ABM3C-](#)
[18.432MHZ-J4-T](#) [ABM3C-19.6608MHZ-J4-T](#) [ABM3C-20.000MHZ-J4-T](#) [ABM3C-22.1184MHZ-J4-T](#) [ABM3C-](#)
[24.000MHZ-J4-T](#) [ABM3C-24.576MHZ-J4-T](#) [ABM3C-25.000MHZ-J4-T](#) [ABM3C-26.000MHZ-J4-T](#) [ABM3C-27.000MHZ-](#)
[J4-T](#) [ABM3C-29.4912MHZ-J4-T](#) [ABM3C-10.000MHZ-KV-T](#) [ABM3C-11.0592MHZ-KV-T](#) [ABM3C-12.000MHZ-KV-T](#)
[ABM3C-12.288MHZ-KV-T](#) [ABM3C-13.000MHZ-KV-T](#) [ABM3C-13.560MHZ-KV-T](#) [ABM3C-14.31818MHZ-KV-T](#)
[ABM3C-14.7456MHZ-KV-T](#) [ABM3C-15.000MHZ-KV-T](#) [ABM3C-16.000MHZ-KV-T](#) [ABM3C-16.384MHZ-KV-T](#) [ABM3C-](#)
[18.432MHZ-KV-T](#) [ABM3C-19.6608MHZ-KV-T](#) [ABM3C-20.000MHZ-KV-T](#) [ABM3C-22.1184MHZ-KV-T](#) [ABM3C-](#)
[24.000MHZ-KV-T](#) [ABM3C-24.576MHZ-KV-T](#) [ABM3C-25.000MHZ-KV-T](#) [ABM3C-26.000MHZ-KV-T](#) [ABM3C-](#)
[27.000MHZ-KV-T](#) [ABM3C-29.4912MHZ-KV-T](#) [ABM3C-30.000MHZ-D4Y-T](#) [ABM3C-32.000MHZ-D4Y-T](#) [ABM3C-](#)
[33.000MHZ-D4Y-T](#) [ABM3C-36.000MHZ-D4Y-T](#) [ABM3C-40.000MHZ-D4Y-T](#) [ABM3C-48.000MHZ-D4Y-T](#) [ABM3C-](#)
[30.000MHZ-J4-T](#) [ABM3C-32.000MHZ-J4-T](#) [ABM3C-33.000MHZ-J4-T](#) [ABM3C-36.000MHZ-J4-T](#) [ABM3C-40.000MHZ-](#)
[J4-T](#) [ABM3C-48.000MHZ-J4-T](#) [ABM3C-30.000MHZ-KV-T](#) [ABM3C-32.000MHZ-KV-T](#) [ABM3C-33.000MHZ-KV-T](#)
[ABM3C-36.000MHZ-KV-T](#) [ABM3C-40.000MHZ-KV-T](#) [ABM3C-48.000MHZ-KV-T](#) [ABM3C-25.000MHz-B-4-Y-T](#)
[ABM3C-12.000MHz-B-4-Y-T](#) [ABM3C-18.432MHz-B-4-Y-T](#) [ABM3C-30.000MHz-B-4-Y-T](#) [ABM3C-28.63636MHz-B-4-Y-](#)
[T](#) [ABM3C-14.31818MHz-B-4-Y-T](#) [ABM3C-22.1184MHz-B-4-Y-T](#) [ABM3C-20.000MHz-B-4-Y-T](#) [ABM3C-12.288MHz-B-](#)
[4-Y-T](#) [ABM3C-24.576MHz-B-4-Y-T](#) [ABM3C-14.7456MHz-B-4-Y-T](#) [ABM3C-10.000MHz-B-4-Y-T](#) [ABM3C-13.560MHz-](#)
[B-4-Y-T](#) [ABM3C-16.000MHz-B-4-Y-T](#) [ABM3C-24.000MHz-B-4-Y-T](#) [ABM3C-27.120MHz-B-4-Y-T](#) [ABM3C-48.000MHz-](#)
[B-4-Y-T](#) [ABM3C-27.000MHz-B-4-Y-T](#) [ABM3C-25.000MHZ-E4Y-T](#)