# SN54CBT16209, SN74CBT16209A 18-BIT FET BUS-EXCHANGE SWITCHES

SCDS006O - NOVEMBER 1992 - REVISED NOVEMBER 2004

- Members of the Texas Instruments Widebus™ Family
- 5-Ω Switch Connection Between Two Ports
- TTL-Compatible Input Levels

### description/ordering information

The SN54CBT16209 and SN74CBT16209A devices provide 18 bits of high-speed TTL-compatible bus switching or exchanging. The low on-state resistance of the switches allows connections to be made with minimal propagation delay.

The devices operate as an 18-bit bus switch or a 9-bit bus exchanger, which provides data exchanging between the four signal ports via the data-select (S0, S1, S2) terminals.

#### SN54CBT16209 . . . WD PACKAGE SN74CBT16209A . . . DGG, DGV, OR DL PACKAGE (TOP VIEW)

				ı
S0 [	1	$\cup$	48	] S1
1A1 [	2		47	] S2
1A2	3		46	] 1B1
GND [	4		45	] 1B2
2A1	5		44	2B1
2A2	6		43	2B2
V <sub>CC</sub>	7		42	GND
3A1	8		41	] 3B1
3A2	9		40	] 3B2
GND	10		39	GND
4A1	11		38	] 4B1
4A2	12		37	] 4B2
5A1	13		36	] 5B1
5A2	14		35	] 5B2
GND [	15		34	GND
6A1	16		33	] 6B1
6A2	17		32	] 6B2
7A1 [	18		31	] 7B1
7A2 [	19		30	] 7B2
GND [	20		29	GND
8A1	21		28	BB1
8A2	22		27	BB2
9A1	23		26	9B1
9A2	24		25	] 9B2
	_			l

#### **ORDERING INFORMATION**

TA	PACKA	<sub>GE</sub> †	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	0000 01	Tube	SN74CBT16209ADL	ODT40000A
	SSOP – DL	Tape and reel	SN74CBT16209ADLR	CBT16209A
-40°C to 85°C	TSSOP - DGG	Tape and reel	SN74CBT16209ADGGR	CBT16209A
	TVSOP – DGV	Tape and reel	SN74CBT16209ADGVR	CY209A
-55°C to 125°C CFP - WD Tube		Tube	SNJ54CBT16209WD	SNJ54CBT16209WD

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus is a trademark of Texas Instruments.




# SN54CBT16209, SN74CBT16209A 18-BIT FET BUS-EXCHANGE SWITCHES

SCDS006O - NOVEMBER 1992 - REVISED NOVEMBER 2004

### **FUNCTION TABLE**

	INPUTS		INPUTS/0	OUTPUTS	FUNCTION
S2	S1	S0	A1	A2	FUNCTION
L	L	L	Z	Z	Disconnect
L	L	Н	B1	Z	A1 port = B1 port
L	Н	L	B2	Z	A1 port = B2 port
L	Н	Н	Z	B1	A2 port = B1 port
Н	L	L	Z	B2	A2 port = B2 port
Н	L	Н	Z	Z	Disconnect
Н	Н	L	B1	B2	A1 port = B1 port A2 port = B2 port
Н	Н	Н	B2	B1	A1 port = B2 port A2 port = B1 port

# logic diagram (positive logic)

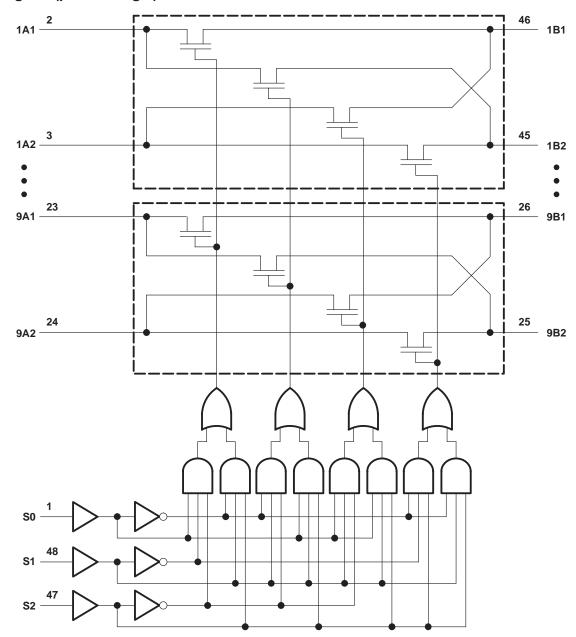

# SN54CBT16209, SN74CBT16209A **18-BIT FET BUS-EXCHANGE SWITCHES**

SCDS006O - NOVEMBER 1992 - REVISED NOVEMBER 2004

# absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage range, V <sub>CC</sub>		0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)		$\dots$ -0.5 V to 7 V
Continuous channel current		128 mA
Input clamp current, $I_{IK}$ ( $V_I < 0$ )		–50 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2)	): DGG package	70°C/W
	DGV package	58°C/W
	DL package	63°C/W
Storage temperature range, T <sub>sto</sub>		-65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### recommended operating conditions (see Note 3)

		SN54CB1	Г16209	SN74CBT		
		MIN	MAX	MIN	MAX	UNIT
VCC	Supply voltage	4	5.5	4	5.5	V
VIH	High-level control input voltage	2		2		V
V <sub>IL</sub>	Low-level control input voltage		0.8		0.8	V
TA	Operating free-air temperature	-55	125	-40	85	°C

NOTE 3: All unused control inputs of the device must be held at VCC or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PAR	RAMETER		TEST CONDITION	ONS	MIN	TYP‡	MAX	UNIT
VIK		$V_{CC} = 4.5 \text{ V},$	$I_{I} = -18 \text{ mA}$				-1.2	V
		$V_{CC} = 0$ ,	V <sub>I</sub> = 5.5 V				10	A
11		$V_{CC} = 5.5 \text{ V},$	$V_I = 5.5 \text{ V or GND}$			±1	μΑ	
Icc		$V_{CC} = 5.5 \text{ V},$	$I_{O} = 0,$	$V_I = V_{CC}$ or GND			3	μΑ
ΔlCC§	Control inputs	$V_{CC} = 5.5 \text{ V},$	One input at 3.4 V,	Other inputs at V <sub>CC</sub> or GND			2.5	mA
Ci	Control inputs	V <sub>I</sub> = 3 V or 0				4		pF
C <sub>io(OFF)</sub>	)	$V_{O} = 3 \text{ V or } 0,$	S0, S1, and S2 = GND			7.5		pF
		$V_{CC} = 4 V$ TYP at $V_{CC} = 4 V$	V <sub>I</sub> = 2.4 V,	I <sub>I</sub> = 15 mA		14	20	
r <sub>on</sub> ¶			., .	I <sub>I</sub> = 64 mA		4	8	Ω
		V <sub>CC</sub> = 4.5 V	V <sub>I</sub> = 0	I <sub>I</sub> = 30 mA		4	8	
			V <sub>I</sub> = 2.4 V,	I <sub>I</sub> = 15 mA		6	15	

<sup>&</sup>lt;sup>‡</sup> All typical values are at  $V_{CC} = 5 \text{ V}$  (unless otherwise noted),  $T_A = 25^{\circ}\text{C}$ .



NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

<sup>2.</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

<sup>§</sup> This is the increase in supply current for each input that is at the specified TTL voltage level, rather than VCC or GND.


<sup>¶</sup> Measured by the voltage drop between the A and B terminals at the indicated current through the switch. On-state resistance is determined by the lower of the voltages of the two (A or B) terminals.

# switching characteristics over recommended operating free-air temperature range, $C_L = 50 \text{ pF}$ (unless otherwise noted) (see Figure 1)

		TO (OUTPUT)	;	SN54CE	T16209		9	N74CB	T16209A		
PARAMETER	FROM (INPUT)		V <sub>CC</sub> = 4 V		V <sub>CC</sub> = 5 V ± 0.5 V		V <sub>CC</sub> = 4 V		V <sub>CC</sub> = 5 V ± 0.5 V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub> †	A or B	B or A				0.8*		0.35		0.25	ns
<sup>t</sup> pd	S	A or B		14	2	13.1		9.9	1.5	9	ns
t <sub>en</sub>	S	A or B		16	1.7	15.3		10.3	1.5	9.8	ns
<sup>t</sup> dis	S	A or B		14.5	1	13.2		9.3	1.5	8.8	ns

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

# PARAMETER MEASUREMENT INFORMATION

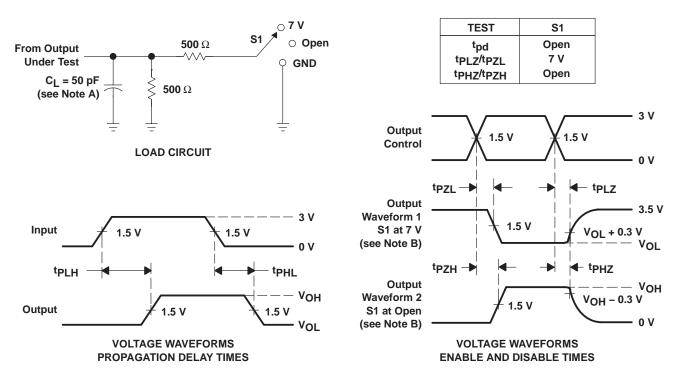

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{O} = 50 \Omega$ ,  $t_{f} \leq$  2.5 ns,  $t_{f} \leq$  2.5 ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. tpLz and tpHz are the same as tdis.
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms



<sup>†</sup> The propagation delay is the calculated RC time constant of the typical on-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).



### PACKAGE OPTION ADDENDUM



14-Feb-2021

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
SN74CBT16209ADGGR	ACTIVE	TSSOP	DGG	48	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CBT16209A	Samples
SN74CBT16209ADGVR	ACTIVE	TVSOP	DGV	48	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CY209A	Samples
SN74CBT16209ADL	ACTIVE	SSOP	DL	48	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CBT16209A	Samples
SN74CBT16209ADLR	ACTIVE	SSOP	DL	48	1000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	CBT16209A	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and



# **PACKAGE OPTION ADDENDUM**

14-Feb-2021

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# PACKAGE MATERIALS INFORMATION

www.ti.com 19-Oct-2020

# TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74CBT16209ADGGR	TSSOP	DGG	48	2000	330.0	24.4	8.6	13.0	1.8	12.0	24.0	Q1
SN74CBT16209ADGVR	TVSOP	DGV	48	2000	330.0	16.4	7.1	10.2	1.6	12.0	16.0	Q1
SN74CBT16209ADLR	SSOP	DL	48	1000	330.0	32.4	11.35	16.2	3.1	16.0	32.0	Q1

www.ti.com 19-Oct-2020



#### \*All dimensions are nominal

7 til diritoriorerio di e ricitima:							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74CBT16209ADGGR	TSSOP	DGG	48	2000	367.0	367.0	45.0
SN74CBT16209ADGVR	TVSOP	DGV	48	2000	853.0	449.0	35.0
SN74CBT16209ADLR	SSOP	DL	48	1000	367.0	367.0	55.0

# DL (R-PDSO-G48)

# PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.





SMALL OUTLINE PACKAGE



### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



# DGG (R-PDSO-G\*\*)

# PLASTIC SMALL-OUTLINE PACKAGE

#### **48 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold protrusion not to exceed 0,15.

D. Falls within JEDEC MO-153

# DGV (R-PDSO-G\*\*)

### **24 PINS SHOWN**

### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

### **IMPORTANT NOTICE AND DISCLAIMER**

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (https://www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2021, Texas Instruments Incorporated