

# RVT101HVLNWC00-B

# IPS LVDS 10.1" LCD TFT DATASHEET

Rev.1.3 2021-07-28

ITEM	CONTENTS	UNIT
LCD Type	TFT/Transmissive/Normally black/IPS	/
Size	10.1	Inch
Viewing Direction	Free	/
Outside Dimensions (W x H x D)	257.96 x 168.60 x 9.63	mm
Active Area (W x H)	216.96 x 135.60	mm
Pixel Pitch (W x H)	0.1695 x 0.1695	mm
Resolution	1280 (RGB) x 800	/
Brightness	850	cd/m²
LCD Interface Type	LVDS	/
Color Depth	16.7M	/
Pixel Arrangement	RGB Vertical Stripe	/
LCD Driver	EK79202B	/
With/Without Touch	With Projected Capacitive Touch Panel	/
CTP Driver	ILI2132A	/
Touch Interface Type	USB /I2C/ Optional UART	/
Bonding Technology	Optical Bonding	/
Weight	440	g

Note 1: RoHS3 compliant

Note 2: LCM weight tolerance: ± 5%.



# **1. REVISION RECORD**

REV NO.	REV DATE	CONTENTS	REMARKS					
1.0	2020-10-22	Initial Release						
1.1	2021-03-08	Dimension overhaul						
1.2	2021-05-26	Modify Electrical Specification and power on/off sequence Correction on touch IC PN Updating new template						
1.3	2021-07-28	Correcting the Operating/standby current From:  Operating Current						
		Operating Current         I <sub>VDD:53.5V</sub> -         280         420         mA           Standby Current         I <sub>ST</sub> -         1.5         2.0         mA						



# 2. CONTENTS

1.	REVIS	ION RECORD	2
2.	CONT	ENTS	3
3.	MODU	JLE CLASSIFICATION INFORMATION	4
4.	uxTou	ch ASSEMBLY	5
5.	MODU	JLE DRAWING	6
6.	ABSO	LUTE MAXIMUM RATINGS	7
7.	ELECT	RICAL CHARACTERISTICS	7
8.	BACK	LIGHT ELECTRICAL CHARACTERISTICS	7
9.	ELEC1	RO-OPTICAL CHARACTERISTICS	8
10.	INTE	ERFACES DESCRIPTION	10
10	). <b>1</b> TF	-T assignment	10
10		buch panel assignment	
10	. <b>3</b> C	ON1 assignment	11
10	. <b>4</b> C	DN2 assignment	11
11.	TIM	NG CHARACTERISTICS	12
11.	.1 L\	/DS interface characteristic	12
11.	. <b>2</b> Ti	ming table	12
11.	. <b>3</b> Po	ower ON/OFF sequence	13
	11.3.1	Power on sequence	13
	11.3.2	Power off sequence	13
12.	CAF	ACITIVE TOUCH SCREEN PANEL SPECIFICATIONS	14
12	. <b>1</b> M	echanical characteristics	14
12	.2 El	ectrical characteristics	14
13.	INSI	PECTION	15
13	. <b>1</b> In	spection condition	15
13	<b>.2</b> In	spection standard	16
14.	REL	IABILITY TEST	17
15.	LEG	AL INFORMATION	18



# **3. MODULE CLASSIFICATION INFORMATION**

		101								
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	

NO.	PARAMETER	SYMBOL
1.	BRAND	RV – Riverdi
2.	PRODUCT TYPE	T – TFT Standard
3.	DISPLAY SIZE	101 – 10.1"
4.	MODEL SERIAL NO.	H – High Brightness, IPS
5.	RESOLUTION	V – 1280 x 800 px
6.	INTERFACE	L – TFT LCD, LVDS
7.	FRAME	N – Without Mounting Metal Frame
8.	BACKLIGHT TYPE	W – LED White
9.	TOUCH PANEL	C – With Capacitive Touch Panel
10.	VERSION	00 – (00-99)
11.	BONDING TECHNOLOGY	B – OPTICAL BONDING



#### 4. uxTouch ASSEMBLY

uxTouch are LCD TFT displays with specially designed projected capacitive touch panels. uxTouch display can be mounted without any additional holes in the housing. Our standard uxTouch displays include double-sided adhesive tape (DST) to stick TFT easily to the housing.

uxTouch models with double-side adhesive tape can be mounted by fastening the glass to the housing.


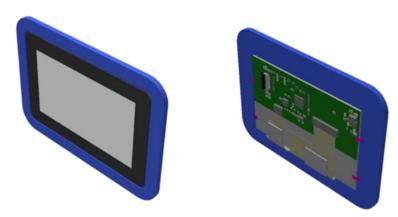


Figure 1. General view of the module



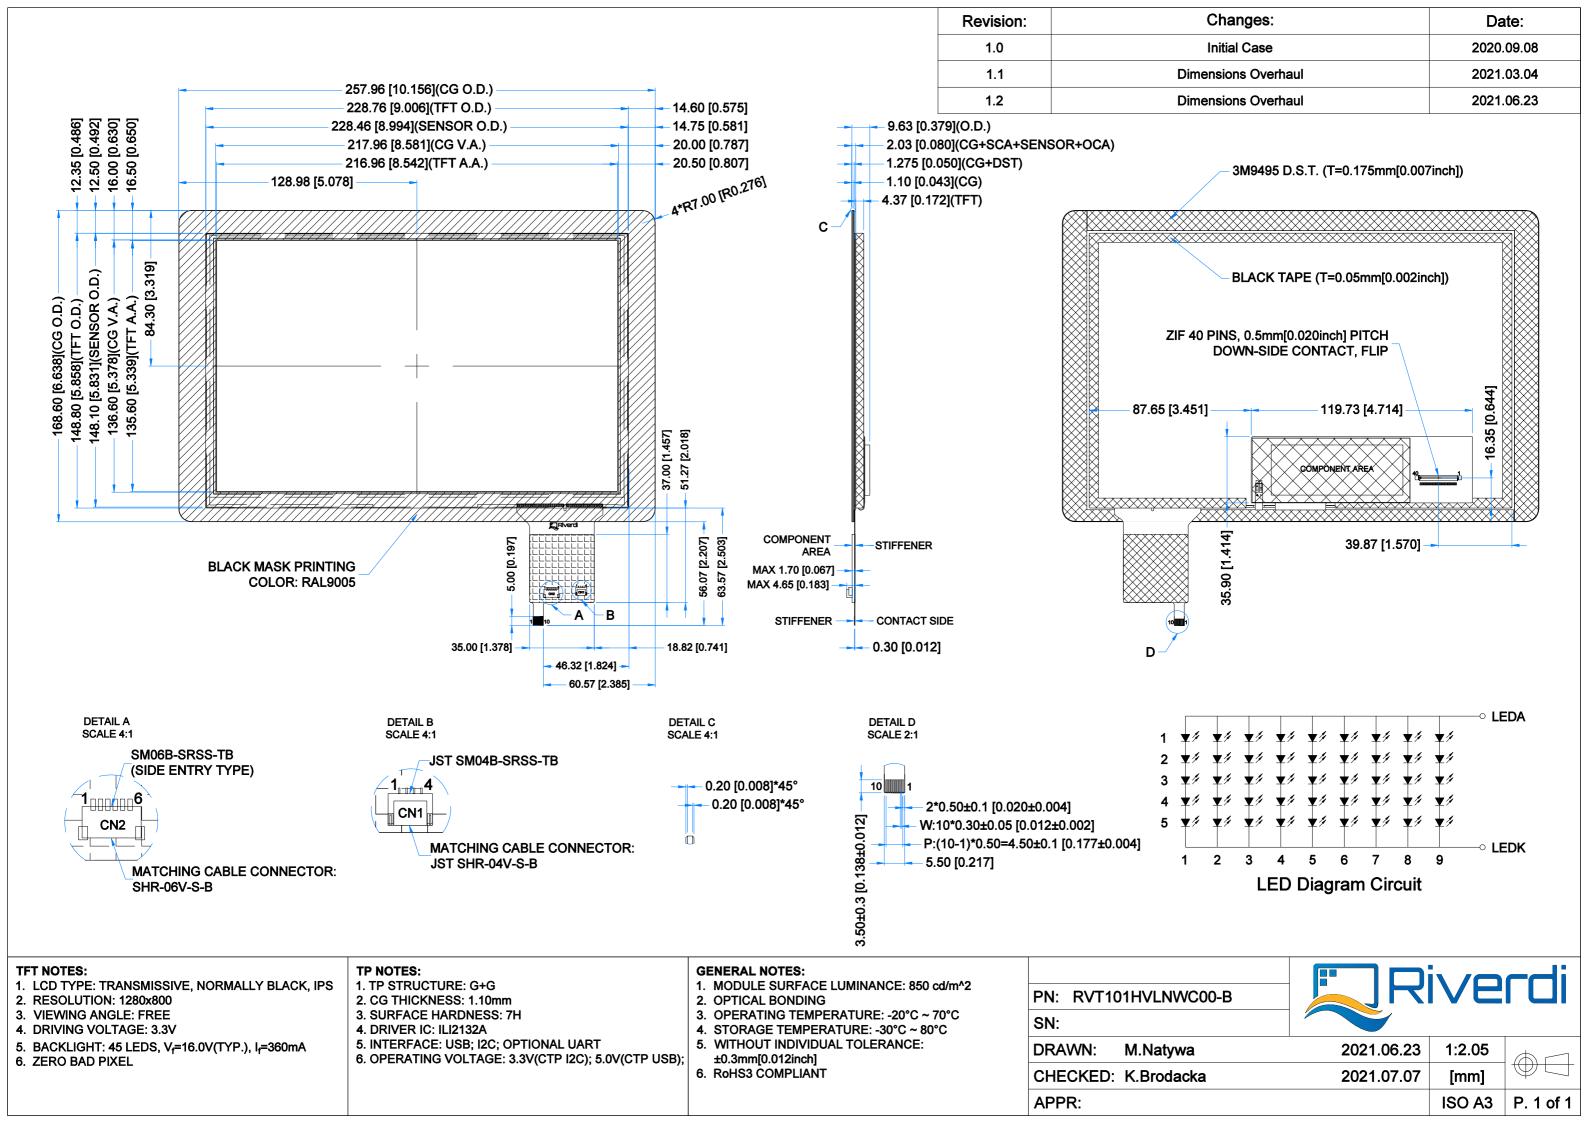

#### **6. ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	MIN	MAX	UNIT
Supply Voltage for Module	VDD	-0.3	3.9	V
Operating Temperature	T <sub>OP</sub>	-20	70	°C
Storage Temperature	T <sub>ST</sub>	-30	80	°C

**Note 1.** The absolute maximum rating values must not be exceeded at any times. The module MUST NOT be used when any of the absolute maximum ratings is exceeded.

The characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

#### 7. ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{DD}$	2.6	3.3	3.6	V
Operating Current	I <sub>VDD=3.3V</sub>	-	280	420	mA
Standby Current	I <sub>ST</sub>	-	1.5	2.0	mA


### 8. BACKLIGHT ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Backlight Driving Voltage	V <sub>F</sub>	15.0	16.0	17.0	V	
Backlight Driving Current	I <sub>F</sub>	315	360	405	mA	
Backlight Power Consumption	$W_{BL}$	-	5760	-	mW	
LED Lifetime	-	-	50,000	-	hours	Note 1

**Note 1.** Each LED:  $I_F = 40 \text{ mA}$ ,  $V_F = 3.2 \pm 0.2 \text{V}$ .

Note 2. Optical performance should be evaluated at T<sub>a</sub>=25 °C only.

**Note 3.** Operating life means the period in which the LED brightness goes down to 50% of the initial brightness. Typical operating lifetime is the estimated parameter.

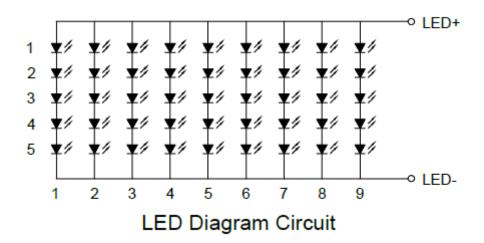



#### 9. ELECTRO-OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	RMK	NOTE
Response Time	Tr+Tf		-	25	35	ms	FIG 2.	4
Contrast Ratio	Cr	θ=0°	800	1000	-		FIG 3	1
Luminance Uniformity	δ WHITE	ø=0° Ta=25 °C	-	75	-	%	FIG 3.	3
Surface Luminance	Lv	14-25 C	-	850	-	cd/m²	FIG 3.	2
		ø = 90°	75	85	-	deg	FIG 4.	FIG 4. FIG 4. FIG 4.
Viewing Angle	θ	ø = 270°	75	85	-	deg	FIG 4.	
Range		ø = O°	75	85	-	deg	FIG 4.	
		ø = 180°	75	85	-	deg	FIG 4.	
	Rx		0.22	0.26	0.30	-	510.7	5
	Ry		0.20	0.24	0.28	-		
	Gx	θ=O°	0.34	0.38	0.42	-		
CIE (x, y)	Gy	ø=0°	0.50	0.54	0.58	-		
Chromaticity	Bx	∞-0 Ta=25 °C	0.10	0.14	0.18	-	FIG 3.	5
	Ву	1a-25 C	0.09	0.13	0.17	-		
	Wx		0.28	0.32	0.36	-		
	Wy		0.29	0.33	0.37	-		

**Note 1.** Contrast Ratio (CR) is defined mathematically as below, for more information see Figure 3.

Contrast Ratio =  $\frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5)}}$ 

**Note 2.** Surface luminance is the LCD surface from the surface with all pixels displaying white. For more information see Figure 3.

Lv = Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5)

**Note 3.** The uniformity in surface luminance  $\delta$  WHITE is determined by measuring luminance at each test position 1 through 5, and then dividing the minimum luminance of 5 points luminance by maximum luminance of 5 points luminance. For more information see Figure 3.

 $\delta \text{ WHITE } = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3, P4, P5)}}$ 

**Note 4.** Response time is the time required for the display to transition from white to black (Rise Time, Tr) and from black to white (Decay Time, Tf). For additional information see Figure 2. The test equipment is Autronic-Melchers's ConoScope series.

**Note 5.** CIE (x, y) chromaticity, the x, y value is determined by measuring luminance at each test position 1 through 5, and then make average value.

**Note 6.** Viewing angle is the angle at which the contrast ratio is greater than 2. For TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to LCD surface. For more information see Figure 4.



**Note 7.** For viewing angle and response time testing, the testing data is based on Autronic-Melchers's ConoScope series. Instruments for Contrast Ratio, Surface Luminance, Luminance Uniformity, CIE the test data is based on TOPCON's BM-5 photo detector.

Figure 2. The definition of response time


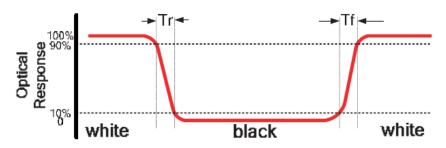


Figure 3. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity



A: 5mm


B:5mm

H, V: Active Area

Light spot size Ø=5mm, 500mm distance from the LCD surface to detector lens.

Measurement instrument is TOPCON'S luminance meter BM-5

Figure 4. The definition of viewing angle





## 10. INTERFACES DESCRIPTION

# **10.1 TFT assignment**

10.1 11 1 d.s.			
PIN NO.	SYMBOL	I/O	DESCRIPTION
1	NC	-	No Connection
2	$V_{DD}$	Р	Power Supply, 3.3V
3	$V_{DD}$	Р	Power Supply, 3.3V
4	NC	-	No Connection
5	NC	-	No Connection
6	NC	-	No Connection
7	GND	Р	Ground
8	Rxin0-	I	-LVDS Differential Data Input
9	Rxin0+	I	+LVDS Differential Data Input
10	GND	Р	Ground
11	Rxin1-	I	-LVDS Differential Data Input
12	Rxin1+	I	+LVDS Differential Data Input
13	GND	Р	Ground
14	Rxin2-	I	-LVDS Differential Data Input
15	Rxin2+	I	+LVDS Differential Data Input
16	GND	Р	Ground
17	RxCLK-	I	-LVDS Differential Data Input
18	RxCLK+	I	+LVDS Differential Data Input
19	GND	Р	Ground
20	Rxin3-	I	-LVDS Differential Data Input
21	Rxin3+	I	+LVDS Differential Data Input
22	GND	Р	Ground
23	NC	-	No Connection
24	NC	-	No Connection
25	GND	Р	Ground
26	NC	-	No Connection
27	NC	-	No Connection
28	NC	-	No Connection
29	NC	-	No Connection
30	GND	Р	Ground
31	LED-	Р	LED Cathode
32	LED-	Р	LED Cathode
33	NC	-	No Connection
34	NC	-	No Connection
35	NC	-	No Connection
36	NC	-	No Connection
37	NC	-	No Connection
38	NC	-	No Connection
39	LED+	Р	LED Anode
40	LED+	Р	LED Anode
10			LLD / WIOGO

Note 1. I: input, P: Power



# **10.2** Touch panel assignment

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	USB_GND	USB_ Ground	
2	USB_VDD	USB Power for CTP, 5.0V	
3	USB_D-	USB _Data Signal –	
4	USB_D+	USB _Data Signal +	
5	I2C_GND	I2C _ Ground	
6	I2C_VDD	I2C _Power for CTP, 3.3 V	
7	I2C_RST	I2C _Reset Pin, Active low	
8	I2C_SCL	I2C _Clock Input	Note 1
9	I2C_INT	I2C _Interrupt Signal from CTP, Active low	
10	I2C_SDA	I2C _Data Signal	

**Note 1.** External pull-up resistors are required.

# **10.3** CON1 assignment

PIN NO.	SYMBOL	DESCRIPTION
1	USB_VDD	USB_Power for CTP, DC 5.0V
2	USB_D-	USB _Data Signal -
3	USB_D+	USB _Data Signal +
4	USB_GND	USB_Ground

# 10.4 CON2 assignment

PIN NO.	SYMBOL	DESCRIPTION	NOTE
1	I2C_GND	I2C _ Ground	
2	I2C_VDD	I2C _Power for CTP, 3.3 V	
3	I2C_RST	I2C _Reset Pin, Active low	
4	I2C_SCL	I2C _Clock Input	Note 1
5	I2C_INT	I2C _Interrupt Signal from CTP, Active low	
6	I2C_SDA	I2C _Data Signal	


**Note 1.** External pull-up resistors are required.



#### 11. TIMING CHARACTERISTICS

#### 11.1 LVDS interface characteristic

**VESA Format: 8-bit LVDS input, (LVBIT=H, LVFMT=H)** 

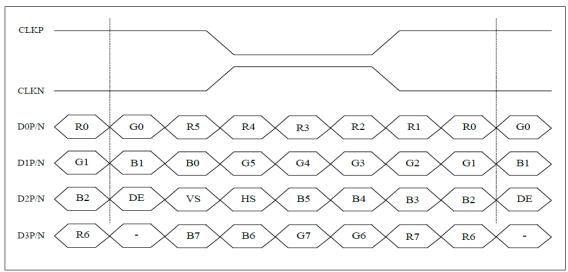

Note 1: Control signals DE VS HS: Active Low


# 11.2 Timing table

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Clock Frequency	FDCLK	66.3	72.4	78.9	MHz
(Rate=60Hz (LVDS))					
HSYNC Period Time	T <sub>H</sub>	1380	1440	1500	DCLK
Horizontal Display area	T <sub>HD</sub>		1280		DCLK
Hsync pulse Width	$T_{HPW}$	1	-	40	Тс
Hsync Back Porch	T <sub>HBP</sub>	88	88	88	DCLK
(With pulse width)					
Hsync Front Porch	$T_{HFP}$	12	72	132	DCLK
VSYNC Period Time	T <sub>V</sub>	824	838	872	
Vertical Display area	T <sub>VD</sub>		800		Н
Vsync pulse Width	T <sub>VW</sub>	1	-	20	
Vsync Back Porch	$T_{VBP}$	23	23	23	
(With pulse width)					
Vsync Front Porch	$T_{VFP}$	1	15	49	




# 11.3 Power ON/OFF sequence

## 11.3.1 Power on sequence

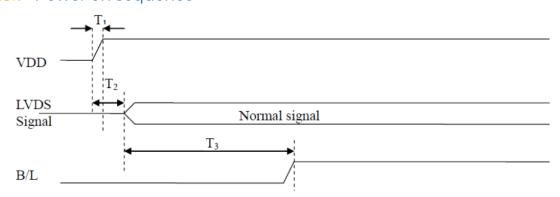

PARAMETER	VALUE			UNIT
	MIN.	TYP.	MAX.	
П	0.5	2	10	ms
T2	0	5	50	
T3	130	136	210	

### 11.3.2 Power off sequence

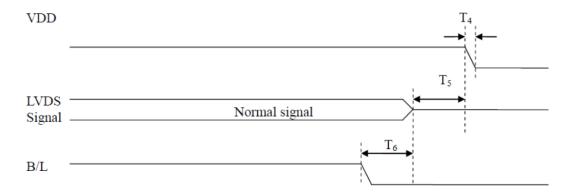

PARAMETER	VALUE			UNIT
	MIN.	TYP.	MAX.	
T4	0.5	2	10	ms
T5	0	7	50	
T6	0	2	100	



## **12. CAPACITIVE TOUCH SCREEN PANEL SPECIFICATIONS**

### 12.1 Mechanical characteristics

DESCRIPTION	SPECIFICATION	REMARK
Touch Panel Size	10.1 inch	
Outline Dimension of CTP	257.96 mm x 168.60 mm	
Product Thickness	2.03mm	
Glass Thickness	1.1 mm	
CTP View Area	217.96 mm x 136.60 mm	uxTouch
Sensor Active Area	218.96 mm x 137.60 mm	
Surface Hardness	7H	

### **12.2** Electrical characteristics

DESCRIPTION		SPECIFICATION
Power Consumption (IDD)	Active Mode	90 mA
	Sleep Mode	10 mA
Linearity		+/- 1.5mm
Controller		ILI2132A
Resolution		1280 x 800



#### 13. INSPECTION

Standard acceptance/rejection criteria for TFT module


## **13.1** Inspection condition

Ambient conditions:

- Temperature: 25 ± 2°C
- Humidity: (60 ± 10) %RH
- Illumination: Single fluorescent lamp non-directive (300 to 700 lux)

Viewing distance: 35 ± 5cm between inspector bare eye and LCD.

Viewing Angle: U/D: 45°/45°, L/R: 45°/45°

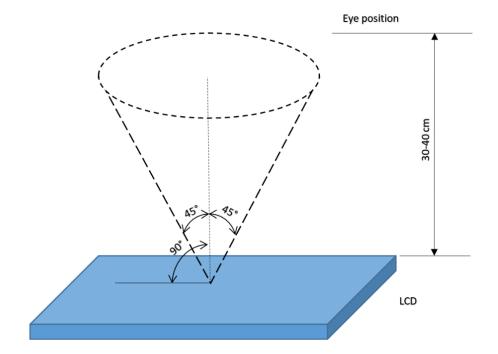



# 13.2 Inspection standard

The LCD TFT has zero bad pixels. Please refer the item "Bright/Dark dots".

ITEM		CRITE	RION	١			
L	x		Size = 10.1"				
Black spots, white spots,			Average Diameter		Qualified Qty		
light leakage, Foreign Particle		D ≤ 0.2 m	nm		Ignored		
(round Type) D=(x	+v1/2	0.2 mm <	< D ≤ C	).3 mm	N≤4	N≤4	
	s density: 10 mm	0.5mm <	D		Not	allowed	
	Width —→			Size = 10	.1"		
LCD black spots,	$\overline{}$	Lengt	:h	Width		Qualified Qty	
white spots, light leakage	Length	-		W ≤ 0.0	5	Ignored	
(line Type)	(	L ≤ 5.0	0	0.05< W ≤	0.1	N≤3	
Spot	s density: 10 mm	5.0 <	L	0.10< W 5.0 < L		Not allowed	
	Size = 10.1						
	Item			Qualified Qty			
Bright/Dark	Bright dots				0		
Dots	Dark dots		0				
	Cluster Bright Dots or Dark Dots						
	Total Bright and Dar		0				
	Size ≥ 5.0"						
	Average Diameter			Qualified Qty			
	D < 0.2 mm			Ignored			
Clear spots	0.2 mm < D < 0.3 mm			4			
	0.3 mm < D < 0.5 mm		2				
Coat	0.5 mm < D 0						
Spot	Spots density: 10 mm Size ≥ 5.0"						
				Qualified Qty			
Touch panel	Average Diameter D < 0.25 mm			Ignored			
spots	0.25 mm < D < 0.5 mm		4				
	0.25 mm < D		0				
	0.5 mm < D 0						
			Qualified Qty				
Touch panel	Length	- W < 0.03		Ignored			
Touch panel white line					nore		
	- W				nore		



### **14. RELIABILITY TEST**

NO.	TEST ITEM	TEST CONDITION	NOTE
1	High Temperature Storage	80°C/120 hours	
2	Low Temperature Storage	-30°C/120 hours	
3	High Temperature Operating	70 °C /120 hours	Note 1
4	Low Temperature Operating	-20°C/120 hours	
5	High Temperature and High Humidity	Humidity 40°C, 90%RH, 120Hrs	
6	Thermal Cycling Test (No operation)	-20°C for 30min, 70°C for 30 min. 100 cycles. Then test at room temperature after 1 hour	Note 2
7	Vibration Test	Frequency: 10 ÷ 55 Hz. Stroke: 1.5 mm. Sweep: 10Hz ÷ 55Hz ÷ 10 Hz. 2 hours for each direction of X, Y, Z (Total 6 hours)	
8	Package Drop Test	Height: 60 cm 1 corner, 3 edges, 6 surfaces	

**Note 1.** Sample quantity for each test item is  $5 \div 10$  pcs.

**Note 2**. Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.



#### **15.LEGAL INFORMATION**

Riverdi grants the guarantee for the proper operation of the goods for a period of 12 months from the date of possession of the goods. If in a consequence of this guaranteed execution the customer has received the defects-free item as replacement for the defective item, the effectiveness period of this guarantee shall start anew from the moment the customer receives the defects-free item.

Information about device is the property of Riverdi and may be the subject of patents pending or granted. It is not allowed to copy or disclosed this document without prior written permission.

Riverdi endeavors to ensure that all contained information in this document is correct but does not accept liability for any error or omission. Riverdi products are in developing process and published information may be not up to date. Riverdi reserves the right to update and makes changes to Specifications or written material without prior notice at any time. It is important to check the current position with Riverdi.

Images and graphics used in this document are only for illustrative the purpose. All images and graphics are possible to be displayed on the range products of Riverdi, however the quality may vary. Riverdi is no liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) relating to any product, service provided or to be provided by Riverdi, or the use or inability to use the same, even if Riverdi has been advised of the possibility of such damages.

Riverdi products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail–safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High-Risk Activities'). Riverdi and its suppliers specifically disclaim any expressed or implied warranty of fitness for High-Risk Activities. Using Riverdi products and devices in 'High-Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Riverdi from all damages, claims or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Riverdi intellectual property rights.

Hi, I am here to help you!
If you have any additional
questions, please contact
our support via email:
contact@riverdi.com

