



DRTR5V0U2SO

Product Summary

VBR (Min)	IPP (Max)	Ст (Тур)
6V	6A	1.0pF

Description

This new generation TVS is designed to protect sensitive electronics from the damage due to ESD. The combination of small size and high ESD surge capability makes it ideal for use in portable applications such as cellular phones, digital cameras, and MP3 players.

Applications

- Cellular Handsets
- Portable Electronics
- Computers and Peripheral


2 CHANNEL LOW CAPACITANCE TVS DIODE ARRAY

Features

- Provides ESD Protection per IEC 61000-4-2 Standard: Air ±30kV. Contact ±25kV
- 2 Channels of ESD Protection
- Low Channel Input Capacitance
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please contact us or your local Diodes representative. https://www.diodes.com/guality/product-definitions/

Mechanical Data

- Case: SOT26
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed Over Copper Leadframe (Lead Free Plating) Solderable per MIL-STD-202, Method 208(3)
- Weight: 0.016 grams (Approximate)



Ordering Information (Note 4)

Part Number	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Packaging
DRTR5V0U2SO-7	Standard	UV8	7	8	3,000/Tape & Reel

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. Notes:

SOT26

2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

Marking Information

Γ		\square	[
	U	V 8		T M		
Τ						

UV8 = Product Type Marking Code YM = Date Code Marking Y = Year (ex: H = 2020) M = Month (ex: 9 = September)

Date Code Key												
Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031
Code	Н		J	K	L	М	Ν	0	Р	R	S	Т
-	, ,							1				
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Νον	Dec



Top View

SOT26



Maximum Ratings (@TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	Conditions
Peak Pulse Current	IPP	6	А	8/20µs (Note 7)
ESD Protection – Contact Discharge	VESD_Contact	±25	kV	Standard IEC 61000-4-2
ESD Protection – Air Discharge	VESD_Air	±30	kV	Standard IEC 61000-4-2

Thermal Characteristics

h			
Characteristic	Symbol	Value	Unit
Power Dissipation (Note 5)	PD	300	mW
Thermal Resistance, Junction to Ambient $T_A = +25^{\circ}C$	R _{0JA}	417	°C/W
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150	°C

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Тур	Max	Unit	Test Conditions
Reverse Standoff Voltage	VRWM	—	—	5.5	V	—
Channel Leakage Current (Note 6)	IR	_	1	100	nA	$V_R = 5V$, Any I/O to GND
Reverse Breakdown Voltage	VBR	6.0	—	9.0	V	IR = 1mA, from pin 5 to pin 2
Clamping Voltage, Positive Transients			10	12	V	I _{PP} = 1A, t _P = 8/20µs
(Note 7)	Vc		16.5	19	v	IPP = 6A, tP = 8/20µs
Channel Input Capacitance (Note 8)	Ст	_	1.0	1.5	pF	$V_R = 0V$, f = 1MHz, Any I/O to GND
Dynamic Resistance	Rdyn	_	0.9	_	Ω	IPP = 1A, tP = 8/20µs

5. Device mounted on FR-4 PCB pad layout (2oz copper) as shown on Diodes Incorporated suggested pad layout, which can be found on our website at http://www.diodes.com.


6. Short duration pulse test used to minimize self-heating effect. 7. Clamping voltage value is based on an $8x20\mu s$ peak pulse current (I_{PP}) waveform.

8. Measured from any I/O to GND.


Notes:

9. For information on the impact of Diodes' USB 2.0 compatible ESD protectors on signal integrity including eye diagram plots, please refer to AN77 at the following URL: http://www.diodes.com/destools/appnote_dnote.html.



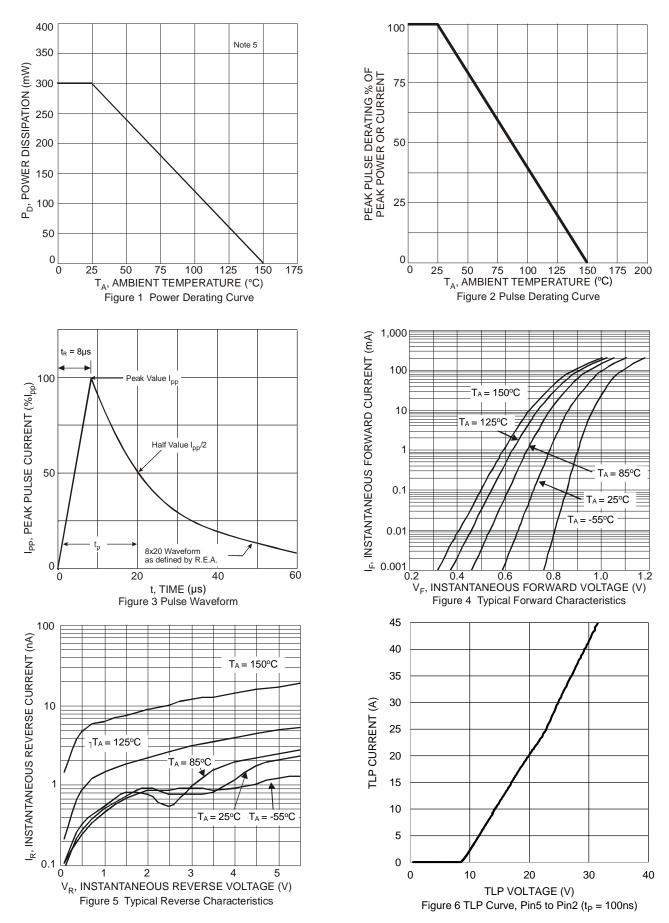




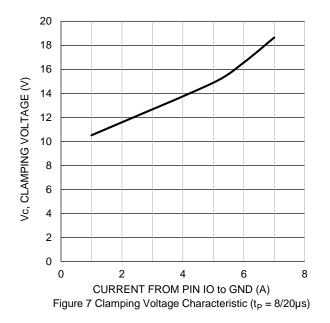




Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

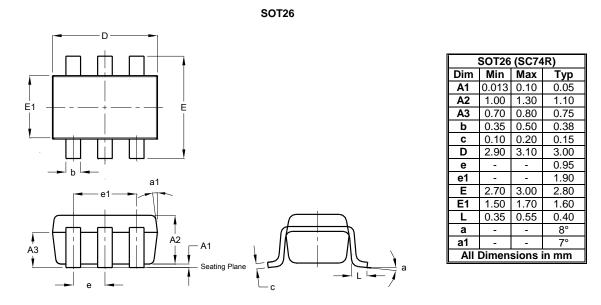

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.



SOT26

Dimensions	Value (in mm)
С	2.40
C1	0.95
G	1.60
Х	0.55
Ŷ	0.80
Y1	3.20



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com