



450V NPN HIGH VOLTAGE POWER TRANSISTOR IN SOT223

Features

- BV_{CEO} > 450V
- BV_{CES} > 700V
- BV_{EBO} > 9V
- I_C = 1.5A high Continuous Collector Current
- Integrated Collector-Emitter Diode to act as free-wheeling diode
- Totally Lead-Free & Fully RoHS compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

Mechanical Data

- Case: SOT223
- Case Material: Molded Plastic. "Green" Molding Compound UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.112 grams (approximate)

Applications


Low power AC-DC SMPS for:

- Battery Chargers for Mobile Phone / Tablets / Smartphones
- Power Supply for DVD / STB
- LED Lighting






Top View



Device Schematic



Top View Pin-Out


Ordering Information (Note 4)

Product	Package	Marking	Tape Width (mm)	Quantity
DXT13003DG-13	SOT223	DXT13003D	12	2,500

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- 2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at http://www.diodes.com/products/packages.html

Marking Information



13003D = Product Type Marking Code YWW = Date Code Marking Y = Last Digit of the Year (ex: 3 =2013) WW = Week Code 01-52



Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Emitter Voltage (V _{BE} = 0V)	V _{CES}	700	V
Collector-Emitter Voltage	V_{CEO}	450	V
Emitter-Base Voltage	V_{EBO}	9	V
Continuous Collector Current	Ic	1.3	Α
Peak Pulse Collector Current	Ісм	3	Α
Continuous Base Current	l _Β	0.75	Α
Peak Pulse Base Current	I _{BM}	1.5	Α

Thermal Characteristics ($@T_A = +25^{\circ}C$, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	
	(Note 5)		3	
Power Dissipation	(Note 6)	P_{D}	2	W
	(Note 7)		0.7	
	(Note 5)	$R_{ heta JA}$	42	
Thermal Resistance, Junction to Ambient	(Note 6)	$R_{ heta JA}$	62.5	°C/M
	(Note 7)	$R_{ heta JA}$	178	°C/W
Thermal Resistance Junction to Lead	(Note 8)	$R_{ heta JL}$	17	
Operating and Storage Temperature Range		T _J , T _{STG}	-55 to +150	°C

ESD Ratings (Note 9)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	8,000	V	3B
Electrostatic Discharge - Machine Model	ESD MM	400	V	С

Notes:

- 5. For a device mounted with the collector lead on 50mm x 50mm 2oz copper that is on a single-sided 1.6mm FR4 PCB; device is measured under For a device mounted with the collector lead on summ x summ 2oz copper that is on a setill air conditions whilst operating in a steady-state.
 Same as note (5), except the device is mounted on 25mm x 25mm 2oz copper.
 Same as note (5), except the device is mounted on minimum recommended pad layout.
 Thermal resistance from junction to solder-point (at the end of the collector lead).
 Refer to JEDEC specification JESD22-A114 and JESD22-A115.



Safe Operating Areas and Derating Information (@TA = +25°C, unless otherwise specified.)

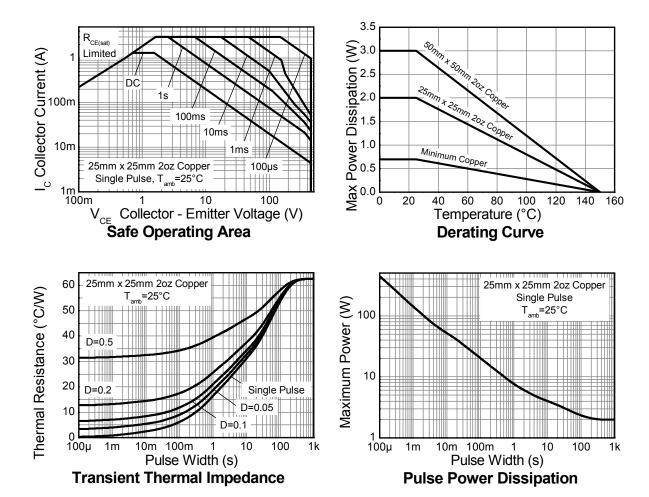





Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Emitter Breakdown Voltage	BV _{CES}	700	-	-	V	$I_C = 100 \mu A, V_{BE} = 0 V$
Collector-Emitter Breakdown Voltage	BV_CEO	450	-	-	V	I _C = 100μA
Emitter-Base Breakdown Voltage	BV _{EBO}	9	-	=	V	I _E = 100μA
Collector Cutoff Current	I _{CEV}	-	-	10	μA	V _{CE} = 700V, V _{BE} = -1.5V
DC current transfer Static ratio (Note 10)	h _{FE}	20 16 5.0		40 30 25	-	I_C = 20mA, V_{CE} = 10V I_C = 0.5A, V_{CE} = 2V I_C = 1.0A, V_{CE} = 2V
Collector-Emitter Saturation Voltage (Note 10)	V _{CE(sat)}	-	-	0.3 0.4	V	$I_C = 0.5A, I_B = 0.1A$ $I_C = 1A, I_B = 0.25A$
Base-Emitter Saturation Voltage (Note 10)	$V_{BE(sat)}$	-	1 1	1.0 1.2	V	$I_C = 0.5A$, $I_B = 0.1A$ $I_C = 1A$, $I_B = 0.25A$
Output Capacitance	C_ob	=	18	=	pF	V _{CB} = 10V, f = 0.1MHz
Transition Frequency	f _T	4	-	-	MHz	I _C = 0.1A, V _{CE} = 10V
Turn-on Time with Resistive Load	ton	-	-	0.7		
Storage Time with Resistive Load	ts	-	-	3.0	μs	$I_C = 1A, V_{CC} = 125V, I_{B1} = 0.2A,$ $I_{B2} = -0.2A$
Fall Time with Resistive Load	t _f	=	=	0.35		18Z0.2A

Note: 10. Measured under pulsed conditions. Pulse width ≤ 300µs. Duty cycle ≤2%.


Typical Electrical Characteristics (@TA = +25°C, unless otherwise specified.)








Collector-Emitter Saturation Region



DC Current Gain




Base-Emitter Saturation Voltage



Package Outline Dimensions


Please see AP02002 at http://www.diodes.com/datasheets/ap02002.pdf for latest version.



SOT223					
Dim	Min	Max	Тур		
Α	1.55	1.65	1.60		
A1	0.010	0.15	0.05		
b	0.60	0.80	0.70		
b1	2.90	3.10	3.00		
С	0.20	0.30	0.25		
D	6.45	6.55	6.50		
Е	3.45	3.55	3.50		
E1	6.90	7.10	7.00		
е	-	-	4.60		
e1	-	1	2.30		
L	0.85	1.05	0.95		
Q	0.84	0.94	0.89		
All Dimensions in mm					

Suggested Pad Layout

Please see AP02001 at http://www.diodes.com/datasheets/ap02001.pdf for the latest version.



Dimensions	Value (in mm)
X1	3.3
X2	1.2
Y1	1.6
Y2	1.6
C1	6.4
C2	2.3

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

DXT13003DG-13