


**15500 Series Heavy-Duty Bayonet Knob In-Line Holders for 3AG/AB Fuses**



**Dimensions**

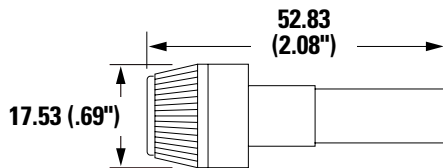

**Additional Information**



Datasheet



Resources



Samples

**Ordering Information**

Unassembled			Assembled			Packaging
Ordering Number	Catalog Number	For Fuse Size	Ordering Number	Catalog Number	Fuse Installed	
01550004ZXU	155 004U	¼" × 5/8"	01550004ZXA	155 004A	SFE 4	Bulk Pack (100 Pcs)
01550006ZXU	155 006U	¼" × ¾"	01550006ZXA	155 006A	SFE 6	Bulk Pack (100 Pcs)
01550009ZXU	155 009U	¼" × 7/8"	01550009ZXA	155 009A	SFE 9	Bulk Pack (100 Pcs)
01550014ZXU	155 014U	¼" × 1 1/16"	01550014ZXA	155 014A	SFE 14	Bulk Pack (100 Pcs)
01550020ZXU	155 020U	¼" × 1 ¼"	01550020ZXA	155 020A	SFE 20	Bulk Pack (100 Pcs)
-	-	¼" × 1 ¼"	01500079Z	-	-	Bulk Pack (100 Pcs)
-	-	¼" × 1 ¼"	01500145HXB*	-	-	Bulk Pack (100 Pcs)
-	-	¼" × 7/8"	01500145Z**	-	-	Bulk Pack (100 Pcs)
-	-	¼" × 1 1/16"				
-	-	¼" × 1 ¼"				

\* Supplied with 15" loop of #14 AWG red vinyl insulated wire

\*\* Supplied with 15" loop of #14 AWG red vinyl insulated wire and three springs in different lengths to accommodate SFE sized fuses.

**Warning:** Electrical Shock. Power must be disconnected prior to handling fuse.

**Product Characteristics**

Compatible Fuses	For Low voltage 3AG/AB or SFE Fuse Applications
<b>Electrical</b>	Intended for use at 32 volts or less with fuses rated up to 20 amperes when the proper spring is installed for full size.
<b>Molded Parts</b>	Body and knob are Black Thermoset (UL94 V-0). Both body and knob have a .20" diameter hole for insulated wire.
<b>Knob</b>	Bayonet-lock type metal insert.
<b>Ambient Temperature</b>	-40°C to +125°C.
<b>Contact Rivet</b>	Brass. Tin plated. Designed to accommodate #14 AWG stranded wire.
<b>Assembled</b>	Supplied with 19" loop of #14 AWG red vinyl insulated wire, SFE fuse (listed) with a spring in different lengths depending of the fuse size.
<b>Unassembled</b>	For assembly to #14 AWG wire.
<b>Options</b>	150 079 is similar to 155 020A except no fuse is supplied. It is intended for use with 3AG fuses rated up to 20 amperes.
<b>In-Line Fuseholder</b>	Supplied with a spring in different lengths depending of the fuse size.

\*Refer to Fuseology for information on proper fuseholder re-rating.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Littelfuse:

[150261](#) [155020U](#) [01500261Z](#) [155120U](#) [150274](#) [01550014ZXU](#) [01550020ZXA](#) [01550004ZXU](#) [01500079Z](#)  
[01550014ZXA](#) [01550006ZXA](#) [01550006ZXU](#) [155100](#) [01550020ZXU](#) [155006U](#) [01550009ZXA](#) [01550004ZXA](#)  
[01550009ZXU](#) [150309](#) [01500309Z](#) [150215](#) [150145](#) [01500274LXN](#) [01500145Z](#) [01550400LXN](#) [155020](#) [155100-1](#)