



T-3 1/4 Miniature Bayonet Base

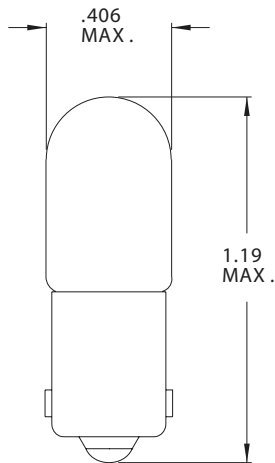

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1826 | 18.0 | .15 | 1.8 | 250 | C-2V |
| CM1437 | 24.0 | .06 | .90 | 20 | C-2F |
| CM1818 | 24.0 | .17 | 3.3 | 250 | C-2V |
| CM313 | 28.0 | .17 | 3.5 | 500 | C-2F |
| CM757 | 28.0 | .08 | .62 | 7,500 | C-2F |
| CM1819 | 28.0 | .04 | .34 | 2,500 | C-2F |
| CM1820 | 28.0 | .10 | 1.6 | 1,000 | C-2F |
| CM1829 | 28.0 | .07 | 1.0 | 1,000 | C-2F |
| CM1843 | 28.0 | .02 | .20 | 3,000 | C-2F |
| CM1864 | 28.0 | .17 | 3.0 | 1,500 | C-2F |
| CM1873 | 28.0 | .20 | 3.0 | 7,000 | C-2F |
| CM1822 | 36.0 | .10 | 2.1 | 1,000 | C-2F |
| CM1828 | 37.5 | .05 | .65 | 3,000 | C-2F |
| CM1835 | 55.0 | .05 | 1.1 | 5,000 | C-5 |
| CM8-3995 | 130.0 | .02 | .20 | 2,000 | C-5 |
| CM949 | 130.0 | .022 | .40 | 2,000 | 2CC-2F |

T-3 1/4 Miniature Screw Base

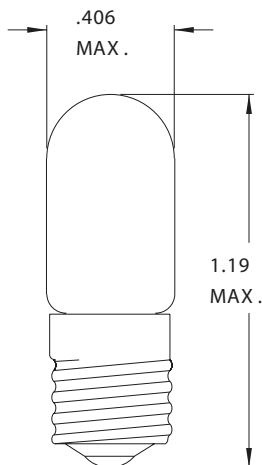

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM1800 | 1.35 | .06 | .07 | 500 | S-2 |
| CM48 | 2.00 | .06 | .04 | 1000 | S-2 |
| CM41 | 2.50 | .50 | .50 | 3000 | C-2R |
| CM42 | 3.20 | .35 | .50 | 3000 | C-2R |
| CM40 | 6.30 | .15 | .50 | 3000 | C-2R |
| CM46 | 6.30 | .25 | .90 | 3000 | C-2R |
| CM1481 | 14.0 | .15 | 1.5 | 200 | C-2V |
| CM1487 | 14.0 | .20 | 1.4 | 3000 | C-2V |
| CM1821 | 28.0 | .17 | 3.4 | 500 | C-2F |
| CM1832 | 37.5 | .05 | .65 | 3000 | C-2F |
| CM1823 | 48.0 | .10 | 3.2 | 1000 | C-2F |
| CM750 | 55.0 | .05 | .72 | 7500 | C-13 |
| CM8-3994 | 130.0 | .02 | .20 | 2000 | C-5 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[8-3995](#) [8-3995-10](#)