

330-003 and 330-004 Pipe Thread Adapter Direct Coupling



CONNECTOR DESIGNATORS A-B*-C-D-E-F G-H-J-K-L-S

* Conn. Desig. B See Note 3
**DIRECT
COUPLING**

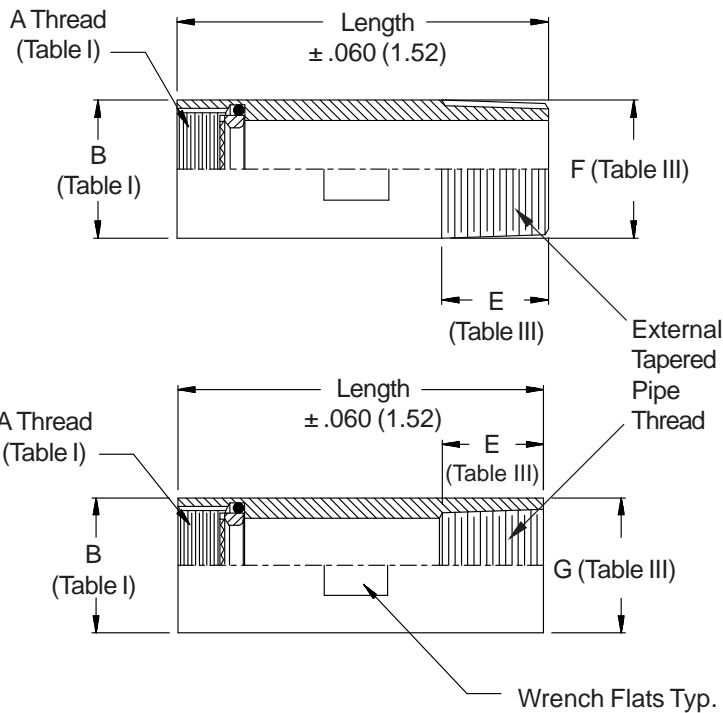
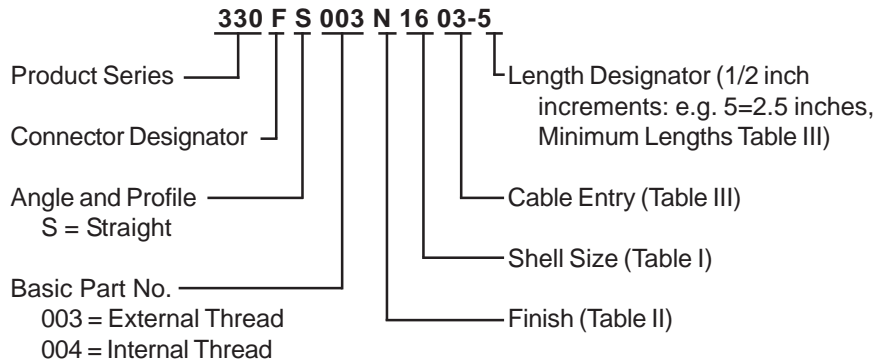


TABLE II: STANDARD FINISHES

GLENAIR SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
C	Anodize, Black
G	Hard Coat, Anodic
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel

See Back Cover for Complete Finish Information and Additional Finish Options

See inside back cover fold-out or pages 13 and 14 for unbridged Tables I and II.

TABLE III: CABLE ENTRY

Dash No.	Pipe Thread	E	F Dia	G Dia	Length	
					Min	Desig.
01	1/8	.391 (9.9)	.405 (10.3)	.500 (12.7)	2.0 (50.8)	4
02	1/4	.593 (15.1)	.540 (13.7)	.625 (15.9)	2.0 (50.8)	4
03	3/8	.593 (15.1)	.675 (17.1)	.875 (22.2)	2.0 (50.8)	4
04	1/2	.781 (19.8)	.840 (21.3)	1.000 (25.4)	2.5 (63.5)	5
05	3/4	.812 (20.6)	1.050 (26.7)	1.250 (31.8)	2.5 (63.5)	5
06	1	1.000 (25.4)	1.315 (33.4)	1.500 (38.1)	2.5 (63.5)	5
07	1 1/4	1.031 (26.2)	1.660 (42.2)	1.750 (44.5)	3.0 (76.2)	6
08	1 1/2	1.031 (26.2)	1.900 (48.3)	2.125 (54.0)	3.0 (76.2)	6
09	2	1.062 (27.0)	2.375 (60.3)	2.500 (63.5)	3.0 (76.2)	6
10	2 1/2	1.453 (36.9)	2.875 (73.0)	3.250 (82.6)	3.0 (76.2)	6

1. Pipe threads per American standard taper pipe thread.
2. Metric dimensions (mm) are indicated in parentheses.
3. When using Connector Designator B refer to pages 18 and 19 for part number development.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[330AS001N1005-4](#) [330AS002N1805-4](#) [330BS004B1805-5N](#) [330BS004B2105-5A](#) [330BS004B2105-5A-705](#)
[330BS004C1704-4A-705](#) [330BS004C2304-4A-705](#) [330BS004C3107-4A-705](#) [330BS004N1104-4A](#) [330BS004N1404-4A](#) [330BS004N1604-4A](#) [330FS002N1004-4](#) [330FS002N1404-4](#) [330KS004N4004-5](#) [330BS003B1404-3A](#)
[330BS004B2005-6A](#) [330DS003B1004-5](#) [330AS004NF2206-4](#) [330BS003B1404-4A](#) [330BS003B1504-4A](#)
[330BS003B1604-5A](#) [330BS003B2006-5A](#) [330BS003NF2105-5A](#) [330BS004A2105-4A-705](#) [330BS004B2404-4L](#)
[330BS004B2506-5H](#) [330BS004B2806-4L](#) [330BS004C3108-4A-705](#) [330BS004N3307-5L](#) [330BS004NF2105-5A-705](#)
[330DS004B2005-5](#) [330DS004B2006-5](#) [330DS004M1204-5](#) [330DS004M1805-5](#) [330DS004M2004-5](#)
[330DS004M2005-5](#) [330DS004M2206-5](#) [330DS004N1403-4](#) [330DS004N1604-5](#) [330DS004NF0804-6](#)
[330FS004M2406-5](#) [330KS004M1405-5](#) [330KS004M1806-5](#) [330KS004M2006-5](#) [330KS004M4009-6](#)
[330BS003B0804-5A](#) [330BS003B1005-4H](#) [330KS004M1805-5](#) [330DS004C1403-4](#) [330BS004B2004-5A](#)
[330AS004M2206-6](#) [330AS004M1805-6](#) [330RS004NF2807-8](#) [330RS004NF2005-8](#) [330RS004NF2405-8](#)
[330RS004NF2806-8](#) [330RS004NF2406-8](#) [330DS004UC1404-4](#) [330BS004B2405-5L](#) [330RS004NF2805-8](#)