SCAS513E - JUNE 1995 - REVISED OCTOBER 2003

- 2-V to 6-V V<sub>CC</sub> Operation
- Inputs Accept Voltages to 6 V
- Max t<sub>pd</sub> of 7.5 ns at 5 V


#### description/ordering information

These octal buffers and line drivers are designed specifically to improve the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.


The 'AC241 devices are organized as two 4-bit buffers/drivers with separate complementary output-enable (1 $\overline{OE}$  and 2OE) inputs. When 1 $\overline{OE}$  is low or 2OE is high, the device passes noninverted data from the A inputs to the Y outputs. When 1 $\overline{OE}$  is high or 2OE is low, the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor and OE should be tied to GND through a pulldown resistor; the minimum value of the resistor is determined by the current-sinking or the current-sourcing capability of the driver.

SN54AC241 . . . J OR W PACKAGE SN54AC241 . . . DB, DW, N, NS, OR PW PACKAGE (TOP VIEW)



SN54AC241 . . . FK PACKAGE (TOP VIEW)



#### ORDERING INFORMATION

T <sub>A</sub>	PACKAGI	Εt	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube	SN74AC241N	SN74AC241N
-40°C to 85°C	COIC DW	Tube	SN74AC241DW	10044
	SOIC - DW	Tape and reel	SN74AC241DWR	AC241
	SOP - NS	Tape and reel	SN74AC241NSR	AC241
	SSOP – DB	Tape and reel	SN74AC241DBR	AC241
	TOCOD DW	Tube	SN74AC241PW	10044
	TSSOP – PW	Tape and reel	SN74AC241PWR	AC241
	CDIP – J	Tube	SNJ54AC241J	SNJ54AC241J
-55°C to 125°C	CFP – W	Tube	SNJ54AC241W	SNJ54AC241W
	LCCC - FK	Tube	SNJ54AC241FK	SNJ54AC241FK

<sup>&</sup>lt;sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.





#### **FUNCTION TABLES**

INPU	JTS	OUTPUT
1OE	1A	1Y
L	Н	Н
L	L	L
Н	Χ	Z

INP	UTS	OUTPUT
20E	2A	2Y
Н	Н	Н
Н	L	L
L	Χ	Z

### logic diagram (positive logic)





#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		–0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)		. $-0.5$ V to $V_{CC}$ + $0.5$ V
Output voltage range, VO (see Note 1)		. $-0.5$ V to $V_{CC} + 0.5$ V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ )		±20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> )	)	±20 mA
Continuous output current, $I_O(V_O = 0 \text{ to } V_{CC})$		±50 mA
Continuous current through V <sub>CC</sub> or GND		±200 mA
Package thermal impedance, $\theta_{JA}$ (see Note 2):	DB package	70°C/W
	DW package	58°C/W
	N package	69°C/W
	NS package	60°C/W
	PW package	83°C/W
Storage temperature range, T <sub>stg</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.



#### recommended operating conditions (see Note 3)

			SN54A	C241	11 SN74AC241		
			MIN	MAX	MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage		2	6	2	6	V
		V <sub>CC</sub> = 3 V	2.1		2.1		
$V_{IH}$	High-level input voltage	$V_{CC} = 4.5 \text{ V}$	3.15		3.15		V
		V <sub>CC</sub> = 5.5 V	3.85		3.85		
		V <sub>CC</sub> = 3 V		0.9		0.9	
$V_{IL}$	Low-level input voltage	$V_{CC} = 4.5V$		1.35		1.35	V
		$V_{CC} = 5.5 \text{ V}$		1.65		1.65	
VI	Input voltage		0/	V <sub>CC</sub>	0	$V_{CC}$	V
Vo	Output voltage		9	$V_{CC}$	0	$V_{CC}$	V
		V <sub>CC</sub> = 3 V	30	-12		-12	
l <sub>OH</sub>	High-level output current	V <sub>CC</sub> = 4.5 V	Q.	-24		-24	mA
		V <sub>CC</sub> = 5.5 V		-24		-24	
		V <sub>CC</sub> = 3 V		12		12	
$I_{OL}$	Low-level output current	V <sub>CC</sub> = 4.5 V		24		24	mA
		V <sub>CC</sub> = 5.5 V		24		24	
Δt/Δν	Input transition rise or fall rate	·		8		8	ns/V
T <sub>A</sub>	Operating free-air temperature		-55	125	-40	85	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## SN54AC241, SN74AC241 OCTAL BUFFERS/DRIVERS WITH 3-STATE OUTPUTS

SCAS513E - JUNE 1995 - REVISED OCTOBER 2003

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

5.4	DAMETER	TEGT COMPLETIONS		T,	<sub>A</sub> = 25°C	;	SN54A	C241	SN74A	C241	UNIT
PA	ARAMETER	TEST CONDITIONS	v <sub>cc</sub>	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			3 V	2.9			2.9		2.9		
		I <sub>OH</sub> = -50 μA	4.5 V	4.4			4.4		4.4		
			5.5 V	5.4			5.4		5.4		
.,		$I_{OH} = -12 \text{ mA}$	3 V	2.56			2.4	h	2.46		V
V <sub>OH</sub>			4.5 V	3.86			3.7	VIE	3.76		V
		I <sub>OH</sub> = -24 mA	5.5 V	4.86			4.7	PRE	4.76		
		$I_{OH} = -50 \text{ mA}^{\dagger}$	5.5 V				3.85	1 /			
		$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				2		3.85		
			3 V			0.1	30/	0.1		0.1	
		I <sub>OL</sub> = 50 μA	4.5 V			0.1	Q	0.1		0.1	V
			5.5 V			0.1		0.1		0.1	
.,		I <sub>OL</sub> = 12 mA	3 V			0.36		0.5		0.44	
$V_{OL}$			4.5 V			0.36		0.5		0.44	
		I <sub>OL</sub> = 24 mA	5.5 V			0.36		0.5		0.44	
		I <sub>OL</sub> = 50 mA <sup>†</sup>	5.5 V					1.65			
		I <sub>OL</sub> = 75 mA <sup>†</sup>	5.5 V							1.65	
	Data inputs	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5.4			±0.1		±1		±1	•
l <sub>l</sub>	Control inputs	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5 V			±0.1		±1		±1	μΑ
l <sub>OZ</sub>		$V_O = V_{CC}$ or GND, $V_{I(OE)} = V_{IL}$ or $V_{IH}$	5.5 V			±0.25		±5		±2.5	μΑ
I <sub>CC</sub>		$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		80		40	μΑ
C <sub>i</sub>		V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		2.5						pF

 $<sup>^{\</sup>dagger}$  Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	то	T <sub>A</sub> = 25°C			SN54AC241		SN74AC241		UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	ONIT
t <sub>PLH</sub>	•	V	1.5	6	9	1	12	1.5	10	
t <sub>PHL</sub>	Α	Y	1.5	6	9	1,4	11.5	1	10.5	ns
t <sub>PZH</sub>	OE or OE	Υ	1.5	6.5	12.5	1)	13	1	13	
t <sub>PZL</sub>	OE or OE		1.5	7	12	Ž	13	1.5	13	ns
t <sub>PHZ</sub>	OE or OE	V	2	8	12	g 1	13	2	12.5	ns
t <sub>PLZ</sub>	OE OF OE	r	1.5	7	12.5	1	13	1	13.5	

– t<sub>PHZ</sub>

50% V<sub>CC</sub>

**VOLTAGE WAVEFORMS** 

 $V_{OH} - 0.3 V$ 

≈0 V

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

DADAMETED	FROM	ТО	T <sub>A</sub> = 25°C			SN54A	C241	SN74A	C241	
PARAMETER	(INPUT)	(OUTPUT)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
t <sub>PLH</sub>		V	1.5	5	7	1	9.5	1	7.5	
t <sub>PHL</sub>	Α	Y	1.5	4.5	7	1	1 / 9 6	1	7.5	ns
t <sub>PZH</sub>	<del>05</del> 05	,	1.5	5.5	9	1,	10	1	9.5	
t <sub>PZL</sub>	OE or OE	Y	1.5	5.5	9	1)	10	1	9.5	ns
t <sub>PHZ</sub>	OE or OE	V	1.5	6.5	10	700	11.5	1	10.5	no
t <sub>PLZ</sub>	OE OF OE	ſ	1.5	6	10	Q 1	11.5	1	10.5	ns

#### operating characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C

	PARAMETER	TEST CO	TYP	UNIT	
C <sub>pd</sub>	Power dissipation capacitance per buffer/driver	$C_L = 50 \text{ pF},$	f = 1 MHz	45	pF

PARAMETER MEASUREMENT INFORMATION

#### O 2×VCC **TEST** S1 $\mathbf{500}\,\Omega$ t<sub>PLH</sub>/t<sub>PHL</sub> Open **From Output** $2 \times V_{CC}$ **Under Test** t<sub>PLZ</sub>/t<sub>PZL</sub> t<sub>PHZ</sub>/t<sub>PZH</sub> Open $C_L = 50 pF$ **500** Ω (see Note A) Output $v_{cc}$ **LOAD CIRCUIT** Control 50% V<sub>CC</sub> 50% V<sub>CC</sub> (low-level enabling) - t<sub>PLZ</sub> t<sub>PZL</sub> -Vcc Output ≈V<sub>CC</sub> 50% V<sub>CC</sub> Input Waveform 1 50% V<sub>CC</sub> V<sub>OL</sub> + 0.3 V S1 at 2 × V<sub>CC</sub>

NOTES: A.  $C_L$  includes probe and jig capacitance.

50% V<sub>CC</sub>

**VOLTAGE WAVEFORMS** 

t<sub>PLH</sub>

Output

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq$  2.5 ns,  $t_f \leq$  2.5 ns.

(see Note B)

Waveform 2

S1 at Open

(see Note B)

Output

t<sub>PZH</sub> -

D. The outputs are measured one at a time with one input transition per measurement.

**t**PHL

 $50\% \ V_{CC}$ 

 $V_{OH}$ 

VoL

Figure 1. Load Circuit and Voltage Waveforms







10-Dec-2020

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				
SN74AC241DBR	ACTIVE	SSOP	DB	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples
SN74AC241DW	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples
SN74AC241DWR	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples
SN74AC241N	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-40 to 85	SN74AC241N	Samples
SN74AC241NSR	ACTIVE	so	NS	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples
SN74AC241PW	ACTIVE	TSSOP	PW	20	70	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples
SN74AC241PWR	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC241	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



### **PACKAGE OPTION ADDENDUM**

10-Dec-2020

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## PACKAGE MATERIALS INFORMATION

www.ti.com 30-Dec-2020


#### TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AC241DBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74AC241DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74AC241NSR	SO	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1
SN74AC241PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1

www.ti.com 30-Dec-2020

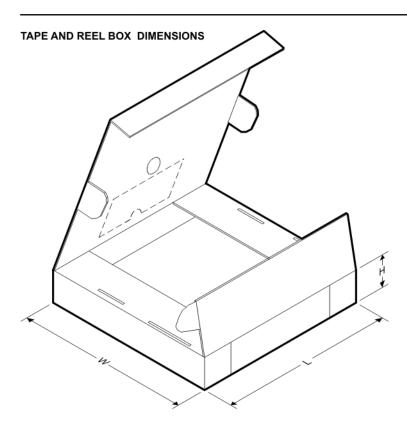

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AC241DBR	SSOP	DB	20	2000	853.0	449.0	35.0
SN74AC241DWR	SOIC	DW	20	2000	367.0	367.0	45.0
SN74AC241NSR	SO	NS	20	2000	367.0	367.0	45.0
SN74AC241PWR	TSSOP	PW	20	2000	853.0	449.0	35.0



SMALL OUTLINE PACKAGE



- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.



SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### **MECHANICAL DATA**

## NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



PW (R-PDSO-G20)

### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



# PW (R-PDSO-G20)

## PLASTIC SMALL OUTLINE



- All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
  C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SOIC



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

Tl's products are provided subject to Tl's Terms of Sale (<a href="www.ti.com/legal/termsofsale.html">www.ti.com/legal/termsofsale.html</a>) or other applicable terms available either on ti.com or provided in conjunction with such Tl products. Tl's provision of these resources does not expand or otherwise alter Tl's applicable warranties or warranty disclaimers for Tl products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated