





- Universal AC input I Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit I Over current I Over voltage I Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 I IP65 design for indoor or outdoor installations
- Three in one dimming function (1-10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry I damp I wetlocations
- Type "HL" for use in class I, Division 2 hazardous(Classified) location luminaires
- 7 years warranty (Note.10)

























HLG-150H-12 A Blank: IP67 rated. Cable for IIO connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1-10Vdc or 10V PWM signal or resistance.

## **SPECIFICATION**

MODEL		HLG-150H-12	HLG-150H-15	HLG-150H-20	HLG-150H-24	HLG-150H-30	HLG-150H-36	HLG-150H-42	HLG-150H-48	HLG-150H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4	6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT	12.5A	10A	7.5A	6.3A	5A	4.2A	3.6A	3.2A	2.8A			
	RATED POWER	150W	150W	150W	151.2W	150W	151.2W	151.2W	153.6W	151.2W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
OUTPUT		Can be adjusted by internal potentiometer A type only											
	CURRENT ADJ. RANGE	7.5 ~ 12.5A	6 ~ 10A	4.5 ~ 7.5A	3.8 ~ 6.3A	3 ~ 5A	2.5 ~ 4.2A	2.16 ~ 3.6A	1.92 ~ 3.2A	1.68 ~ 2.8A			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
		1000ms,50ms		1	1	nd ; B type 1000	1	1	s,200ms/230VA				
	HOLD UP TIME (Typ.)	16ms at full lo			77710 411411100	iu / 5 i j po 1000			3,2001113/20017	10 41 70 70 104			
	VOLTAGE RANGE Note.5	90 ~ 305VAC											
	FREQUENCY RANGE												
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	TOTAL HARMONIC DISTORTION	THD< 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input											
	EFFICIENCY (Typ.)	91.5%											
INPUT	AC CURRENT (Typ.)	1.7A / 115VA			0.7A / 277VAC		73.370	7470	7470	7470			
	INRUSH CURRENT (Typ.)	1.7A / 115VAC 0.75A / 230VAC 0.7A / 277VAC  COLD START 65A(twidth=425µs measured at 50% Ipeak) at 230VAC											
	MAX. No. of PSUs on 16A	OCE OTHER OWN (I MURIT TEOPS I INCUSUROU AT 5070 I IPERKY AT 2004/10											
	CIRCUIT BREAKER	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC											
	LEAKAGE CURRENT	<0.75mA/277VAC											
	OVER CURRENT	95 ~ 108%											
	OVER CORRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PRUTECTION	OVER VOLTAGE	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V			
	OVER VOLTAGE	Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
	OVER TEMPERATURE	Shut down o/	p voltage, recov	vers automatica	ally after tempe	erature goes do	wn						
	WORKING TEMP.	-40 ~ +70 °C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH	non-condensin	ng									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,	10 ~ 95% RH										
	TEMP. COEFFICIENT	±0.03%/℃(	(0 ~ 50°C)										
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
		UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved;											
	SAFETY STANDARDS Note.7	design refer to UL60950-1, TUV EN60950-1											
SAFETY &	WITHSTAND VOLTAGE	•	KVAC I/P-F0			С							
EMC	ISOLATION RESISTANCE		G, O/P-FG:10										
	EMC EMISSION	-	•				ass C (≥ 60%	load) : FN6100	0-3-3				
	EMC IMMUNITY	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥ 60% load) ; EN61000-3-3  Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF	192.2K hrs m		3K-217F (25°C)		ooz i, iigiit ilida	on y level (surg	ov/, cintone					
OTHERS	DIMENSION	228*68*38.8n											
UIHERS			s/14.8Kg/0.8Cl	IET									
	PACKING	0 1	5/14.8Kg/0.8Cl			10500 /	11						

#### NOTE


- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

  3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. A type only.
  7. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ONIOFF the power supply may lead to increase of the set up time.


  9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  | File Name: HI G. 150 H. SPEC 2015.07 File Name: HL G-150H-SPEC 2015-07-2
- 10. Refer to warranty statement. 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains



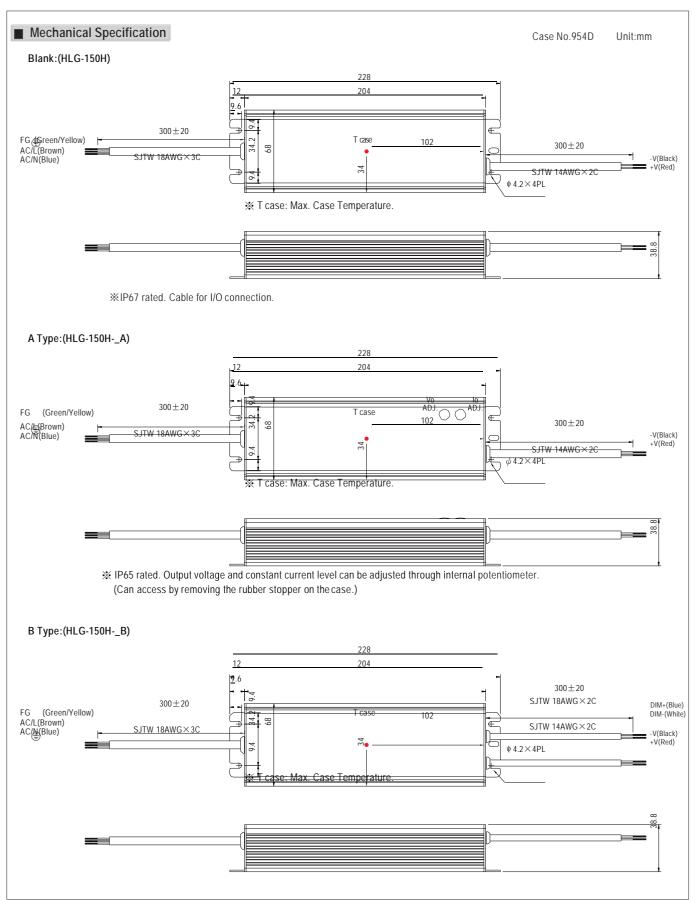




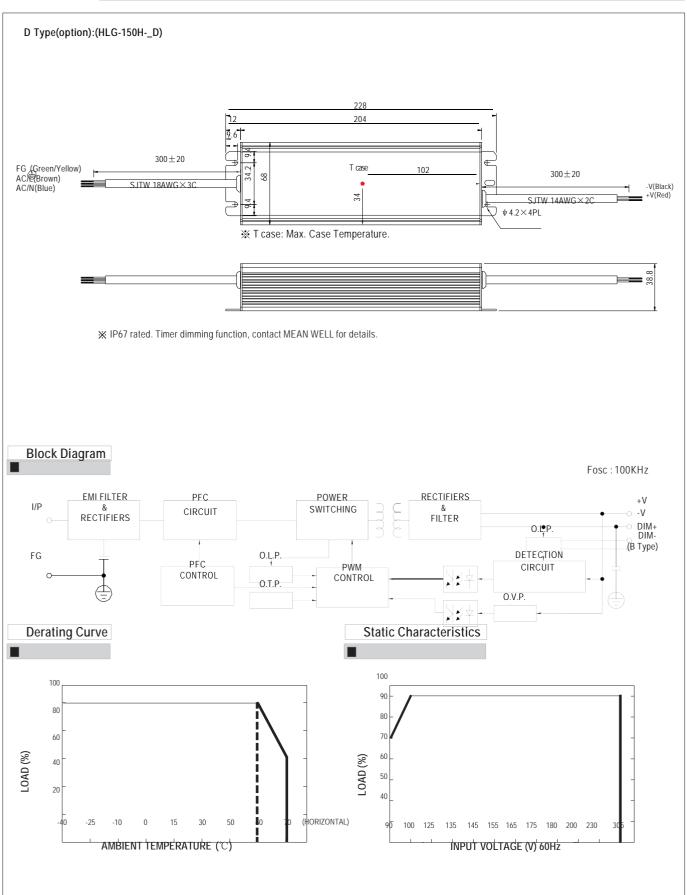




# ■ Power Factor Characteristic

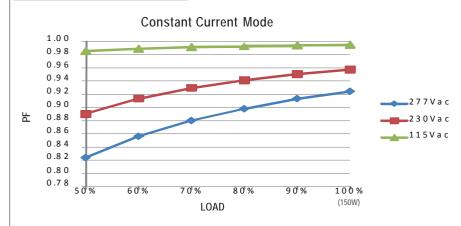

## **EFFICIENCY vs LOAD (48V Model)**

HLG-150H series possess superior working efficiency that up to 94% can be reached in field applications.

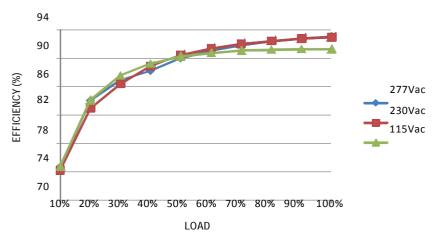


## DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

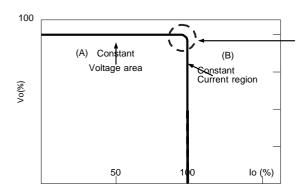

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEANWELL.



# ■ DIMMING OPERATION (for B-type only)



- ★ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- → Please DO NOT connect "DIM-" to "-V".
- \* Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90K Ω	100K $\Omega$	OPEN
	Multiple drivers (N=driverquantityforsynchronized dimming operation)	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω /N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

#### \*1~10V dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


## \* 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- \*\*Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- \*Direct connecting to LEDs is suggested, but is not suitable for using additional

drivers. Dimming connection diagram for turning the lighting fixture ON/OFF:


## N FG I

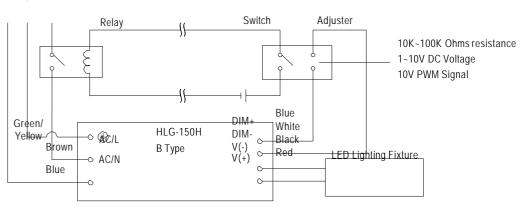

Using a switch and relay can turn ON/OFF the lighting fixture.

- $1. Output \ constant \ current \ level \ can \ be \ adjusted \ through \ output \ cable \ by \ connecting \ a \ resistance \ or \ 1 \sim 10V dc \ or \ 10V \ PWM \ signal \ between \ DIM+ \ and \ DIM-.$
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



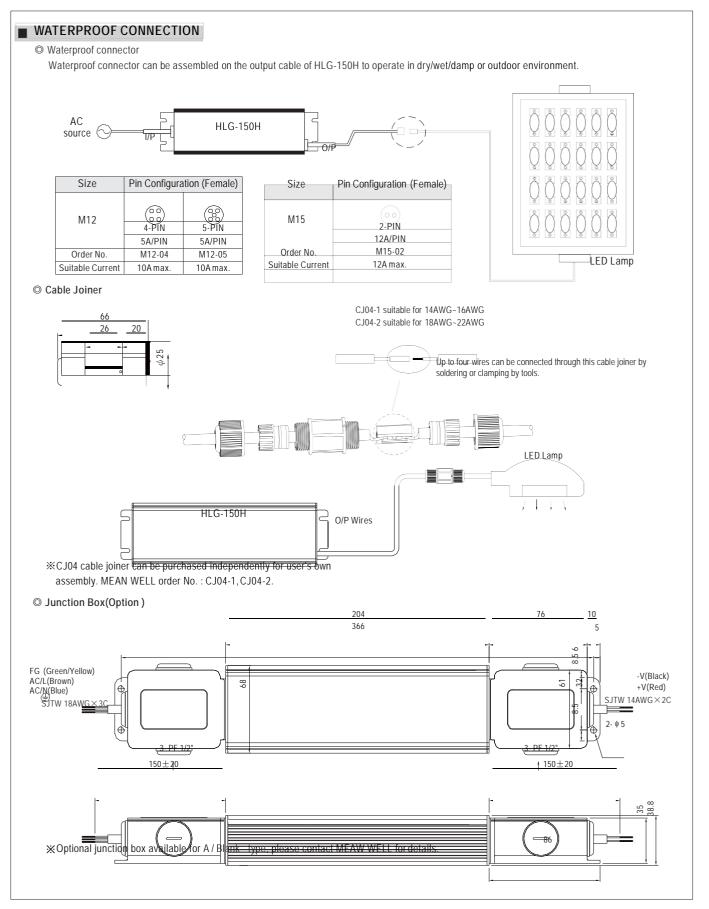





RS Part Number	Mean Well Part Number	RS Part Number	Mean Well Part Number
7211904	HLG-150H-12B	7382387	HLG-150H-12A
7211907	HLG-150H-15B	7382380	HLG-150H-15A
7211910	HLG-150H-24B	7382393	HLG-150H-24A
7211913	HLG-150H-30B	7382396	HLG-150H-30A
7211917	HLG-150H-36B	7382390	HLG-150H-36A
7211929	HLG-150H-48B	7382403	HLG-150H-48A