
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

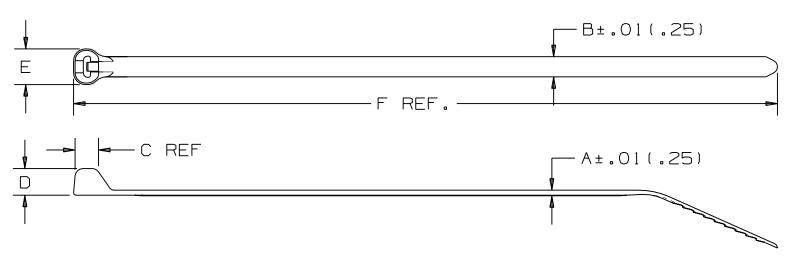

PANDUIT PART NO.	BUNDLI MIN. (mm)	in	A in (mm)	B in (mm)	C in (mm)	in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs.	CROSS SECTION	WEIGHT  bs./100 pcs.
BTIM	.06 (1.5)	0.90 (23)	.036 (0.9)	.095 (2.4)	.110 (2.8)	.156 (4.0)	.172 (4.4)	4.0 (102)	18 (80)	MINIATURE	.05 (22)
BT1.5M	.06	1.5	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182	6.3 (160)	18 (80)	MINIATURE	.09 (43)
ВТ2М	.06	2.0 (51)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182	7.9 (201)	18 (80)	MINIATURE	.12 (53)
BT4M	.06	4.00 (102)	.046	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182	14.2 (361)	18 (80)	MINIATURE	.21 (93)

											DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS			
										CORP. TINLEY PARK, ILLINOIS				
										DOME-TOP Barb Ty CABLE TIES				
										BT SERÏES				
										DIMENSIONAL TOLERANCES ARE:  (.X) ±.10(2.5)(.XXX) ± .020(.51)		UNLESS OTHERWISE SPECIFIED,		
												ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
										DRAWN BY PMH	MAT'L:	scale NONE		
10	5/2/06	JABO		REMOVED STRAIGHT TIP REFERENCE & TIP STYLE COLUMN	0037	10				6-24-93	NYLON 6.6	DRAWING NO.  BT - 0037		
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN -	R	CUST	SUP		JAL CHK.D		SHEET 1 OF 3		

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panduit:

<u>BT1.5M-C</u> <u>BT4M-M0</u> <u>BT1M-M0</u> <u>BT2M-M</u> <u>BT1.5M-M30</u> <u>BT1M-M1</u> <u>BT1M-M10</u> <u>BT1M-M2</u> <u>BT1M-M30</u> <u>BT1</u>