

Illuminated Tactile Switches

B3W-9

Compact Illuminated Through-hole-mounting Switches with Two LEDs

- Compact construction 10 × 10 × 11 mm (W × D × H) and 12 × 12 × 11 mm (W × D × H) with bright and uniform illumination.
- Three-color illumination (red LED + green LED = orange).
- Standard force (1.57 N) and high-force (2.26 N) models.







■ List of Models

$10 \times 10 \text{ mm Models}$

Operation type	Contact		Operating force	LED color	No. of	Cap color	Вох	
	material		(OF)		LEDs		Model	Minimum packing unit
				Blue	1	Blue	B3W-9000-B1B	
					1	Transparent	B3W-9000-B1C	
					1	Milky white	B3W-9000-B1N	
					2	Blue	B3W-9000-B2B	
					2	Transparent	B3W-9000-B2C	
					2	Milky white	B3W-9000-B2N	
				Green	1	Transparent	B3W-9000-G1C	
					1	Green	B3W-9000-G1G	
					1	Milky white	B3W-9000-G1N	
					2	Transparent	B3W-9000-G2C	
					2	Green	B3W-9000-G2G	
					2	Milky white	B3W-9000-G2N	
				Green (high	1	Transparent	B3W-9000-HG1C	
				brightness)	1	Green	B3W-9000-HG1G	300 pcs
	Silver plated	lated 11 mm			1	Milky white	B3W-9000-HG1N	
					2	Transparent	B3W-9000-HG2C	
B3W-9000 Series:			1.57 N {160 gf}		2	Green	B3W-9000-HG2G	
Standard force			max.		2	Milky white	B3W-9000-HG2N	
				Red	1	Transparent	B3W-9000-R1C	
					1	Milky white	B3W-9000-R1N	
					1	Red	B3W-9000-R1R	
					2	Transparent	B3W-9000-R2C	
					2	Milky white	B3W-9000-R2N	
					2	Red	B3W-9000-R2R	
				Red + Green Red + High bright green	2	Transparent	B3W-9000-RG2C	
					2	Milky white	B3W-9000-RG2N	
					2	Transparent	B3W-9000-RHG2C	
				Red + Blue	2	Transparent	B3W-9000-RB2C	
				Yellow	1	Transparent	B3W-9000-Y1C	
					1	Milky white	B3W-9000-Y1N	
				-	1	Yellow	B3W-9000-Y1Y	
					2	Transparent	B3W-9000-Y2C	
					2	Milky white	B3W-9000-Y2N	
				2	Yellow	B3W-9000-Y2Y]	

Operation type	Contact		Operating force	LED color	No. of	Cap color	Box	
	material			LEDs		Model	Minimum packing unit	
				Blue	1	Blue	B3W-9002-B1B	
					1	Transparent	B3W-9002-B1C	
					1	Milky white	B3W-9002-B1N	
					2	Blue	B3W-9002-B2B	
					2	Transparent	B3W-9002-B2C	
					2	Milky white	B3W-9002-B2N	
				Green	1	Transparent	B3W-9002-G1C	
					1	Green	B3W-9002-G1G	
					1	Milky white	B3W-9002-G1N	
					2	Transparent	B3W-9002-G2C	
					2	Green	B3W-9002-G2G	
					2	Milky white	B3W-9002-G2N	
				Green	1	Transparent	B3W-9002-HG1C	
				(high bright- ness)	1	Green	B3W-9002-HG1G	
				11033)	1	Milky white	B3W-9002-HG1N	
					2	Transparent	B3W-9002-HG2C	
DOM 0000 0 :			0.00.11.000.0		2	Green	B3W-9002-HG2G	
B3W-9002 Series: High force	Silver plated	11 mm	2.26 N {230 gf} max.		2	Milky white	B3W-9002-HG2N	300 pcs
· ·				Red	1	Transparent	B3W-9002-R1C	
					1	Milky white	B3W-9002-R1N	
					1	Red	B3W-9002-R1R	
					2	Transparent	B3W-9002-R2C	
					2	Milky white	B3W-9002-R2N	
					2	Red	B3W-9002-R2R	
				Red + Green	2	Transparent	B3W-9002-RG2C	
					2	Milky white	B3W-9002-RG2N	
				Red + High bright green	2	Transparent	B3W-9002-RHG2C	
				Red + Blue	2	Transparent	B3W-9002-RB2C	
				Yellow	1	Transparent	B3W-9002-Y1C	
					1	Milky white	B3W-9002-Y1N	
					1	Yellow	B3W-9002-Y1Y	
					2	Transparent	B3W-9002-Y2C	1
					2	Milky white	B3W-9002-Y2N	1
					2	Yellow	B3W-9002-Y2Y	

$\textbf{12} \times \textbf{12} \text{ mm Models}$

Operation type	Contact material		Operating force	LED color	No. of LEDs	Cap color	Вох	
			(OF)				Model	Minimum packing unit
				Blue (high brightness)	1	Blue	B3W-9010-B1B	
				brightness)	1	Milky white	B3W-9010-B1N	_
					2	Blue	B3W-9010-B2B	
					2	Milky white	B3W-9010-B2N	-
				Green	1	Green	B3W-9010-G1G	
					1	Milky white	B3W-9010-G1N	-
					2	Green	B3W-9010-G2G	
					2	Milky white	B3W-9010-G2N	
				Green (high brightness)	1	Green	B3W-9010-HG1G	-
				brightness)	1	Milky white	B3W-9010-HG1N	-
					2	Green	B3W-9010-HG2G	-
B3W-9010 Series: Standard force			1.57 N {160 gf} max.		2	Milky white	B3W-9010-HG2N	-
Standard force			max.	Red	1	Red	B3W-9010-R1R	-
					1	Milky white	B3W-9010-R1N	
					2	Red	B3W-9010-R2R	
					2	Milky white	B3W-9010-R2N	-
				Red + Green	2	Milky white	B3W-9010-RG2N	
				Red + High bright green	2	Milky white	B3W-9010-RHG2N	300 pcs
				Red + Blue	2	Milky white	B3W-9010-RB2N	
				Yellow	1	Yellow	B3W-9010-Y1Y	
					1	Milky white	B3W-9010-Y1N	
					2	Yellow	B3W-9010-Y2Y	
		ver plated 11 mm			2	Milky white	B3W-9010-Y2N	
	Silver plated		2.26 N {230 gf}	Blue	1	Blue	B3W-9012-B1B	
					1	Milky white	B3W-9012-B1N	
					2	Blue	B3W-9012-B2B	
					2	Milky white	B3W-9012-B2N	
				Green	1	Green	B3W-9012-G1G	
					1	Milky white	B3W-9012-G1N	
					2	Green	B3W-9012-G2G	
					2	Milky white	B3W-9012-G2N	
				Green	1	Green	B3W-9012-HG1G	
				(high bright-	1	Milky white	B3W-9012-HG1N	
				ness)	2	Green	B3W-9012-HG2G	
B3W-9012 Series:					2	Milky white	B3W-9012-HG2N	
High-force			max.	Red	1	Red	B3W-9012-R1R	
					1	Milky white	B3W-9012-R1N	
				2	Red	B3W-9012-R2R	_	
					2	Milky white	B3W-9012-R2N	
			Red + Green	2	Milky white	B3W-9012-RG2N		
				Red + High bright green	2	Milky white	B3W-9012-RHG2N	
				Red + Blue	2	Milky white	B3W-9012-RB2N	
				Yellow	1	Yellow	B3W-9012-Y1Y	
					1	Milky white	B3W-9012-Y1N	
					2	Yellow	B3W-9012-Y2Y	
					2	Milky white	B3W-9012-Y2N	


■ Ratings/Characteristics (Same for Both Standard and High-force Switches)

Rating (resistive load)	1 to 50 mA, 3 to 24 VDC
Minimum applicable load (reference value)	10 μA at 1 VDC (resistive load)
Ambient operating temperature	-25°C to +70°C at 60% max. humidity (with no icing or condensation)
Ambient operating humidity	35% to 85% (at +5 to +35°C)
Contact form	SPST-NO
Contact resistance (initial value)	100 m Ω max.
Insulation resistance	100 M Ω min. (at 250 VDC with insulation tester)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s 2 {approx. 100 G} max. Malfunction: 100 m/s 2 {approx. 10 G} max.
Durability	Switch sec- tion 1.57 N (standard force):1,000,000 operations min. 2.26 N (high-force):300,000 operations min.
Degree of protection	IEC IP00
Washing	Not possible

■ Operating Characteristics

Item	Standard-force Switches (B3W-90□0)	High-force Switches (B3W-90□2)
Operating force (OF)	1.57 N {160 gf} max.	2.26 N {230 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm	

■ Model Structure



■ LED Specifications


(Ambient temperature Ta = 25°C)

LED color	Red	Green	Green (high brightness)	Yellow	Blue
Maximum operating current I _{FM}	27 mA	27 mA	27 mA	45 mA	27 mA
Recommended operating current I _F	20 mA	10 mA	20 mA	20 mA	20 mA
Forward voltage (standard value) V _F	1.8 V	2.1 V	3.7 V	2 V	3.7 V
Maximum reverse voltage V _R	5 V	5 V	5 V	5 V	5 V
Ambient operating temperature	−25°C to 70°C				


Note: For Switches with two LEDs, red and green, the recommended operating current is 12 mA for the red and 20 mA for the green LED for application with three-color illumination.


■ LEDs


• Forward current reduction curve



• Forward current and forward voltage curves








Note: 1. Make sure that the polarity of the LEDs is correct. The polarity is not indicated on the Switch, but the positive pole is located on the back surface of the Switch on the side with the OMRON mark.


2. Connect limiting resistors to the LEDs. The Switch does not have built-in limiting resistors, so satisfy the LED characteristics by obtaining the limiting resistance according to the following formula based on the voltage to be used.


■ **Dimensions** (Unit: mm)


1 LED Types



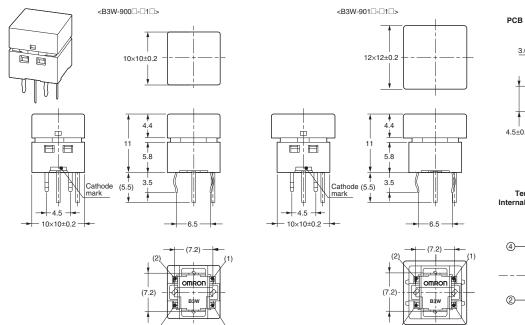








Note: If the poles of the LED are set incorrectly, it may result in malfunction.

2 LED Types



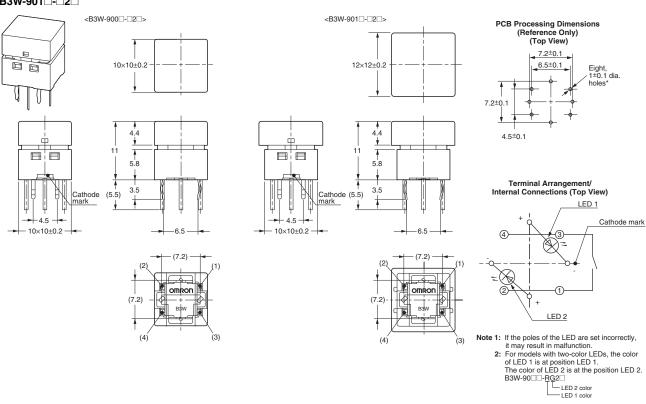

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions. No terminal numbers are indicated on the Switches.

■ Accessories

B3W-9□□-**F**□

Text Combination Films

Text Combination Films for B3W-9 Illuminated Tactile Switches

- Display two different labels in combination with a 2-LED B3W-9 Switch.
- Color combinations: Red/Green or Red/Blue



■ Model Number Legend

$$\mathbf{B3W-9} \underline{\square}_{1\ 2} \mathbf{-} \underline{\mathbf{F}} \underline{\square}_{3}$$

- 1. Color
 - R: Red
- 2. Color
 - B: Blue
 - G: Green
- 3. Color and text combination

F1: Red OFF Blue or green ON

F2: Red 切 (OFF) Blue or green 入 (ON)

F3: Red 閉 (CLOSE) Blue or green 閉 (OPEN)

F4: Red ×

Blue or green ○
F5: Red

Blue or green

Note: 1. Five text combinations are available.

Films can also be customized with other text for 50 sheets (1,250 films) per lot. Delivery time is approximately five weeks. (Ask your OMRON representative for details.)

Text Combinations	LED colors	Model	
"OFF" and "ON"	Red/Blue	B3W-9RB-F1	
	Red/Green	B3W-9RG-F1	
"切" and "入"	Red/Blue	B3W-9RB-F2	
(OFF) (ON)	Red/Green	B3W-9RG-F2	
"閉" and "開"	Red/Blue	B3W-9RB-F3	
(CLOSE)(OPEN)	Red/Green	B3W-9RG-F3	
" \times " and " \bigcirc "	Red/Blue	B3W-9RB-F4	
	Red/Green	B3W-9RG-F4	
"▼" and "▲"	Red/Blue	B3W-9RB-F5	
	Red/Green	B3W-9RG-F5	

■ Recommended B3W-9 Switches

Operating force	2-LED Switches	Red/Blue	Red/Bright green
Standard-force Switches		B3W-9000-RB2C	B3W-9000-RHG2C
High-force Switches		B3W-9002-RB2C	B3W-9002-RHG2C

■ Minimum Order

25 films/sheet

B3W-9 Films are sold in units of 25 films. Orders must be made in multiples of 25 (the quantity per sheet).

Note: Text Combination Films are sold without the Switches. Order one of the above models of B3W-9 Illuminated Tactile Switches separately.

■ Safety Precautions

Note: Refer to Safety Precautions in Tactile Switches (Cat. No. X037) for details on general safety precautions.


■ Precautions for Correct Use

LEDs

Switches with high-brightness green (HG) or blue (B) LEDs are susceptible to static electricity. Be careful when handling a Switch with these LEDs as it may cause the Switch to breakdown.


Removing the Cap

- Hold the cap at the side away from the mating section. Pull straight up.
- Do not remove the cap while the Switch is mounted. Doing so will apply force to the soldered section and LEDs, resulting in malfunction.



Placing the Cap on the Switch

Hold the Cap at the side away from the mating section. Push straight down until the mating section meets.




Removing the Cap

The Cap can be removed up to two times. Excessively removing the Cap will cause the mating section to become weak, resulting the operating section not mating completely or the Cap may fall off

Film Dimensions

Dimensions of the film are shown below. The thickness is 0.2 mm.



Contact: www.omron.com/ecb

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Cat. No. A167-E1-08 0915(0207)(O)

Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
 Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.