Features

- 3.0V to 5.5V Operation
- Industry-standard Architecture
 - Emulates Many 20-pin PALs®
 - Low-cost Easy-to-use Software Tools
- High-speed
 - 10 ns Maximum Pin-to-pin Delay
- Ultra-low Power
 - 5 μA (Max) Pin-controlled Power-down Mode Option
 - Typical 100 nA Standby
- CMOS and TTL Compatible Inputs and Outputs
 - I/O Pin-keeper Circuits
- Advanced Flash Technology
 - Reprogrammable
 - 100% Tested
- High-reliability CMOS Process
 - 20 Year Data Retention
 - 100 Erase/Write Cycles
 - 2,000V ESD Protection
 - 200 mA Latchup Immunity
- Commercial and Industrial Temperature Ranges
- Dual-in-line and Surface Mount Packages in Standard Pinouts
- Inputs are 5V Tolerant
- Green Package Options (Pb/Halide-free/RoHS Compliant) Available


Description

The ATF16LV8C is a high-performance EECMOS programmable logic device that utilizes Atmel's proven electrically-erasable Flash memory technology. Speeds down to 10 ns and a 5 μA pin-controlled power-down mode option are offered. All speed (continued)


Pin Configurations

All Pinouts Top View


| | <u>'</u> |
|----------|--------------------------------|
| Pin Name | Function |
| CLK | Clock |
| 1 | Logic Inputs |
| I/O | Bi-directional Buffers |
| OE | Output Enable |
| VCC | (+3V to 5.5V) Supply |
| PD | Programmable Power-down Option |



TSSOP



DIP/SOIC







Highperformance EE PLD

ATF16LV8C

Rev. 0403H-06/06




ranges are specified over the full 3.0V to 5.25V range for industrial and commercial temperature ranges.

The ATF16LV8C incorporates a superset of the generic architectures, which allows direct replacement of the 16R8 family and most 20-pin combinatorial PLDs. Eight outputs are each allocated eight product terms. Three different modes of operation, configured automatically with software, allow highly complex logic functions to be realized.

The ATF16LV8C can significantly reduce total system power, thereby enhancing system reliability and reducing power supply costs. When pin 4 is configured as the power-down control pin, supply current drops to less than 5 μ A whenever the pin is high. If the power-down feature isn't required for a particular application, pin 4 may be used as a logic input. Also, the pin keeper circuits eliminate the need for internal pull-up resistors along with their attendant power consumption.

Block Diagram

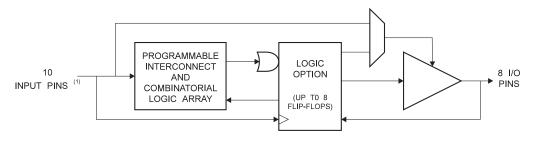

Note: 1. Includes optional PD control pin.

Absolute Maximum Ratings*

| Temperature Under Bias40°C to +85°C | |
|--|--|
| Storage Temperature65°C to +150°C | |
| Voltage on Any Pin with Respect to Ground2.0V to +7.0V ⁽¹⁾ | |
| Voltage on Input Pins with Respect to Ground During Programming2.0V to +14.0V ⁽¹⁾ | |
| Programming Voltage with Respect to Ground2.0V to +14.0V ⁽¹⁾ | |

*NOTICE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note:

Minimum voltage is -0.6V DC, which may undershoot to -2.0V for pulses of less than 20 ns.
 Maximum output pin voltage is Vcc + 0.75V DC, which may overshoot to 7.0V for pulses of less than 20 ns.

DC and AC Operating Conditions

| | Commercial |
|---------------------------------|--------------|
| Operating Temperature (Ambient) | 0°C - 70°C |
| V _{CC} Power Supply | 3.0V to 5.5V |


DC Characteristics

| Symbol | Parameter | Condition ⁽²⁾ | Min | Тур | Max | Units |
|---------------------------------|---------------------------------------|---|------|--------------|---------------------|-------|
| I _{IL} | Input or I/O Low Leakage Current | $0 \le V_{IN} \le V_{IL}(Max)$ | | | -10 | μΑ |
| I _{IH} | Input or I/O High Leakage Current | $1.8 \le V_{IN} \le V_{CC}$ | | | 10 | μΑ |
| I _{CC1} ⁽¹⁾ | Power Supply Current | 15 MHz, $V_{CC} = Max$, $V_{IN} = 0$, V_{CC} , Outputs Open | | Com. Ind. | 55 60 | mA |
| I _{PD} ⁽¹⁾ | Power Supply Current, Power-down Mode | $V_{CC} = Max,$ $V_{IN} = 0, V_{CC}$ | | 0.1 | 5 | μΑ |
| I _{OS} | Output Short Circuit Current | V _{OUT} = 0.5V; V _{CC} = 3V; T _A = 25°C | | | -150 | mA |
| V_{IL} | Input Low Voltage | MIN < V _{CC} < Max | -0.5 | | 8.0 | V |
| V_{IH} | Input High Voltage | | 2.0 | | V _{CC} + 1 | V |
| V _{OL} | Output Low Voltage | V _{CC} = Min; All Outputs I _{OL} = 8 mA | | | 0.5 | V |
| V _{OH} | Output High Voltage | V _{CC} = Min I _{OH} = -4 mA | 2.4 | | | V |
| I _{OL} | Output Low Current | V _{CC} = Min | 8 | | | mA |
| I _{OH} | Output High Current | V _{CC} = Min | -4 | | | mA |

Note: 1. All I_{CC} parameters measured with outputs open.

2. For DC characteristics, the test condition of V_{CC} = Max corresponds to 3.6V.

AC Waveforms⁽¹⁾

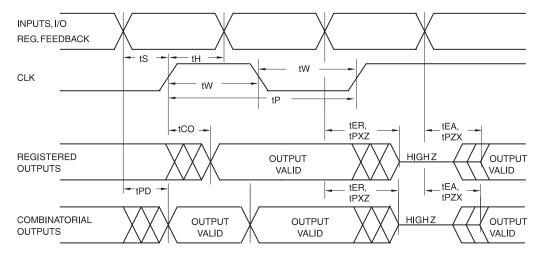

Note: 1. Timing measurement reference is 1.5V. Input AC driving levels are 0.0V and 3.0V, unless otherwise specified.





AC Characteristics

| | | - | 10 | - | 15 | |
|------------------|---|-----|------|-----|------|-------|
| Symbol | Parameter | Min | Max | Min | Max | Units |
| t _{PD} | Input or Feedback to Non-Registered Output | 1 | 10 | 1 | 15 | ns |
| t _{CF} | Clock to Feedback | | 5 | | 8 | ns |
| t _{CO} | Clock to Output | 2 | 7 | 2 | 10 | ns |
| t _S | Input or Feedback Setup Time | 7 | | 12 | | ns |
| t _H | Input Hold Time | 0 | | 0 | | ns |
| t _P | Clock Period | 12 | | 16 | | ns |
| t _W | Clock Width | 6 | | 8 | | ns |
| | External Feedback 1/(t _S + t _{CO}) | | 71.4 | | 45.5 | MHz |
| f_{MAX} | Internal Feedback 1/(t _S + t _{CF}) | | 83.3 | | 50 | MHz |
| | No Feedback 1/(t _P) | | 83.3 | | 62.5 | MHz |
| t _{EA} | Input to Output Enable — Product Term | 3 | 10 | 3 | 15 | ns |
| t _{ER} | Input to Output Disable — Product Term | 2 | 10 | 2 | 15 | ns |
| t _{PZX} | OE pin to Output Enable | 2 | 8 | 2 | 15 | ns |
| t _{PXZ} | OE pin to Output Disable | 1.5 | 8 | 1.5 | 15 | ns |

Power-down AC Characteristics(1)(2)(3)


| | | -10 | | -15 | | |
|-------------------|--------------------------------|-----|-----|-----|-----|-------|
| Symbol | Parameter | Min | Max | Min | Max | Units |
| t _{IVDH} | Valid Input before PD High | 10 | | 15 | | ns |
| t _{GVDH} | Valid OE before PD High | 0 | | 0 | | ns |
| t _{CVDH} | Valid Clock before PD High | 0 | | 0 | | ns |
| t _{DHIX} | Input Don't Care after PD High | | 10 | | 15 | ns |
| t _{DHGX} | OE Don't Care after PD High | | 10 | | 15 | ns |
| t _{DHCX} | Clock Don't Care after PD High | | 10 | | 15 | ns |
| t _{DLIV} | PD Low to Valid Input | | 10 | | 15 | ns |
| t _{DLGV} | PD Low to Valid OE | | 25 | | 30 | ns |
| t _{DLCV} | PD Low to Valid Clock | | 25 | | 30 | ns |
| t _{DLOV} | PD Low to Valid Output | | 30 | | 35 | ns |

Notes: 1. Output data is latched and held.

2. High-Z outputs remain High-Z.


3. Clock and input transitions are ignored.

Input Test Waveforms and Measurement Levels:



 $t_{\rm R},\,t_{\rm F}<1.5{\rm ns}\;(10\%\;{\rm to}\;90\%)$

Output Test Loads: Commercial



Note:

Similar devices are tested with slightly different loads. These load differences may affect output signals' delay and slew rate. Atmel devices are tested with sufficient margins to meet compatible devices.

Pin Capacitance

 $(f = 1 \text{ MHz}, T = 25^{\circ}\text{C})^{(1)}$

| | Тур | Max | Units | Conditions |
|------------------|-----|-----|-------|-----------------------|
| C _{IN} | 5 | 8 | pF | $V_{IN} = 0V$ |
| C _{OUT} | 6 | 8 | pF | V _{OUT} = 0V |


Note: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.

Power-up Reset

The ATF16LV8C's registers are designed to reset during power-up. At a point delayed slightly from $V_{\rm CC}$ crossing $V_{\rm RST}$, all registers will be reset to the low state. As a result, the registered output state will always be high on power-up.

This feature is critical for state machine initialization. However, due to the asynchronous nature of reset and the uncertainty of how $V_{\rm CC}$ actually rises in the system, the following conditions are required:


- 1. The V_{CC} rise must be monotonic from below 0.7V.
- 2. The signals from which the clock is derived must remain stable during $T_{\rm PR}$.
- After T_{PR}, all input and feedback setup times must be met before driving the clock term high.





| Parameter | Description | Тур | Max | Units |
|------------------|------------------------------|-----|-------|-------|
| T _{PR} | Power-up Reset Time | 600 | 1,000 | ns |
| V _{RST} | Power-up Reset Voltage | 2.5 | 3.0 | V |







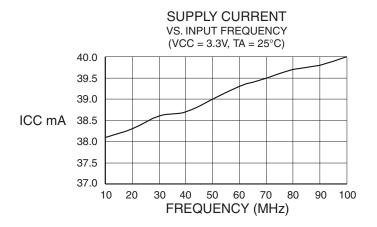


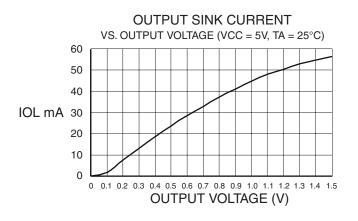

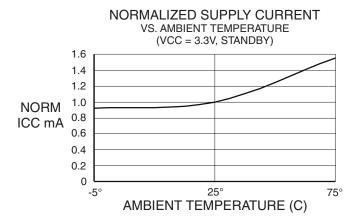


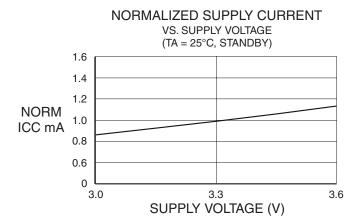


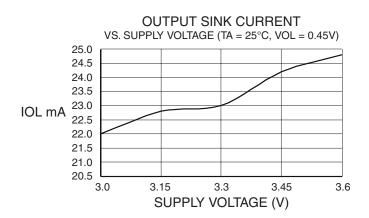


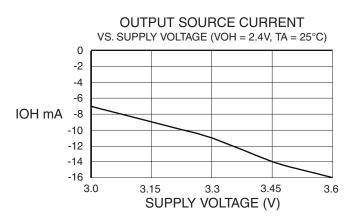



ATF16LV8C

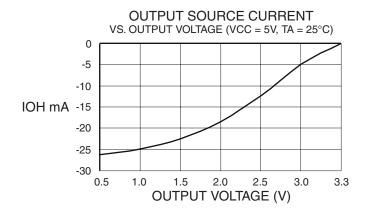


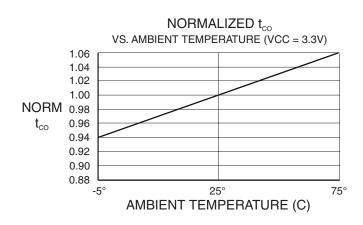

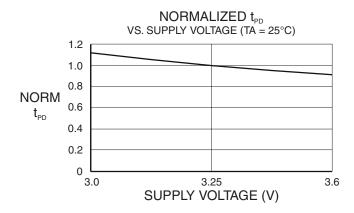

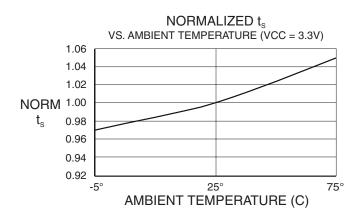


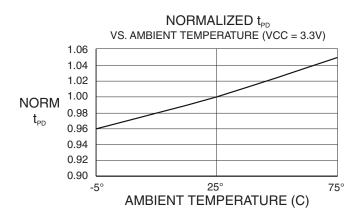


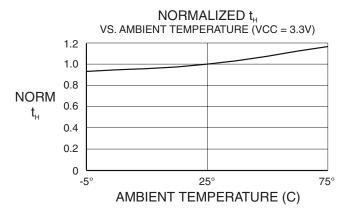








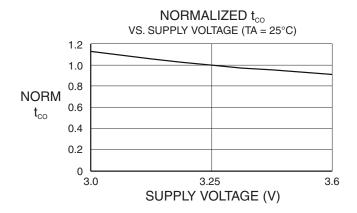

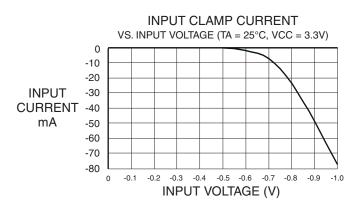

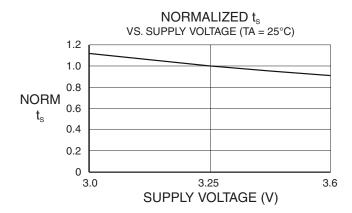

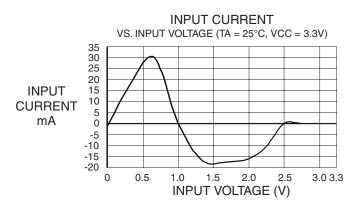



Ordering Information

| t _{PD} (ns) | t _S (ns) | t _{co} (ns) | Ordering Code | Package | Operation Range |
|-------------------------|------------------------|-------------------------|----------------|---------|-----------------|
| 10 | 7 | 7 | ATF16LV8C-10JC | 20J | Commercial |
| | | | ATF16LV8C-10PC | 20P3 | (0°C to 70°C) |
| | | | ATF16LV8C-10SC | 20S | |
| | | | ATF16LV8C-10XC | 20X | |
| 15 | 12 | 10 | ATF16LV8C-15JC | 20J | Commercial |
| | | | ATF16LV8C-15PC | 20P3 | (0°C to 70°C) |
| | | | ATF16LV8C-15SC | 20S | |
| | | | ATF16LV8C-15XC | 20X | |
| 10 | 7 | 7 | ATF16LV8C-10JI | 20J | Industrial |
| | | | ATF16LV8C-10PI | 20P3 | (-40°C to 85°C) |
| | | | ATF16LV8C-10SI | 20S | |
| | | | ATF16LV8C-10XI | 20X | |
| 15 | 12 | 10 | ATF16LV8C-15JI | 20J | Industrial |
| | | | ATF16LV8C-15PI | 20P3 | (-40°C to 85°C) |
| | | | ATF16LV8C-15SI | 20S | |
| | | | ATF16LV8C-15XI | 20X | |

Green Package Options (Pb/Halide-free/RoHS Compliant)

| t _{PD} (ns) | t _s (ns) | t _{co} (ns) | Ordering Code | Package | Operation Range |
|-------------------------|------------------------|-------------------------|----------------|---------|-----------------|
| 10 | 7 | 7 | ATF16LV8C-10JU | 20J | Industrial |
| | | | ATF16LV8C-10SU | 20S | (-40°C to 85°C) |
| | | | ATF16LV8C-10XU | 20X | |

Using "C" Product for Industrial

To use commercial product for industrial temperature ranges, simply de-rate I_{CC} by 15% on the "C" device. No speed de-rating is necessary.


| | Package Type | | | | | |
|------|---|--|--|--|--|--|
| 20J | 20J 20-lead, Plastic J-leaded Chip Carrier (PLCC) | | | | | |
| 20P3 | 20-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | | |
| 20\$ | 20-lead, 0.300" Wide, Plastic Gull-wing Small Outline (SOIC) | | | | | |
| 20X | 20-lead, 4.4 mm Wide, Plastic Thin Shrink Small Outline (TSSOP) | | | | | |





Packaging Information

20J - PLCC

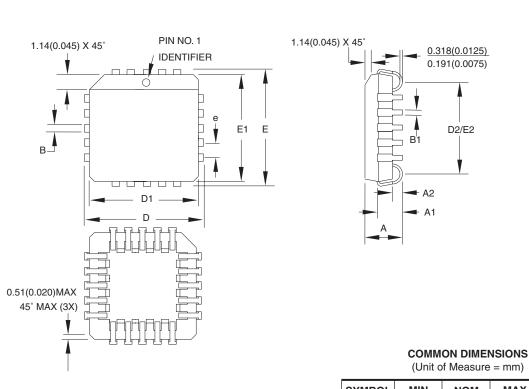

Notes:

- 1. This package conforms to JEDEC reference MS-018, Variation AA.
- Dimensions D1 and E1 do not include mold protrusion.
 Allowable protrusion is .010"(0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
- 3. Lead coplanarity is 0.004" (0.102 mm) maximum.

| SYMBOL | MIN | NOM | MAX | NOT |
|--------|-------|-----|--------|------|
| Α | 4.191 | _ | 4.572 | |
| A1 | 2.286 | - | 3.048 | |
| A2 | 0.508 | _ | _ | |
| D | 9.779 | _ | 10.033 | |
| D1 | 8.890 | _ | 9.042 | Note |
| Е | 9.779 | _ | 10.033 | |


| L | D | 9.779 | _ | 10.033 | |
|---|-------|-----------|---|--------|--------|
| | D1 | 8.890 | - | 9.042 | Note 2 |
| | Е | 9.779 | - | 10.033 | |
| | E1 | 8.890 | - | 9.042 | Note 2 |
| | D2/E2 | 7.366 | _ | 8.382 | |
| ſ | В | 0.660 | _ | 0.813 | |
| | B1 | 0.330 | _ | 0.533 | |
| Γ | Д | 1 270 TYP | | | |


10/04/01


| | TITLE | DRAWING NO. | REV. |
|--|--|-------------|------|
| 2325 Orchard Parkway San Jose, CA 95131 | 20J, 20-lead, Plastic J-leaded Chip Carrier (PLCC) | 20J | В |

ATF16LV8C

20P3 - PDIP



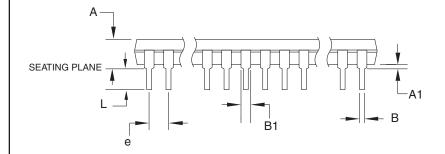



Notes:

- 1. This package conforms to JEDEC reference MS-001, Variation AD.
- 2. Dimensions D and E1 do not include mold Flash or Protrusion. Mold Flash or Protrusion shall not exceed 0.25 mm (0.010").

COMMON DIMENSIONS

(Unit of Measure = mm)

| SYMBOL | MIN | NOM | MAX | NOTE |
|--------|--------|---------|--------|--------|
| Α | _ | _ | 5.334 | |
| A1 | 0.381 | _ | _ | |
| D | 24.892 | _ | 26.924 | Note 2 |
| E | 7.620 | _ | 8.255 | |
| E1 | 6.096 | _ | 7.112 | Note 2 |
| В | 0.356 | _ | 0.559 | |
| B1 | 1.270 | _ | 1.551 | |
| L | 2.921 | - | 3.810 | |
| С | 0.203 | _ | 0.356 | |
| еВ | _ | _ | 10.922 | |
| eC | 0.000 | _ | 1.524 | |
| е | | 2.540 T | YP | |

1/23/04

REV.

2325 Orchard Parkway San Jose, CA 95131 **TITLE 20P3**, 20-lead (0.300"/7.62 mm Wide) Plastic Dual Inline Package (PDIP)


DRAWING NO. 20P3

)3 D






20S - SOIC

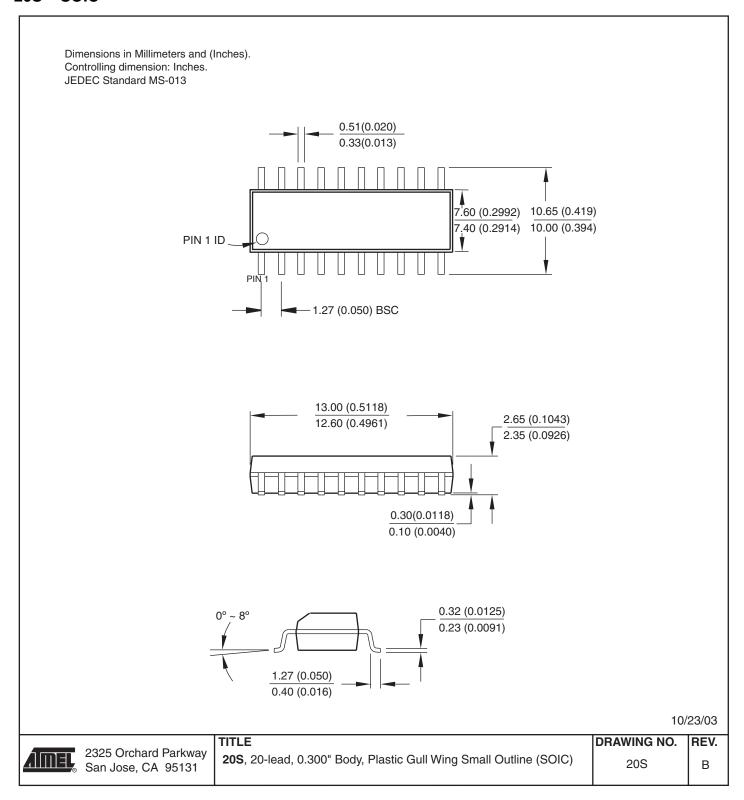



ATF16LV8C

20X - TSSOP

Dimensions in Millimeters and (Inches). Controlling dimension: Millimeters. JEDEC Standard MO-153 AC

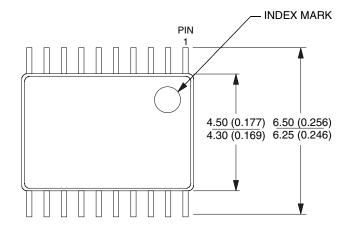

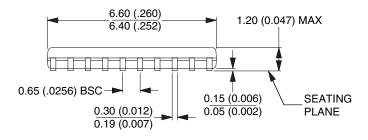



10/23/03

REV.

2325 Orchard Parkway San Jose, CA 95131 **TITLE 20X**, (Formerly 20T), 20-lead, 4.4 mm Body Width, Plastic Thin Shrink Small Outline Package (TSSOP)

DRAWING NO. 20X

C





Revision History

| Revision Level – Revision Date | History |
|--------------------------------|------------------------------|
| H – June 2006 | Added Green package options. |



Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311

Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl

Route des Arsenaux 41 Case Postale 80 CH-1705 Fribourg Switzerland

Tel: (41) 26-426-5555 Fax: (41) 26-426-5500

Asia

Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimshatsui East Kowloon Hong Kong

Tel: (852) 2721-9778 Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 Japan

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway San Jose, CA 95131, USA Tel: 1(408) 441-0311 Fax: 1(408) 436-4314

La Chantrerie BP 70602 44306 Nantes Cedex 3, France Tel: (33) 2-40-18-18-18 Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle 13106 Rousset Cedex, France Tel: (33) 4-42-53-60-00

Fax: (33) 4-42-53-60-01
1150 East Chevenne Mtn. Blvd.

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Scottish Enterprise Technology Park Maxwell Building East Kilbride G75 0QR, Scotland

Colorado Springs, CO 80906, USA

Tel: (44) 1355-803-000 Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2 Postfach 3535 74025 Heilbronn, Germany Tel: (49) 71-31-67-0 Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd. Colorado Springs, CO 80906, USA

Tel: 1(719) 576-3300 Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/ High-Speed Converters/RF Datacom

Avenue de Rochepleine BP 123

38521 Saint-Egreve Cedex, France

Tel: (33) 4-76-58-30-00 Fax: (33) 4-76-58-34-80

Literature Requests www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2006 Atmel Corporation. All rights reserved. Atmel[®], logo and combinations thereof, Everywhere You Are[®] and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.