

## BAS32L High-speed switching diode Rev. 7 – 20 January 2011

**Product data sheet** 

## 1. Product profile

#### 1.1 General description

Single high-speed switching diode, fabricated in planar technology, and encapsulated in a small hermetically sealed glass SOD80C Surface-Mounted Device (SMD) package.

#### 1.2 Features and benefits

- High switching speed: t<sub>rr</sub> ≤ 4 ns
- Reverse voltage:  $V_R \le 75 \text{ V}$
- Repetitive peak reverse voltage: V<sub>RRM</sub> ≤ 100 V
- Repetitive peak forward current: I<sub>FRM</sub> ≤ 450 mA
- Small hermetically sealed glass SMD package

#### 1.3 Applications

- High-speed switching
- Reverse polarity protection

#### 1.4 Quick reference data

#### Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
I <sub>F</sub>	forward current		<u>[1]</u> _	-	200	mA
I <sub>FRM</sub>	repetitive peak forward current		-	-	450	mA
V <sub>R</sub>	reverse voltage		-	-	75	V
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 100 mA	-	-	1000	mV
t <sub>rr</sub>	reverse recovery time		[2] _	-	4	ns

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] When switched from I<sub>F</sub> = 10 mA to I<sub>R</sub> = 10 mA; R<sub>L</sub> = 100  $\Omega$ ; measured at I<sub>R</sub> = 1 mA.

# nexperia

## 2. Pinning information

Table 2. Pin	Pinning Description	Simplified outline	Graphic symbol
1	cathode	[ <u>1]</u>	
2	anode	k a	1 - 2 006aab040

[1] The marking band indicates the cathode.

## 3. Ordering information

Table 3. Order	ring informa	tion	
Type number	Package		
	Name	Description	Version
BAS32L	-	hermetically sealed glass surface-mounted package; 2 connectors	SOD80C

## 4. Marking

Table 4.	Marking codes	
Type num	ber	Marking code
BAS32L		marking band

## 5. Limiting values

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

			,		
Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>RRM</sub>	repetitive peak reverse voltage		-	100	V
V <sub>R</sub>	reverse voltage		-	75	V
l <sub>F</sub>	forward current		<u>[1]</u> -	200	mA
I <sub>FRM</sub>	repetitive peak forward current		-	450	mA
I <sub>FSM</sub>	non-repetitive peak forward	square wave	[2]		
current	current	$t_p = 1 \ \mu s$	-	4	А
		t <sub>p</sub> = 1 ms	-	1	А
		t <sub>p</sub> = 1 s	-	0.5	А

Table 5.	Limiting	values	continued
----------	----------	--------	-----------

In accordance with the Absolute Maximum Rating System (IEC 60134).

			,		
Symbol	Parameter	Conditions	Min	Max	Unit
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = 25 °C	<u>[1]</u> -	500	mW
Tj	junction temperature		-	200	°C
T <sub>amb</sub>	ambient temperature		-65	+200	°C
T <sub>stg</sub>	storage temperature		-65	+200	°C

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[2]  $T_j = 25 \circ C$  prior to surge.

## 6. Thermal characteristics

Table 6.	Thermal characteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air	<u>[1]</u> _	-	350	K/W
R <sub>th(j-sp)</sub>	thermal resistance from junction to solder point		-	-	300	K/W

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

## 7. Characteristics

#### Table 7.Characteristics

 $T_{amb} = 25$  °C unless otherwise specified.

• • •		<b>A</b> 11/1		-		
Symbol	Parameter	Conditions	Mir	n Typ	Мах	Unit
V <sub>F</sub> forward voltage	forward voltage	$I_F = 5 \text{ mA}$	620	) -	750	mV
	I <sub>F</sub> = 100 mA	-	-	1000	mV	
		$I_F = 100 \text{ mA}; T_j = 100 ^{\circ}\text{C}$	-	-	930	mV
I <sub>R</sub> reverse current		V <sub>R</sub> = 20 V	-	-	25	nA
		V <sub>R</sub> = 75 V	-	-	5	μΑ
		$V_R$ = 20 V; $T_j$ = 150 °C	-	-	50	μΑ
		V <sub>R</sub> = 75 V; T <sub>j</sub> = 150 °C	-	-	100	μΑ
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 0 V; f = 1 MHz	-	-	2	pF
t <sub>rr</sub>	reverse recovery time		<u>[1]</u> -	-	4	ns
$V_{FR}$	forward recovery voltage		[2] _	-	2.5	V


[1] When switched from I<sub>F</sub> = 10 mA to I<sub>R</sub> = 10 mA; R<sub>L</sub> = 100  $\Omega$ ; measured at I<sub>R</sub> = 1 mA.

[2] When switched from  $I_F = 50$  mA;  $t_r = 20$  ns.

#### Nexperia


## High-speed switching diode

BAS32L

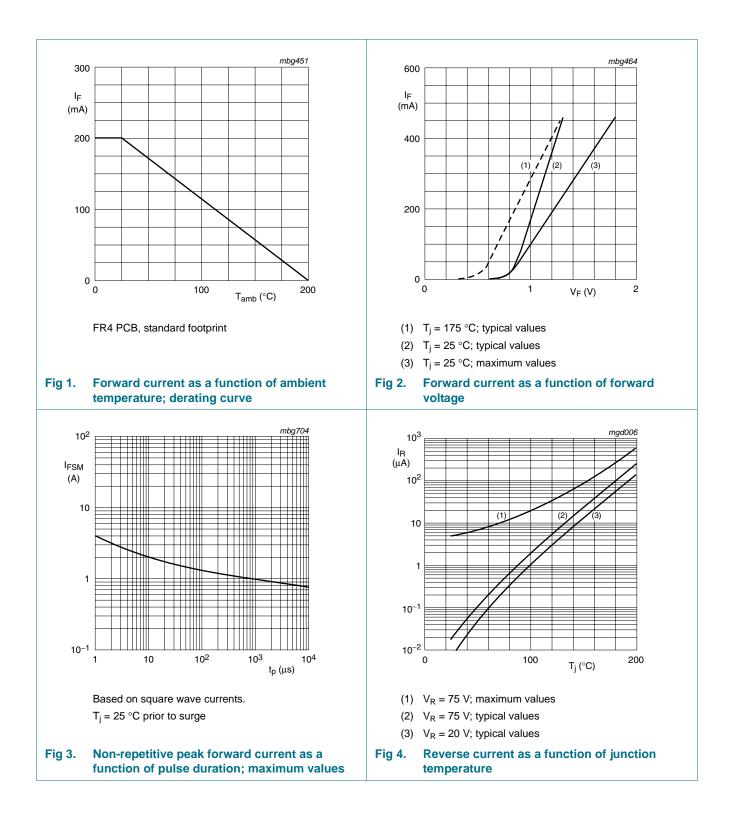


#### Nexperia

#### High-speed switching diode

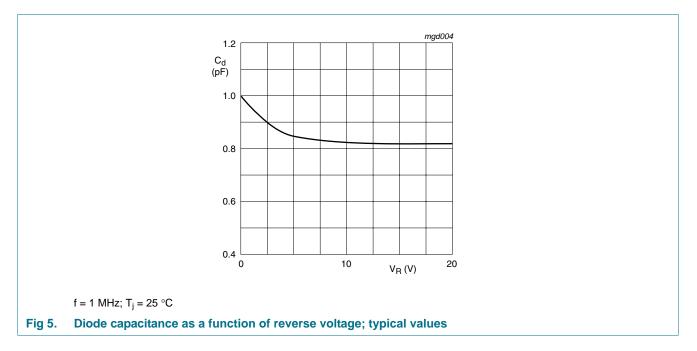


## 8. Test information

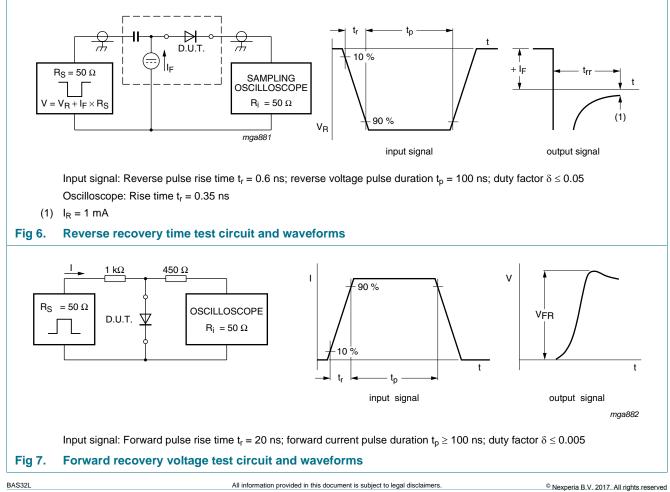

High-speed switching diode

## 9. Package outline

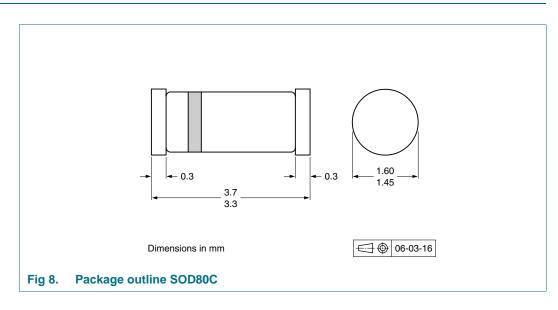

## **10. Packing information**

#### Table 8. Packing methods


The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description	Packing qu	antity
			2500	10000
BAS32L	SOD80C	4 mm pitch, 8 mm tape and reel	-115	-135

[1] For further information and the availability of packing methods, see <u>Section 14</u>.

High-speed switching diode

## **11. Soldering**

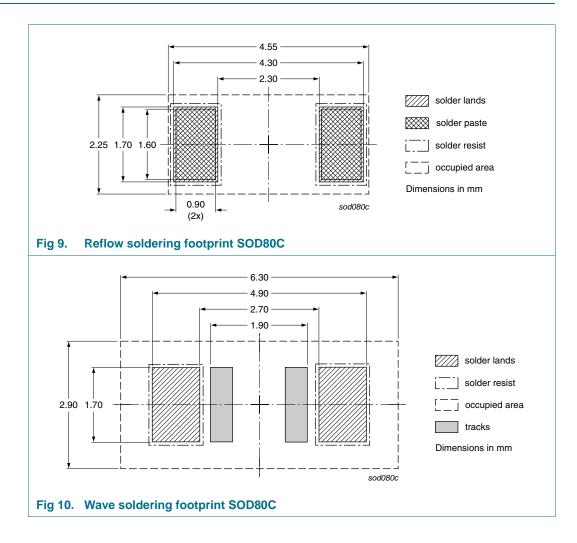

## **12. Revision history**

Document ID	Release date	Data sheet status	Change notice	Supersedes
BAS32L v.7	20110120	Product data sheet	-	BAS32L v.6
Modifications:	<ul> <li>Table 4 "Ma</li> </ul>	rking codes": amended		
	<ul> <li>Section 13 <sup>c</sup></li> </ul>	Legal information": updated		
BAS32L v.6	20081029	Product data sheet	-	BAS32L v.5
BAS32L v.5	20080103	Product data sheet	-	BAS32L v.4
BAS32L v.4	20050322	Product data sheet	-	BAS32L v.3
BAS32L v.3	20020123	Product specification	-	BAS32L v.2
BAS32L v.2	19960910	Product specification	-	BAS32L v.1
BAS32L v.1	19960423	Product specification	-	-

## 13. Legal information

#### 13.1 Data sheet status

Document status[1][2]	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 13.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any

representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and

customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

#### Terms and conditions of commercial sale - Nexperia

products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

All information provided in this document is subject to legal disclaimers.

# BAS32L

#### High-speed switching diode

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of

non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

#### 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 14. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com

## **15. Contents**

1	Product profile 1
1.1	General description 1
1.2	Features and benefits 1
1.3	Applications 1
1.4	Quick reference data 1
2	Pinning information 2
3	Ordering information 2
4	Marking 2
5	Limiting values 2
6	Thermal characteristics 3
7	Characteristics 3
8	Test information 5
9	Package outline 6
10	Packing information 6
11	Soldering 7
12	Revision history 8
13	Legal information
13.1	Data sheet status
13.2	Definitions
13.3	Disclaimers
13.4	Trademarks 10
14	Contact information 10
15	Contents 11

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia: BAS32L,135 BAS32L,115