### AUTOMOTIVE GRADE

PD - 96340

# International **tor** Rectifier

### INSULATED GATE BIPOLAR TRANSISTOR

#### Features

- Standard: optimized for minimum saturation voltage and low operating frequencies (< 1kHz)
- Lead-Free, RoHS Compliant
- Automotive Qualified \*

#### **Benefits**

 Typical Applications: PTC Heater, Discharge Switch & Relay Replacements AUIRG4BC30S-S AUIRG4BC30S-SL Standard Speed IGBT  $V_{CES} = 600V$  $V_{CE(on) typ.} = 1.4V$  $@V_{GE} = 15V, I_C = 18A$ 

AUIRG4BC30S-S AUIRG4BC30S-SL

G	C	E
Gate	Collector	Emitter

#### **Absolute Maximum Ratings**

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature ( $T_A$ ) is 25°C, unless otherwise specified

	Parameter	Max.	Units
V <sub>CES</sub>	Collector-to-Emitter Breakdown Voltage	600	V
I <sub>C</sub> @ T <sub>C</sub> = 25°C	Continuous Collector Current	34	
I <sub>C</sub> @ T <sub>C</sub> = 100°C	Continuous Collector Current	18	A
I <sub>CM</sub>	Pulsed Collector Current ①	68	7
I <sub>LM</sub>	Clamped Inductive Load Current @	68	
V <sub>GE</sub>	Gate-to-Emitter Voltage	±20	V
E <sub>ARV</sub>	Reverse Voltage Avalanche Energy ③	10	mJ
$P_D @ T_C = 25^{\circ}C$	Maximum Power Dissipation	100	w
$P_D @ T_C = 100^{\circ}C$	Maximum Power Dissipation	42	~ ~ ~
TJ	Operating Junction and	-55 to +150	
T <sub>STG</sub>	Storage Temperature Range		°C
	Soldering Temperature, for 10 seconds	300 (0.063 in. (1.6mm) from case )	1

#### **Thermal Resistance**

	Parameter	Тур.	Max.	Units
R <sub>0JC</sub>	Junction-to-Case		1.2	
R <sub>0CS</sub>	Case-to-Sink, Flat, Greased Surface	0.50		°C/W
R <sub>0JA</sub>	Junction-to-Ambient, typical socket mount		40	
Wt	Weight	1.44		g (oz)

\* When mounted on 1" square PCB (FR-4 or G-10 Material ). For recommended footprint and soldering techniques refer to application note #AN-994.

# International **tor** Rectifier

### Electrical Characteristics @ $T_J = 25^{\circ}C$ (unless otherwise specified)

	Parameter	Min.	Тур.	Max.	Units	Conditions	
V <sub>(BR)CES</sub>	Collector-to-Emitter Breakdown Voltage	600	—	_	V	$V_{GE}=0V,\ I_C=250\mu A$	
V <sub>(BR)ECS</sub>	Emitter-to-Collector Breakdown Voltage ④	18	—	_	V	$V_{GE} = 0V, I_{C} = 1.0A$	
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage		0.75	—	V/°C	$V_{GE} = 0V, I_C = 1.0mA$	
		_	1.40	1.6		I <sub>C</sub> = 18A	V <sub>GE</sub> = 15V
V <sub>CE(ON)</sub>	Collector-to-Emitter Saturation Voltage		1.84	_	l v	I <sub>C</sub> = 34A	See Fig. 2, 5
		_	1.45	_	v	$I_{C} = 18A$ , $T_{J} = 150^{\circ}C$	
V <sub>GE(th)</sub>	Gate Threshold Voltage	3.0	—	6.0		$V_{CE} = V_{GE}, I_C = 250 \mu A$	
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	_	-11	_	mV/°C	$V_{CE} = V_{GE}$ , $I_C = 250 \mu A$	
<b>g</b> fe	Forward Transconductance (5)	6.0	11	—	S	$V_{CE} = 100V, I_{C} = 18A$	
I <sub>CES</sub>	Zero Gate Voltage Collector Current	—	—	250	$\mu A$ $V_{GE} = 0V, V_{CE} = 600$		
ICES			—	2.0	μ	$V_{GE} = 0V, V_{CE} = 10V, T_{J}$	= 25°C
		—	—	1000		$V_{GE} = 0V, V_{CE} = 600V, T_{J} = 150^{\circ}C$	
I <sub>GES</sub>	Gate-to-EmitterLeakageCurrent	—	—	±100	nA	$V_{GE} = \pm 20V$	

### Switching Characteristics @ $T_J = 25^{\circ}C$ (unless otherwise specified)

	Parameter	Min.	Тур.	Max.	Units	Conditions
Qg	Total Gate Charge (turn-on)	—	50	75		I <sub>C</sub> = 18A
Q <sub>ge</sub>	Gate - Emitter Charge (turn-on)	_	7.3	11	nC	V <sub>CC</sub> = 400V See Fig. 8
Q <sub>gc</sub>	Gate - Collector Charge (turn-on)	—	17	26		V <sub>GE</sub> = 15V
t <sub>d(on)</sub>	Turn-On Delay Time	_	22	_		
tr	Rise Time	—	18	—	ns	$T_J = 25^{\circ}C$
t <sub>d(off)</sub>	Turn-Off Delay Time	—	540	810	113	$I_{C} = 18A, V_{CC} = 480V$
t <sub>f</sub>	Fall Time	—	390	590		$V_{GE} = 15V, R_G = 23\Omega$
Eon	Turn-On Switching Loss	—	0.26	_		Energy losses include "tail"
E <sub>off</sub>	Turn-Off Switching Loss	—	3.45	_	mJ	See Fig. 9, 10, 14
E <sub>ts</sub>	Total Switching Loss	—	3.71	5.6		
t <sub>d(on)</sub>	Turn-On Delay Time	_	21	_		$T_{J} = 150^{\circ}C,$
tr	Rise Time	_	19	_	ns	$I_{C} = 18A, V_{CC} = 480V$
t <sub>d(off)</sub>	Turn-Off Delay Time	_	790	_	115	$V_{GE} = 15V, R_G = 23\Omega$
t <sub>f</sub>	Fall Time	_	760	_		Energy losses include "tail"
Ets	Total Switching Loss	_	6.55	_	mJ	See Fig. 11, 14
LE	Internal Emitter Inductance	—	7.5	—	nH	Measured 5mm from package
Cies	Input Capacitance	_	1100	_		$V_{GE} = 0V$
Coes	OutputCapacitance	_	72	—	pF	V <sub>CC</sub> = 30V See Fig. 7
C <sub>res</sub>	Reverse Transfer Capacitance	—	13	—		f = 1.0MHz

#### Notes:

- $\odot$  Repetitive rating; V<sub>GE</sub> = 20V, pulse width limited by max. junction temperature (See fig. 13b).
- O  $V_{CC}$  = 80%(V\_{CES}),  $V_{GE}$  = 20V, L = 10  $\mu H,$  R\_G = 23  $\Omega,$  (See fig. 13a).
- ③ Repetitive rating; pulse width limited by maximum junction temperature.
- ④ Pulse width  $\leq$  80µs; duty factor  $\leq$  0.1%.
- S Pulse width 5.0µs, single shot.

## **Qualification Information<sup>†</sup>**

		Automotive				
		(per AEC-Q101) <sup>††</sup>				
qualification. IR's Industrial and Consun			This part number(s) passed Automotive IR's Industrial and Consumer qualification red by extension of the higher Automotive			
		D <sup>2</sup> PAK	MSL1 <sup>†††</sup>			
Moisture Sens	itivity Level		(per IPC/JEDEC J-STD-020)			
		TO-262	N/A			
	Machine Model	Class M4 (400V)				
		AEC-Q101-002				
505	Human Body Model	Class H1C (2000V)				
ESD	ESD		AEC-Q101-001			
	Charged Device Model		Class C5 (1000V)			
		AEC-Q101-005				
RoHS Compliant		Yes				

 $\label{eq:constant} \mbox{ + Qualification standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site: $ $ http://www.irf.com $ the standards can be found at International Rectifier's web site $ the standards can be found at International Rectifier's web site $ the standards can be found at International Rectifi$ 

**††** Exceptions to AEC-Q101 requirements are noted in the qualification report.

International

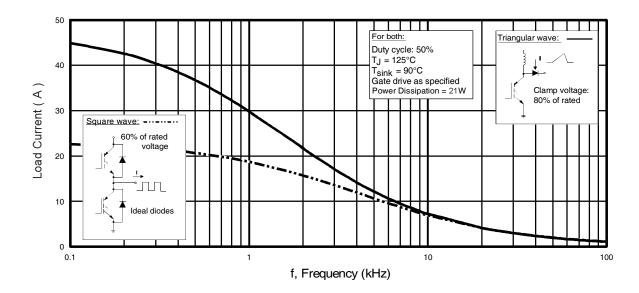
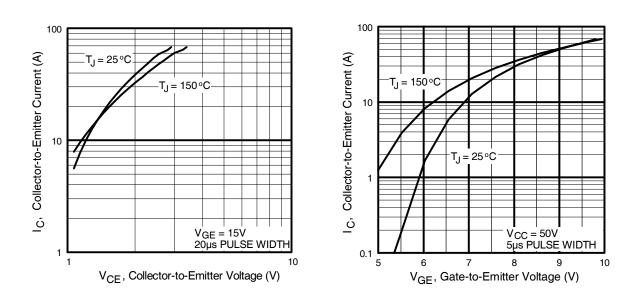


Fig. 1 - Typical Load Current vs. Frequency (Load Current = I<sub>RMS</sub> of fundamental)



**Fig. 2** - Typical Output Characteristics 4

Fig. 3 - Typical Transfer Characteristics www.irf.com

International

AUIRG4BC30S-S/SL

= 36 A

V<sub>GE</sub> = 15V 80 us PULSE WIDTH

3.0

2.5




Fig. 4 - Maximum Collector Current vs. Case Temperature




Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature


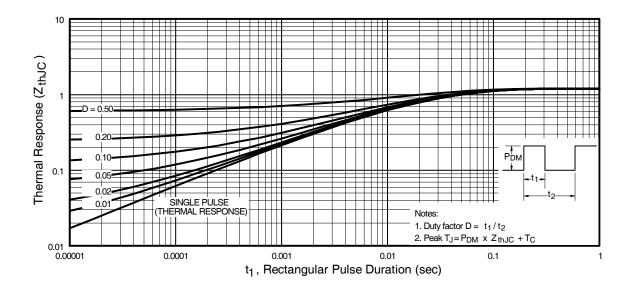


Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case



International








Fig. 9 - Typical Switching Losses vs. Gate Resistance




Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage






Fig. 10 - Typical Switching Losses vs. Junction Temperature

www.irf.com

6

International **tor** Rectifier





# AUIRG4BC30S-S/SL





Fig. 12 - Turn-Off SOA

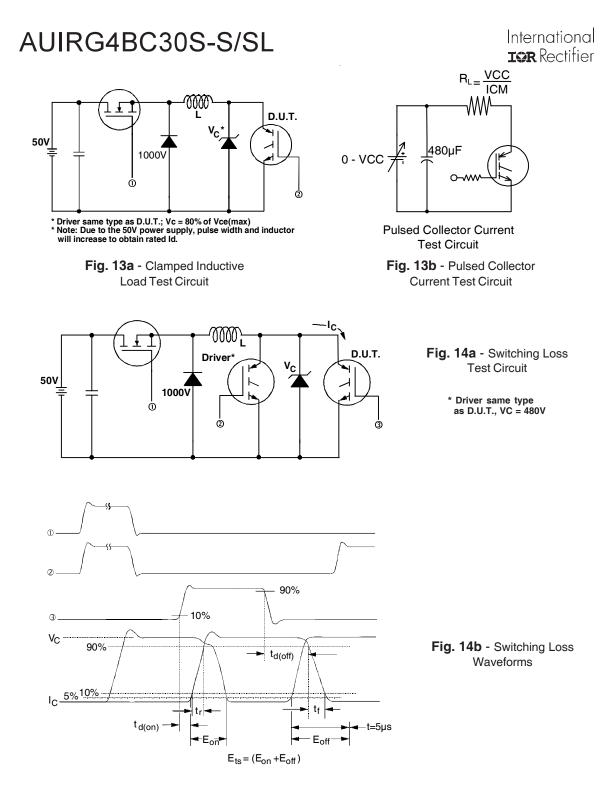


International **IOR** Rectifier

# AUIRG4BC30S-S/SL

## D<sup>2</sup>Pak (TO-263AB) Package Outline

Dimensions are shown in millimeters (inches)





1. DIMENSIONING AND TOLERANCING PER ASME Y14,5M-1994

2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].


3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH, MOLD FLASH SHALL NOT EXCEED 0.127 [.0.05"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.

4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1.

5. DIMENSION 61 AND c1 APPLY TO BASE METAL ONLY.

6. DATUM A & B TO BE DETERMINED AT DATUM PLANE H.

7, CONTROLLING DIMENSION: INCH. 8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-263AB



A

◬ YER A-A

H

S Y	DIMENSIONS							
M B O	MILLIM	ETERS	INC	HES	NOTES			
L	MIN.	MAX.	MIN.	MAX.	L L			
A	4.06	4.83	.160	.190				
<b>\1</b>	0.00	0.254	.000	.010				
b	0.51	0.99	.020	.039				
st	0.51	0.89	.020	.035	5			
2	1,14	1.78	.045	.070				
3	1,14	1,73	.045	.068	5			
с	0.38	0,74	.015	.029				
:1	0,38	0.58	.015	.023	5			
2	1,14	1.65	.045	.065				
D	8.38	9.65	.330	.380	3			
01	6.86	-	.270		4			
Ε	9,65	10,67	.380	.420	3,4			
1	6.22	-	.245		4			
е	2.54	BSC	.100	BSC				
н	14,61	15,88	.575	.625				
L	1.78	2.79	.070	.110				
.1	-	1.65	-	.066	4			
2	1.27	1.78	-	.070				
.3	0.25	BSC	.010	BSC				
4	4,78	5.28	.188	.208				

LEAD ASSIGNMENTS


HE XFE T 1.- GATE 2. 4.- DRAIN 3.- SOURCE

IGBTs. CoPACK 1.- GATE 2. 4.- COLLECTOR 3.- EMITTER

### DIODES 1.- ANODE \* 4.- CATHODE 3.- ANODE

\* PART DEPENDENT.

## D<sup>2</sup>Pak (TO-263AB) Part Marking Information

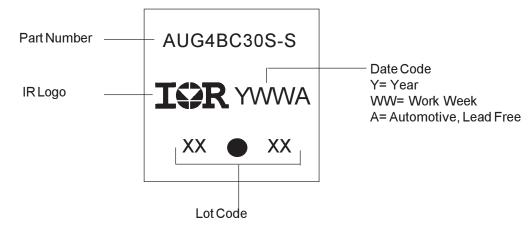


Note: For the most current drawing please refer to IR website at http://www.irf.com/package/ www.irf.com

### International **TOR** Rectifier

## TO-262 Package Outline

Dimensions are shown in millimeters (inches)

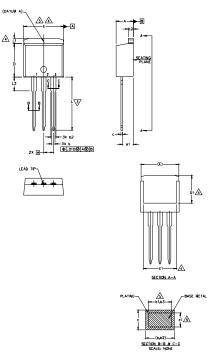

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

2. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].

3 DIMENSION D & E DO NOT INCLUDE WOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 [.005"] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.


A THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSION E, L1, D1 & E1. S DIMENSION 61 AND c1 APPLY TO BASE METAL ONLY.

6. CONTROLLING DIMENSION; INCH.

7.- OUTLINE CONFORM TO JEDEC TO-262 EXCEPT A1(max.), b(min.) AND D1(min.) WHERE DIMENSIONS DERIVED THE ACTUAL PACKAGE OUTLINE.

S Y M	DIMENSIONS			SIONS		
B	MILLIM	ETERS	INCHES		NOTES	
0 L	MIN.	MAX.	MIN.	MAX.	L S	
A	4.06	4.83	.160	.190		
A1	2.03	3.02	.080	.119		
ь	0.51	0.99	.020	.039		
b1	0.51	0.89	.020	.035	5	LEAD ASSIGNMENTS
b2	1.14	1.78	.045	.070		LEAD ASSIGNMENTS
ь3	1,14	1.73	.045	.068	5	
с	0.38	0.74	.015	.029		HEXFET
c1	0.38	0.58	.015	.023	5	1 GATE
c2	1,14	1.65	.045	.065		2 DRAIN
D	8.38	9,65	.330	.380	3	3 SOURCE 4 DRAIN
D1	6,86	-	.270	-	4	4 DRAIN
Ε	9.65	10.67	.380	.420	3,4	
E1	6.22	-	.245		4	IGBTs, CoPACK
е	2.54	BSC	.100	BSC		1 0175
L	13.46	14.10	.530	.555		1 GATE 2 COLLECTOR
L1	-	1.65	-	.065	4	3 EMITTER
L2	3.56	3.71	.140	.146		4 COLLECTOR

## TO-262 Part Marking Information

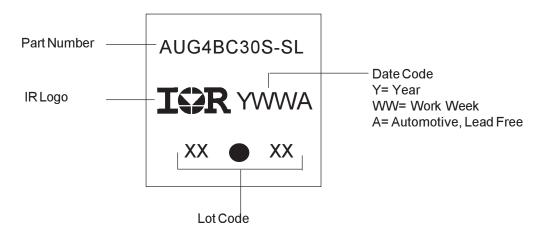


Note: For the most current drawing please refer to IR website at http://www.irf.com/package/

International

# AUIRG4BC30S-S/SL

## D<sup>2</sup>Pak Tape & Reel Information

Dimensions are shown in millimeters (inches)

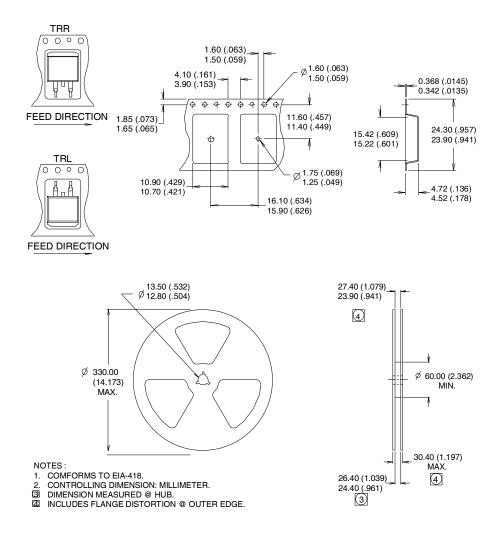

### International **IOR** Rectifier

### Ordering Information

Base part number	Package	Standard Pack		Complete Part Number
		Form	Quantity	
AUIRG4BC30S-SL	TO-262	Tube	50	AUIRG4BC30S-SL
AUIRG4BC30S-S	D2Pak	Tube	50	AUIRG4BC30S-S
		Tape and Reel Left	800	AUIRG4BC30SSTRL
		Tape and Reel Right	800	AUIRG4BC30SSTRR



## AUIRG4BC30S-S/SL IMPORTANTNOTICE

Unless specifically designated for the automotive market, International Rectifier Corporation and its subsidiaries (IR) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or services without notice. Part numbers designated with the "AU" prefix follow automotive industry and / or customer specific requirements with regards to product discontinuance and process change notification. All products are sold subject to IR's terms and conditions of sale supplied at the time of order acknowledgment.

IR warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with IR's standard warranty. Testing and other quality control techniques are used to the extent IR deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

IR assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using IR components. To minimize the risks with customer products and applications, customers should provide adequate design and operating safeguards.

Reproduction of IR information in IR data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alterations is an unfair and deceptive business practice. IR is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of IR products or serviced with statements different from or beyond the parameters stated by IR for that product or service voids all express and any implied warranties for the associated IR product or service and is an unfair and deceptive business practice. IR is not responsible or liable for any such statements.

IR products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of the IR product could create a situation where personal injury or death may occur. Should Buyer purchase or use IR products for any such unintended or unauthorized application, Buyer shall indemnify and hold International Rectifier and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that IR was negligent regarding the design or manufacture of the product.

IR products are neither designed nor intended for use in military/aerospace applications or environments unless the IR products are specifically designated by IR as military-grade or "enhanced plastic." Only products designated by IR as military-grade meet military specifications. Buyers acknowledge and agree that any such use of IR products which IR has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

IR products are neither designed nor intended for use in automotive applications or environments unless the specific IR products are designated by IR as compliant with ISO/TS 16949 requirements and bear a part number including the designation "AU". Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, IR will not be responsible for any failure to meet such requirements

For technical support, please contact IR's Technical Assistance Center

http://www.irf.com/technical-info/

#### WORLD HEADQUARTERS:

233 Kansas St., El Segundo, California 90245

Tel: (310) 252-7105

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

AUIRG4BC30S-S AUIRG4BC30SSTRL AUIRG4BC30SSTRR