**ON Semiconductor** 

Is Now

# Onsemi

To learn more about onsemi<sup>™</sup>, please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari



## MCT2EM, TIL111M, TIL117M 6-Pin General Purpose Phototransistor Optocouplers

### Features

- Minimum Current Transfer Ratio at I<sub>F</sub> = 10 mA,  $V_{CE}$  = 10 V:
  - 20% for MCT2EM
  - 50% for TIL117M
- Safety and Regulatory Approvals:
- UL1577, 4,170 VAC<sub>RMS</sub> for 1 Minute
- DIN-EN/IEC60747-5-5, 850 V Peak Working Insulation Voltage


## Applications

- Power Supply Regulators
- Digital Logic Inputs
- Microprocessor Inputs

## Description

The general purpose optocouplers consist of a gallium arsenide infrared emitting diode driving a silicon photo-transistor in a standard plastic six-pin dual-in-line package.

## Schematic

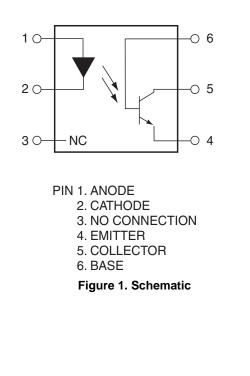

## Package Outlines




Figure 2. Package Outlines

## **Safety and Insulation Ratings**

As per DIN EN/IEC 60747-5-5, this optocoupler is suitable for "safe electrical insulation" only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

Parameter		Characteristics
Installation Classifications per DIN VDE	< 150 V <sub>RMS</sub>	I–IV
0110/1.89 Table 1, For Rated Mains Voltage	< 300 V <sub>RMS</sub>	I–IV
Climatic Classification		55/100/21
Pollution Degree (DIN VDE 0110/1.89)		2
Comparative Tracking Index		175

Symbol	Parameter	Value	Unit
M	Input-to-Output Test Voltage, Method A, $V_{IORM} \times 1.6 = V_{PR}$ , Type and Sample Test with t <sub>m</sub> = 10 s, Partial Discharge < 5 pC	1360	V <sub>peak</sub>
V <sub>PR</sub>	Input-to-Output Test Voltage, Method B, $V_{IORM} \times 1.875 = V_{PR}$ , 100% Production Test with $t_m = 1 \text{ s}$ , Partial Discharge < 5 pC	1594	V <sub>peak</sub>
V <sub>IORM</sub>	Maximum Working Insulation Voltage	850	V <sub>peak</sub>
V <sub>IOTM</sub>	Highest Allowable Over-Voltage	6000	V <sub>peak</sub>
	External Creepage	≥ 7	mm
	External Clearance	≥ 7	mm
	External Clearance (for Option TV, 0.4" Lead Spacing)	≥ 10	mm
DTI	Distance Through Insulation (Insulation Thickness)	≥ 0.5	mm
Τ <sub>S</sub>	Case Temperature <sup>(1)</sup>	175	°C
I <sub>S,INPUT</sub>	Input Current <sup>(1)</sup>	350	mA
P <sub>S,OUTPUT</sub>	Output Power <sup>(1)</sup>	800	mW
R <sub>IO</sub>	Insulation Resistance at T <sub>S</sub> , $V_{IO}$ = 500 $V^{(1)}$	> 10 <sup>9</sup>	Ω

Note:

1. Safety limit values – maximum values allowed in the event of a failure.

MCT2EM, TIL111M, TIL117M — 6-Pin General Purpose Phototransistor Optocouplers

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.  $T_A = 25^{\circ}C$  unless otherwise specified.

Symbol	Parameter	Device	Value	Unit
TOTAL DE	EVICE			
T <sub>STG</sub>	Storage Temperature	All	-40 to +125	°C
T <sub>OPR</sub>	Operating Temperature	All	-40 to +100	°C
ТJ	Junction Temperature	All	-40 to +125	°C
T <sub>SOL</sub>	Lead Solder Temperature	All	260 for 10 seconds	°C
Р	Total Device Power Dissipation @ T <sub>A</sub> = 25°C	All	250	mW
PD	Derate Above 25°C	All	2.94	mW/°C
EMITTER				
۱ <sub>F</sub>	DC/Average Forward Input Current	All	60	mA
V <sub>R</sub>		TIL111M	3	V
	Reverse Input Voltage	MCT2EM, TIL117M	6	V
l <sub>F</sub> (pk)	Forward Current – Peak (300 µs, 2% Duty Cycle)	All	3	А
Р	LED Power Dissipation @ T <sub>A</sub> = 25°C	All	120	mW
PD	Derate Above 25°C	All	1.41	mW/°C
DETECTO	)R			
V <sub>CEO</sub>	Collector-to-Emitter Voltage	All	30	V
V <sub>CBO</sub>	Collector-to-Base Voltage	All	70	V
V <sub>ECO</sub>	Emitter-to-Collector Voltage	All	7	V
$V_{\text{EBO}}$	Emitter-to-Base Voltage	All	7	V
Р	Detector Power Dissipation @ T <sub>A</sub> = 25°C	All	150	mW
PD	Derate Above 25°C	All	1.76	mW/°C

## **Electrical Characteristics**

TA =  $25^{\circ}$ C unless otherwise specified.

#### Individual Component Characteristics

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
EMITTER	-					
V <sub>F</sub>	Input Forward Voltage	I <sub>F</sub> = 10 mA		1.18	1.50	V
I <sub>R</sub>	Reverse Leakage Current	V <sub>R</sub> = 6.0 V		0.001	10	μA
DETECTOR						
BV <sub>CEO</sub>	Collector-to-Emitter Breakdown Voltage	I <sub>C</sub> = 1.0 mA, I <sub>F</sub> = 0	30	100		V
BV <sub>CBO</sub>	Collector-to-Base Breakdown Voltage	I <sub>C</sub> = 100 μA, I <sub>F</sub> = 0	70	120		V
BV <sub>EBO</sub>	Emitter-to-Base Breakdown Voltage	I <sub>E</sub> = 10 uA, I <sub>F</sub> = 0	7	10		V
BV <sub>ECO</sub>	Emitter-to-Collector Breakdown Voltage	I <sub>E</sub> = 100 μA, I <sub>F</sub> = 0	7	10		V
I <sub>CEO</sub>	Collector-to-Emitter Dark Current	V <sub>CE</sub> = 10 V, I <sub>F</sub> = 0		1	50	nA
I <sub>CBO</sub>	Collector-to-Base Dark Current	V <sub>CB</sub> = 10 V			20	nA
C <sub>CE</sub>	Capacitance	V <sub>CE</sub> = 0 V, f = 1 MHz		8		pF


#### **Transfer Characteristics**

Symbol	Parameter	Test Conditions	Device	Min.	Тур.	Max.	Unit
DC CHARA	DC CHARACTERISTICS						
CTR	Current Transfer Ratio, Collector-to-Emitter	I <sub>F</sub> = 10 mA, V <sub>CF</sub> = 10 V	MCT2EM	20			%
UIK		$r_{\rm F} = 10  {\rm mz},  v_{\rm CE} = 10  {\rm v}$	TIL117M	50			%
V	Collector-to-Emitter	I <sub>C</sub> = 2 mA, I <sub>F</sub> = 16 mA	MCT2EM, TIL111M			0.4	V
V <sub>CE (SAT)</sub>	Saturation Voltage	I <sub>C</sub> = 0.5 mA, I <sub>F</sub> = 10 mA	TIL117M			0.4	V
AC CHARACTERISTICS							
T <sub>ON</sub>	Non-Saturated Turn-on Time	I <sub>F</sub> = 10 mA, V <sub>CC</sub> = 10 V,	MCT2EM		2		116
		$R_L = 100 \Omega$ (Figure 13)			2		μs
' ON		$I_{C} = 2 \text{ mA}, V_{CC} = 10 \text{ V},$ R <sub>1</sub> = 100 Ω (Figure 13)	TIL117M		2	10	μs
T <sub>OFF</sub> Turn-off Time	Turn off Time	$I_F = 10 \text{ mA}, V_{CC} = 10 \text{ V},$ $R_L = 100 \Omega \text{ (Figure 13)}$	MCT2EM		2		μs
		$I_{C}$ = 2 mA, V <sub>CC</sub> = 10 V, R <sub>L</sub> = 100 Ω (Figure 13)	TIL117M		2	10	μs


#### **Isolation Characteristics**


Symbol	Characteristic	Test Conditions	Min.	Тур.	Max.	Unit
V <sub>ISO</sub>	Input-Output Isolation Voltage	t = 1 Minute	4170			VAC <sub>RMS</sub>
C <sub>ISO</sub>	Isolation Capacitance	V <sub>I-O</sub> = 0 V, f = 1 MHz		0.2		pF
R <sub>ISO</sub>	Isolation Resistance	$V_{I-O}$ = ±500 VDC, $T_A$ = 25°C	10 <sup>11</sup>			Ω

MCT2EM, TIL111M, TIL117M — 6-Pin General Purpose Phototransistor Optocouplers

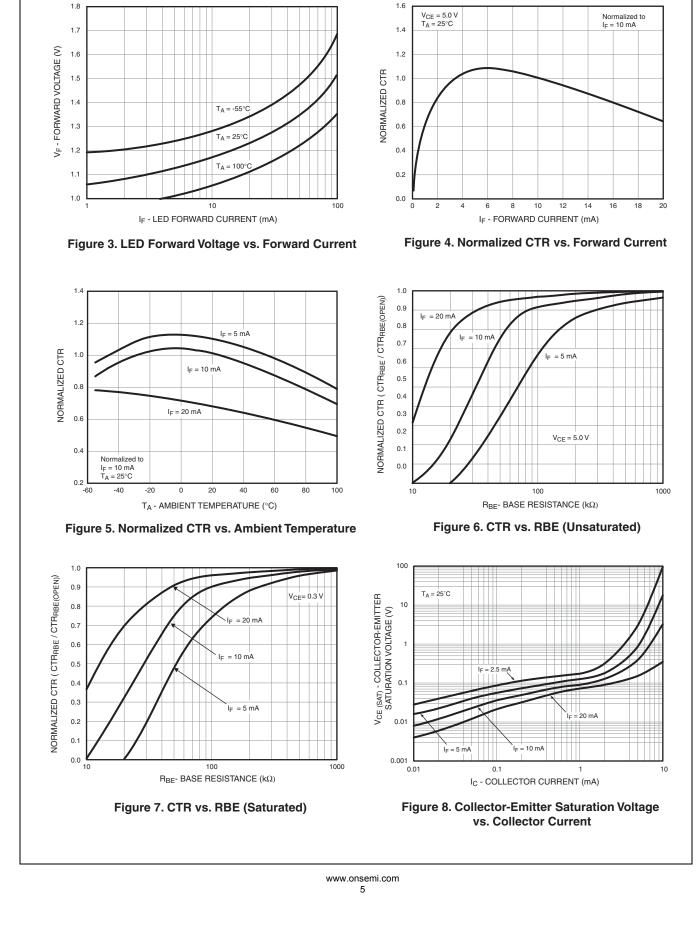

**Typical Performance Curves** 

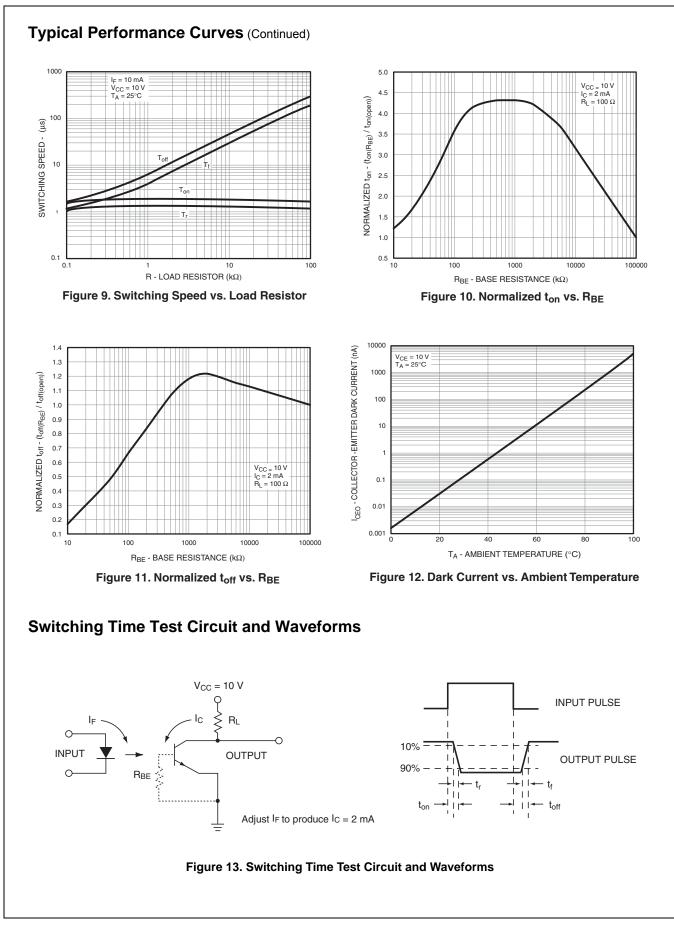

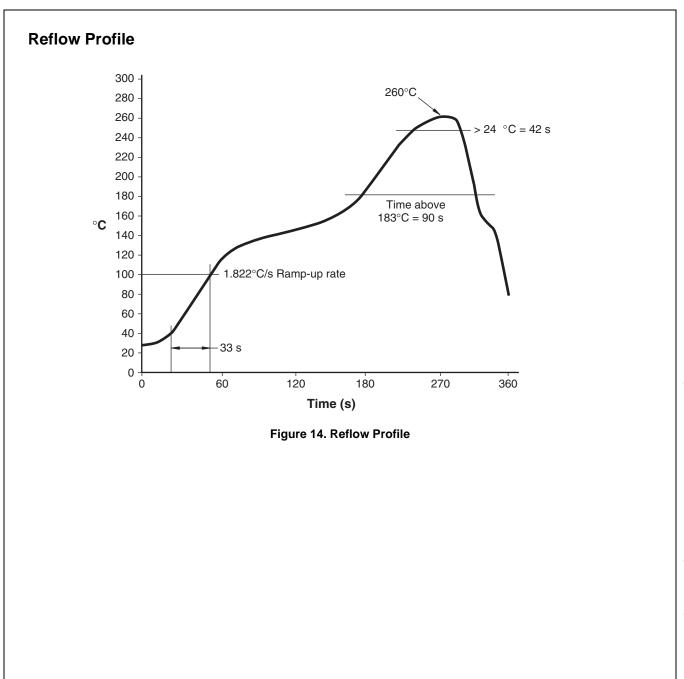

## **Ordering Information**

Part Number	Package	Packing Method
MCT2EM	DIP 6-Pin	Tube (50 Units)
MCT2ESM	SMT 6-Pin (Lead Bend)	Tube (50 Units)
MCT2ESR2M	SMT 6-Pin (Lead Bend)	Tape and Reel (1000 Units)
MCT2EVM	DIP 6-Pin, DIN EN/IEC60747-5-5 Option	Tube (50 Units)
MCT2ESVM	SMT 6-Pin (Lead Bend), DIN EN/IEC60747-5-5 Option	Tube (50 Units)
MCT2ESR2VM	SMT 6-Pin (Lead Bend), DIN EN/IEC60747-5-5 Option	Tape and Reel (1000 Units)
MCT2ETVM	DIP 6-Pin, 0.4" Lead Spacing, DIN EN/IEC60747-5-5 Option	Tube (50 Units)

#### Note:

2. The product orderable part number system listed in this table also applies to the TIL111M and TIL117M devices.

## **Marking Information**




Figure 15. Top Mark

#### Table 1. Top Mark Definitions

1	ON Semiconductor Logo
2	Device Number
3	DIN EN/IEC60747-5-5 Option (only appears on component ordered with this option)
4	One-Digit Year Code, e.g., "6"
5	Digit Work Week, Ranging from "01" to "53"
6	Assembly Package Code

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

<u>TIL117SVM MCT2EM TIL111SR2VM TIL117SR2VM TIL111M TIL117SR2M TIL117M TIL117TVM TIL111SR2M</u> <u>TIL111SM TIL111VM TIL111SVM TIL11SVM TIL117SM TIL117VM MCT2ESVM MCT2ETVM MCT2ESR2M</u> MCT2EVM MCT2ESM MCT2ESR2VM