



Mallory Sonalert Products, Inc.

Part #:

**FL1P-12QW-1
12mm Panel Light**

Sales Outline Drawing

Revision:


B

Specifications:

| | |
|---------------------------------|------------------------------|
| Panel Hole | 12 mm |
| Voltage Type | AC/DC |
| LED Color Available | Red, Green, Yellow, or White |
| Lens Color | Same as LED |
| Rated Voltage Available | See table below |
| Max Current Draw | 20 mA |
| Storage & Operating Temperature | -15 °C to +80 °C |
| Ingress Protection Rating | IP50 |
| LED Life | 70,000 hours |
| Weight (Typical) | 4 g |
| Housing Material | PA66 |
| Termination Type | Wires |
| Terminal Dimension | 7.3" (185mm) PVC AWG22 |
| Panel Thickness | up to 0.39" (9.8mm) |

RoHS Compliant

Dimensions (mm):

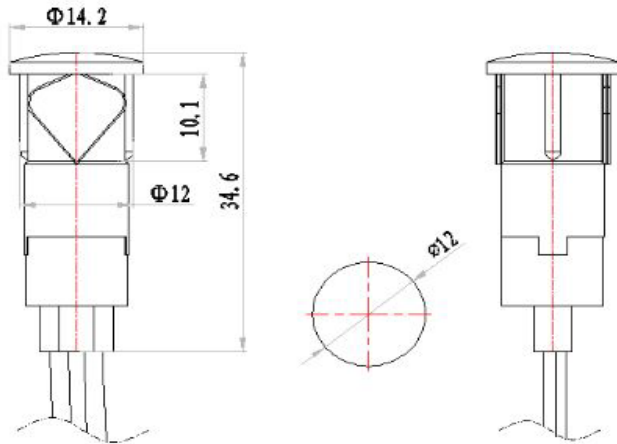

Part Number:

FL1P-12QW-1-X#V

G=Green
R=Red
Y=Yellow
W=White

Rated Voltage

Lead color may vary

Length for reference only.

| | Light Intensity | Dominant Wavelength | Viewing Angle |
|--------|-----------------|---------------------|---------------|
| Red | 1000 -1500 mcd | 622 nm | 35° |
| Green | 8000 -10000 mcd | 522 nm | 60° |
| Yellow | 1000 -1500 mcd | 590 nm | 35° |

| Rated Voltage | 2 VAC/DC | 3 VAC/DC | 6 VAC/DC | 12 VAC/DC | 24 VAC/DC | 48 VAC/DC | 110 VAC/DC | 220 VAC/DC | 380 VAC/DC |
|---------------|----------|----------|----------|------------|------------|------------|------------|------------|------------|
| Red | 1.8-2.2V | 2.7-3.3V | 5.4-6.6V | 10.8-13.2V | 21.6-26.4V | 43.2-52.8V | 99-121V | 198-242V | 342-418V |
| Green | N/A | 3-3.2V | 5.4-6.6V | 10.8-13.2V | 21.6-26.4V | 43.2-52.8V | 99-121V | 198-242V | 342-418V |
| Yellow | 2-2.2V | 2.7-3.3V | 5.4-6.6V | 10.8-13.2V | 21.6-26.4V | 43.2-52.8V | 99-121V | 198-242V | 342-418V |
| White | N/A | 3-3.2V | 5.4-6.6V | 10.8-13.2V | 21.6-26.4V | 43.2-52.8V | 99-121V | 198-242V | 342-418V |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert:

[FL1P-12QW-1-Y12V](#) [FL1P-12QW-1-Y2V](#) [FL1P-12QW-1-G12V](#) [FL1P-12QW-1-G24V](#) [FL1P-12QW-1-G3V](#) [FL1P-12QW-1-R12V](#) [FL1P-12QW-1-Y110V](#) [FL1P-12QW-1-Y24V](#) [FL1P-12QW-1-R110V](#) [FL1P-12QW-1-R24V](#) [FL1P-12QW-1-R2V](#) [FL1P-12QW-1-G110V](#)