




GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz

Typical Applications

The HMC641ALC4 is ideal for:

- Telecom Infrastructure
- Microwave Radio & VSAT
- Military & Space Hybrids
- Test Instrumentation
- SATCOM & Sensors

Functional Diagram



Features

Broadband Performance: DC - 20 GHz

High Isolation: 42 dB @ 12 GHz

Low Insertion Loss: 2.1 dB @ 12 GHz

Integrated 2:4 TTL Decoder

24 Lead 4x4mm SMT Package: 16mm²

General Description

The HMC641ALC4 is a broadband non-reflective GaAs pHEMT SP4T switch in a compact 4x4 mm ceramic package. Covering DC to 20 GHz, this switch offers high isolation, low insertion loss and on-chip termination of isolated ports. This switch also includes an on board binary decoder circuit which reduces the number of required logic control lines from four to two. The HMC641ALC4 is controlled with 0/-5V logic, exhibits fast switching speed and consumes much less DC current than pin diode based solutions.

Electrical Specifications, $T_A = +25^{\circ}$ C, With 0/-5V Control, Vss = -5V, 50 Ohm System


Parameter		Frequency	Min.	Тур.	Max.	Units
Insertion Loss		DC - 12 GHz DC - 20 GHz		1.8 2.3	2.8 3.5	dB dB
Isolation (RFC to RF1 - RF4)		DC - 12 GHz DC - 20 GHz	30 30	42 40		dB dB
Return Loss	"On State"	DC - 12 GHz DC - 20 GHz		18 17		dB dB
Return Loss	"Off State"	DC - 20 GHz		19		dB
Input Power for 1 dB Compression		0.05 - 0.25 GHz 0.25- 20 GHz	10 20	15 25		dBm dBm
Input Third Order Intercept (Two-Tone Input Power= +10 dBm Each Tone)		0.05 - 0.25 GHz 0.25 - 20 GHz		32 41		dBm dBm
Switching Characteristics tRISE, tFALL (10/90% RF) tON, tOFF (50% CTL to 10/90% RF)		DC - 20 GHz		30 100		ns ns






GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz


Insertion Loss vs. Temperature




Isolation




Return Loss



1 dB Input Compression Point



Input Third Order Intercept Point @ 10 dBm Tone Power







GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz

Absolute Maximum Ratings

-7V
Vss -0.5V to +1V
+26.5 dBm +23 dBm
150 °C
201 °C/W 321 °C/W
-65 to +150 °C
-40 to +85 °C



Truth Table

Control Input		Signal Path State
Α	В	RFC to:
High	High	RF1
Low	High	RF2
High	Low	RF3
Low	Low	RF4

Bias Voltage & Current

Vss Range= -5.0 Vdc ±10%		
Vss (Vdc)	Iss (Typ) (mA)	Iss (Max) (mA)
-5	1.8	5.0

TTL/CMOS Control Voltages

State	Bias Condition
Low	-2.5V to 0V @ 30 μA Typ.
High	-5V to -3.8V @ 0.5 μA Typ.






GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz

Outline Drawing

BOTTOM VIEW

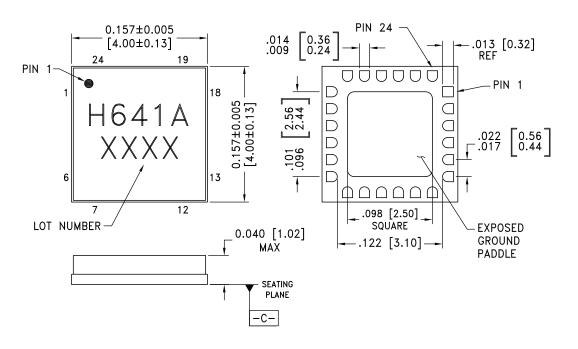

NOTES:

- 1. PACKAGE BODY MATERIAL: ALUMINA
- 2. LEAD AND GROUND PADDLE PLATING: 30-80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKEL.
- 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].
- 4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
- 5. PACKAGE WARP SHALL NOT EXCEED 0.05mm DATUM -C-
- 6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking [2]
HMC641ALC4	Alumina, White	Gold over Nickel	MSL3 ^[1]	H641A XXXX

^[1] Max peak reflow temperature of 260 $^{\circ}\text{C}$

^{[2] 4-}Digit lot number XXXX





GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz

Pin Descriptions


Pin Number	Function	Description	Interface Schematic
1, 5, 6, 13, 18	N/C	These pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
2, 4, 7, 9, 10, 12, 17, 19, 21, 22, 24 Ground Paddle	GND	These pins and the exposed ground paddle must be connected to RF/DC ground.	= GND
3, 8, 11, 20, 23	RFC, RF1, RF2, RF3, RF4	These pads are DC coupled and matched to 50 Ohms. Blocking capacitors are required if RF line potential is not equal to 0V.	
14	Vss	Supply Voltage -5 Vdc ± 10%.	
15	CTLB	See Truth Table and Control Voltage Table.	CTLA O 100k
16	CTLA	See Truth Table and Control Voltage Table.	CTLB Vss





GaAs MMIC SP4T NON-REFLECTIVE SWITCH, DC - 20 GHz

Evaluation PCB

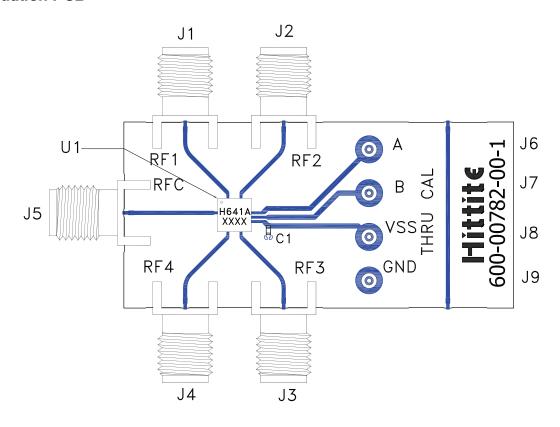

List of Materials for Evaluation PCB EVAL01 - HMC641ALC4 [1]

Item	Description	
J1 - J5	PCB Mount SMA Connector	
J6 - J9	DC Pin	
C1	1000 pF Capacitor, 0402 Pkg.	
U1	HMC641ALC4 Switch	
PCB [2]	600-00782-00-1 Evaluation PCB	

^[1] Reference this number when ordering complete evaluation PCB $\,$

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

^[2] Circuit Board Material: Rogers 4350 or Arlon FR4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Analog Devices Inc.:

HMC641ALC4 HMC641ALC4TR EV1HMC641ALC4