


# LED Displays ~ Seven Segment ~ Numeric



## Dual Digit

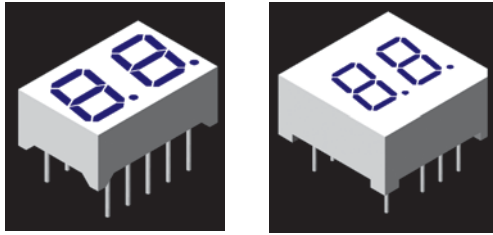


### Features/Options

- ▶ Standard and high brightness chips
- ▶ Intensity grading available
- ▶ Custom sizes at minimal tooling
- ▶ Face and segment off colors in grey and milky white

### Applications/Uses


- ▶ Panel meter displays
- ▶ Time lapsed panels
- ▶ Diagnostic equipment
- ▶ Counter displays

## 0.28" dual digit

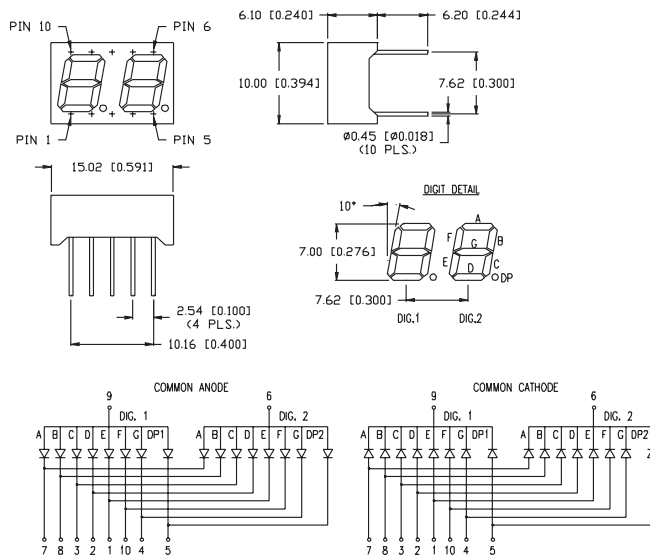

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (common)
LDD-E2802RI	565	2500	2.2	2.6	Green	Anode
LDD-E2804RI	635	2500	2.0	2.5	Red	Anode
LDD-E2806RI	660	8000	1.7	2.2	Red	Anode
LDD-E2802RI-SUG	574	7000	2.2	2.6	Green	Anode
LDD-E2804RI-SI	636	15,000	2.0	2.6	Red	Anode
LDD-E2807RI-USB	470	6000	3.5	4.0	Blue	Anode
LDD-F2802RI	565	2500	2.2	2.6	Green	Cathode
LDD-F2804RI	635	2500	2.0	2.5	Red	Cathode
LDD-F2806RI	660	8000	1.7	2.2	Red	Cathode
LDD-F2802RI-SUG	574	7000	2.2	2.6	Green	Cathode
LDD-F2804RI-SI	636	15,000	2.0	2.6	Red	Cathode
LDD-F2807RI-USB	470	6000	3.5	4.0	Blue	Cathode

## 0.30" dual digit

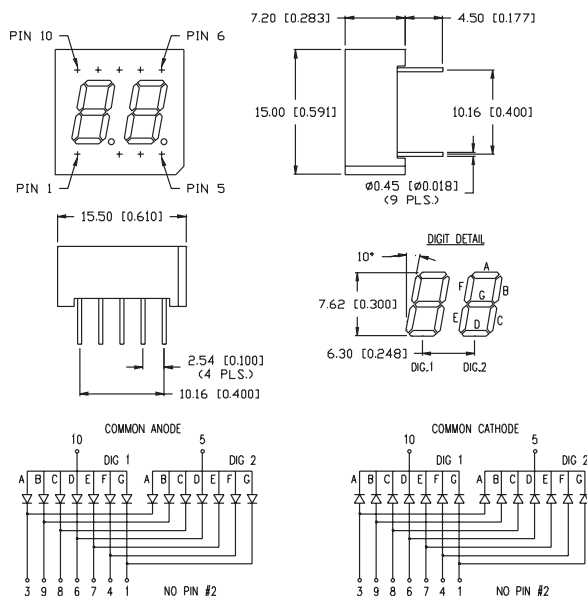

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (common)
LDD-E302NI	565	2500	2.2	2.6	Green	Anode
LDD-E304NI	635	2500	2.0	2.5	Red	Anode
LDD-E306NI	660	8000	1.7	2.2	Red	Anode
LDD-E302NI-SUG	574	7000	2.2	2.6	Green	Anode
LDD-E304NI-SI	636	15,000	2.0	2.6	Red	Anode
LDD-E307NI-USB	470	6000	3.5	4.0	Blue	Anode
LDD-F302NI	565	2500	2.2	2.6	Green	Cathode
LDD-F304NI	635	2500	2.0	2.5	Red	Cathode
LDD-F306NI	660	8000	1.7	2.2	Red	Cathode
LDD-F302NI-SUG	574	7000	2.2	2.6	Green	Cathode
LDD-F304NI-SI	636	15,000	2.0	2.6	Red	Cathode
LDD-F307NI-USB	470	6000	3.5	4.0	Blue	Cathode



USA/Canada +1-800-278-5666  
 Europe +49-6081-964380  
 Asia +886-3-5821124



[www.lumex.com](http://www.lumex.com)



USA/Canada +1-847-359-8904  
 Europe +49-6081-964381  
 Asia +886-3-5821154

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex:](#)

[LDD-F307NI-USB](#) [LDD-F2802RI](#) [LDD-E302NI](#) [LDD-F302NI](#) [LDD-E306NI](#) [LDD-F304NI](#) [LDD-F306NI](#)