


# Large Incandescent Indicators

WITH LIGHT SHIELD LENS CAPS  
FOR MOUNTING IN 1" CLEARANCE HOLE  
FOR 24 TO 250V OPERATION




S-6  
DOUBLE CONTACT  
BAYONET BASE

See lamp ratings  
on page K.

Recognized under the component  
program of Underwriters'  
Laboratories Inc.

75W., 125V.

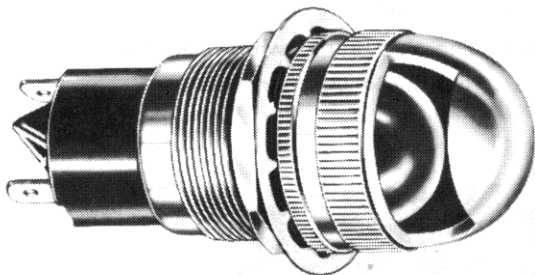

47-3402-2900-301

47 SERIES  
49 SERIES  
50 SERIES  
151 SERIES

## MATERIALS AND FINISHES:

- **Mounting Bushing:** Standard—brass, white nickel finish. Optional—black nickel finish.
- **Light Shield Cap:** Brass, polished chrome finish. Optional—black nickel finish.
- **Knurled Flange Ring:** Standard—brass, polished chrome finish. Optional—black nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals:** Solder — brass, hot tinned. Screws—brass, white nickel finish.
- **Quick Connect—**brass, tinned. Mate with standard female receptacles.
- **Mounting Nut:** Brass, white nickel finish.

## WITH SCREW-ON LENS CAPS

fixed solder	fixed screw	quick connect
47-3402-29-301	47-3202-29-301	47-6602-29-301

## BASE PART NUMBERS

### CAP PART NUMBERS

### COMPLETE ASSEMBLY PART NUMBERS

<p><b>DOMES</b> 47-2900-300 one opening, 3/8"x1"</p>	47-3402-2900-301	47-3202-2900-301	47-6602-2900-301
<p><b>DOMES</b> 49-2900-300 one opening, 1/4"x1"</p>	49-3402-2900-301	49-3202-2900-301	49-6602-2900-301
<p><b>DOMES</b> 50-2900-300 one opening, 1/8"x1"</p>	50-3402-2900-301	50-3202-2900-301	50-6602-2900-301
<p><b>DOMES</b> 151-2900-300 one opening, 9/16"x1"</p>	151-3402-2900-301	151-3202-2900-301	151-6602-2900-301

Part numbers shown in gray are normally  
in inventory at your Dialight Distributor.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Dialight:

[047-6602-29-201](#) [047-4001-29-301](#) [047-2900-300](#) [047-3101-29-300](#) [047-2900-200](#) [047-2900-400](#) [049-2900-300](#)  
[047-3101-29-301](#) [047-3202-29-300](#) [047-3402-29-300](#) [047-4001-29-300](#) [047-6701-29-300](#) [151-2900-300](#) [049-2900-](#)  
[200](#) [151-2900-200](#) [047-3202-29-301](#) [047-6701-29-301](#) [047-3402-29-301](#)