


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1054170333](#)  
**Status:** **Active**  
**Overview:** [Mega-Fit Power Connectors](#)  
**Description:** Mega-Fit Crimp Terminal, Male, Tin (Sn) Plating, 12 AWG, Reel

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 768232000-AS-000 (PDF)</a>
<a href="#">Product Specification 1054171000-PS-000 (PDF)</a>	<a href="#">Packaging Specification 1054170100-000 (PDF)</a>
<a href="#">Product Specification 1054171000-PS-CH-000 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification 1054171000-PS-KO-000 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification 1054171000-PS-SPA-00 (PDF)</a>	

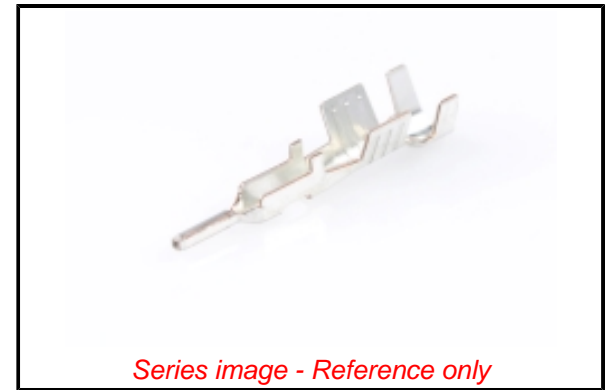

**General**

Product Family	Crimp Terminals
Series	<a href="#">105417</a>
Application	Power, Wire-to-Wire
Crimp Quality Equipment	Yes
Overview	<a href="#">Mega-Fit Power Connectors</a>
Product Name	Mega-Fit
UPC	191130079001

**Physical**

Gender	Male
Material - Metal	High Conductivity Copper
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.360/g
Packaging Type	Reel
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	4.06mm max.
Wire Size AWG	12
Wire Size mm <sup>2</sup>	4.00

**Electrical**

Current - Maximum per Contact	26.0A
Voltage - Maximum	600V AC (RMS)/DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification	768232000-AS-000
Packaging Specification	1054170100-000
Product Specification	1054171000-PS-000, 1054171000-PS-CH-000, 1054171000-PS-KO-000, 1054171000-PS-SPA-00
Sales Drawing	1054170100-000

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[105417 Series](#)

**Use With**

Mega-Fit Plug Housing [105411](#) , [213814](#) ,  
[213815](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Hand Crimp Tool for [2002180900](#)  
Mega-Fit Male and  
Female Terminals,  
12 AWG

Extraction Tool for [2002221200](#)  
Mega-Fit Crimp  
Terminals, 14-16  
AWG

FineAdjust Applicator [639043700](#)  
for Mega-Fit

Male and Female  
Terminals, 12 AWG,  
UL1015  
FineAdjust Applicator 639043800  
for Mega-Fit  
Male and Female  
Terminals, 12 AWG,  
UL1007

This document was generated on 06/18/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[105417-0333](#)