



preci-dip

WWW.PRECIDIP.COM TEL +41 32 421 04 00 SALES@PRECIDIP.COM

PIN CONNECTORS 2 mm


SINGLE ROW / SURFACE MOUNT

"Hard metric" PCB pin connectors, SMD mount.

TECHNICAL SPECIFICATIONS (FOR GENERAL SPECS, SEE PAGE 43)

INSULATOR	Black glass filled polymer LCP-GF30-FR
FLAMMABILITY	UL 94V-0
CONTACT	Brass CuZn36Pb3 (C36000)
CONNECTING PIN Ø	0.47 mm
MECHANICAL LIFE	Min. 500 cycles
RATED CURRENT	3 A
DIELECTRIC STRENGTH	Min. 1'000 V _{RMS}
COPLANARITY	
SMD TERMINATIONS	Max. 0.1 mm (measured on 25 mm long connectors)

For corresponding socket connectors, see pages 57-63.

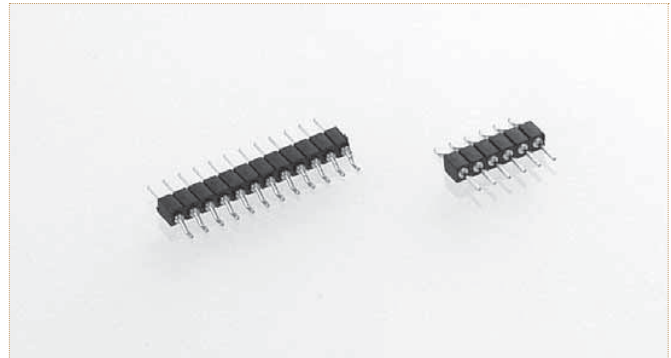

ORDERING INFORMATION ROHS COMPLIANT PARTS

PP PLATING CODE	TERMINATION	CONNECTING PIN
10	0.25 µm gold	0.25 µm gold
80	Tin	Tin

Other plating on request (see page 178 for plating specs).

NNN number of poles. Replace **NNN** with the requested number of poles, e.g. 830-10-**NNN**-40-001101 for a single row version with 8 pins becomes 830-10-**008**-40-001101.



PCB CONNECTORS

Bulk: 830-PP-**NNN**-40-001101 **T & R Packaging*:** 830-PP-**NNN**-40-001191

SMD pin connector, single row, parallel mount

AVAILABILITY FROM 2 to 50 contacts
(standard number of contacts: 50)
For connectors having more than 12 contacts, the coplanarity issue is to be addressed specifically

*Please consult www.precidip.com for availability size of tape, size of reel, number of components per reel and packing units.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Preci-dip:

[830-80-050-40-001101](#) [830-80-049-40-001101](#) [830-80-048-40-001101](#) [830-80-045-40-001101](#) [830-80-047-40-001101](#) [830-80-009-40-001101](#) [830-10-023-40-001101](#) [830-10-035-40-001101](#) [830-10-029-40-001101](#) [830-10-028-40-001101](#) [830-10-027-40-001101](#) [830-10-026-40-001101](#) [830-10-025-40-001101](#) [830-10-024-40-001101](#) [830-10-020-40-001101](#) [830-10-034-40-001101](#) [830-10-046-40-001101](#) [830-10-032-40-001101](#) [830-10-031-40-001101](#) [830-10-030-40-001101](#) [830-10-041-40-001101](#) [830-10-040-40-001101](#) [830-10-039-40-001101](#) [830-10-038-40-001101](#) [830-10-037-40-001101](#) [830-10-036-40-001101](#) [830-10-010-40-001101](#) [830-10-033-40-001101](#) [830-80-046-40-001101](#) [830-10-044-40-001101](#) [830-10-043-40-001101](#) [830-10-042-40-001101](#) [830-10-007-40-001101](#) [830-10-006-40-001101](#) [830-10-005-40-001101](#) [830-10-003-40-001101](#) [830-10-013-40-001101](#) [830-10-012-40-001101](#) [830-10-011-40-001101](#) [830-10-021-40-001101](#) [830-10-009-40-001101](#) [830-10-022-40-001101](#) [830-10-019-40-001101](#) [830-10-018-40-001101](#) [830-10-017-40-001101](#) [830-10-016-40-001101](#) [830-10-015-40-001101](#) [830-10-014-40-001101](#) [830-80-025-40-001101](#) [830-80-024-40-001101](#) [830-10-045-40-001101](#) [830-80-035-40-001101](#) [830-10-008-40-001101](#) [830-10-047-40-001101](#) [830-80-031-40-001101](#) [830-80-030-40-001101](#) [830-80-029-40-001101](#) [830-80-028-40-001101](#) [830-80-027-40-001101](#) [830-80-026-40-001101](#) [830-80-037-40-001101](#) [830-80-036-40-001101](#) [830-80-021-40-001101](#) [830-80-034-40-001101](#) [830-80-022-40-001101](#) [830-80-032-40-001101](#) [830-80-043-40-001101](#) [830-80-042-40-001101](#) [830-80-041-40-001101](#) [830-80-040-40-001101](#) [830-80-039-40-001101](#) [830-80-038-40-001101](#) [830-10-050-40-001101](#) [830-10-049-40-001101](#) [830-10-048-40-001101](#) [830-80-011-40-001101](#) [830-80-033-40-001101](#) [830-80-044-40-001101](#) [830-80-007-40-001101](#) [830-80-006-40-001101](#) [830-80-005-40-001101](#) [830-80-004-40-001101](#) [830-80-003-40-001101](#) [830-80-002-40-001101](#) [830-80-014-40-001101](#) [830-80-013-40-001101](#) [830-80-012-40-001101](#) [830-80-010-40-001101](#) [830-80-023-40-001101](#) [830-80-008-40-001101](#) [830-80-020-40-001101](#) [830-80-019-40-001101](#) [830-80-018-40-001101](#) [830-80-017-40-001101](#) [830-80-016-40-001101](#) [830-80-015-40-001101](#) [830-10-010-40-001191](#) [830-80-006-40-001191](#) [830-80-005-40-001191](#) [830-80-004-40-001191](#)