HLG-120H-C series



■ Features :

- · Constant current design
- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit / Over voltage / Over temperature
- Cooling by free air convection
- Output current adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or 10V PWM signal or resistance)
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.5)



HLG-120H-C350 A: IP65 rated. Constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


MODEL		HLG-120H-C350	HLG-120H-C500	HLG-120H-C700	HLG-120 H-C1050	HLG-120H-C1400					
	RATED CURRENT	350 mA	500mA	700mA	1050mA	1400mA					
ОИТРИТ	CURRENT ACCURACY	±5.0%									
	CONSTANT CURRENT REGION Note.6	215 ~ 430V	150V ~ 300V	107V ~ 215V	74V ~ 148V	54V ~ 108V					
	RATED POWER	150.5W	150W	150.5W	155.4W	151.2W					
	RIPPLE CURRENT	±5%									
	RIPPLE & NOISE	2Vp-p	1.5Vp-p	1Vp-p	1Vp-p	1Vp-p					
	CURRENT ADJ. RANGE	Can be adjusted by internal potentiometer (A type)									
		175 ~ 350mA	250 ~ 500mA	350 ~ 700mA	525 ~ 1050mA	700 ~ 1400mA					
	LINE REGULATION	±1%	±1%	±1%	±1%	±1%					
	SETUP, RISE TIME	2000ms, 80ms / 115VAC at full load 1000ms, 80ms / 230VAC at full load									
	HOLD UP TIME (Typ.)	16ms at full load 230VAC / 115VAC									
	VOLTAGE RANGE Note.2	90 ~ 305VAC 127VDC ~ 431VDC									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.96/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)									
INPUT	EFFICIENCY (Typ.)	94%	94%	94%	94%	93.5%					
	AC CURRENT (Typ.)	1.6A / 115VAC 0.8	3 A / 230VAC 0.7A /	277VAC							
	INRUSH CURRENT (Typ.)	COLD START 50A(twidth=600µs measured at 50% Ipeak) at 230VAC									
	LEAKAGE CURRENT	<0.75mA/277VAC									
	SHORT CIRCUIT	Constant current limiting,	recovers automatically af	er fault condition is remov	/ed						
	AV	475~495V	335 ~ 355V	240~260V	165 ~ 175V	120 ~ 130V					
PROTECTION	N OVER VOLTAGE Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery										
		85°C ±10°C (RTH2)									
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down									
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	10 ~ 95% RH non-condensing									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
	SAFETY STANDARDS Note.3	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13, EN62384 independent, IP65 or IP67 approved									
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC									
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/70% RH									
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (≥50% load); EN61000-3-3									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, heavy industry level (surge L,N-FG: 4KV), criteria A									
	MTBF	191.1K hrs min. MIL-HDBK-217F (25°C)									
OTHERS DIMENSION 220*68*38.8mm (L*W*H)											
	PACKING	1.04Kg; 12pcs/13.5Kg/0.8	BCUFT								
NOTE	Derating may be needed ur Safety and EMC design ref The power supply is consid complete installation, the fir Refer to warranty statemen Constant current operation	Illy mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Illy mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Inder low input voltages. Please check the static characteristics for more details. It is er to EN60598-1, CNS15233, GB7000.1. It is ered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the nal equipment manufacturers must re-qualify EMC Directive on the complete installation again. It is expected in the suitable operation region for LED related applications, but please requirements for some specific system design.									





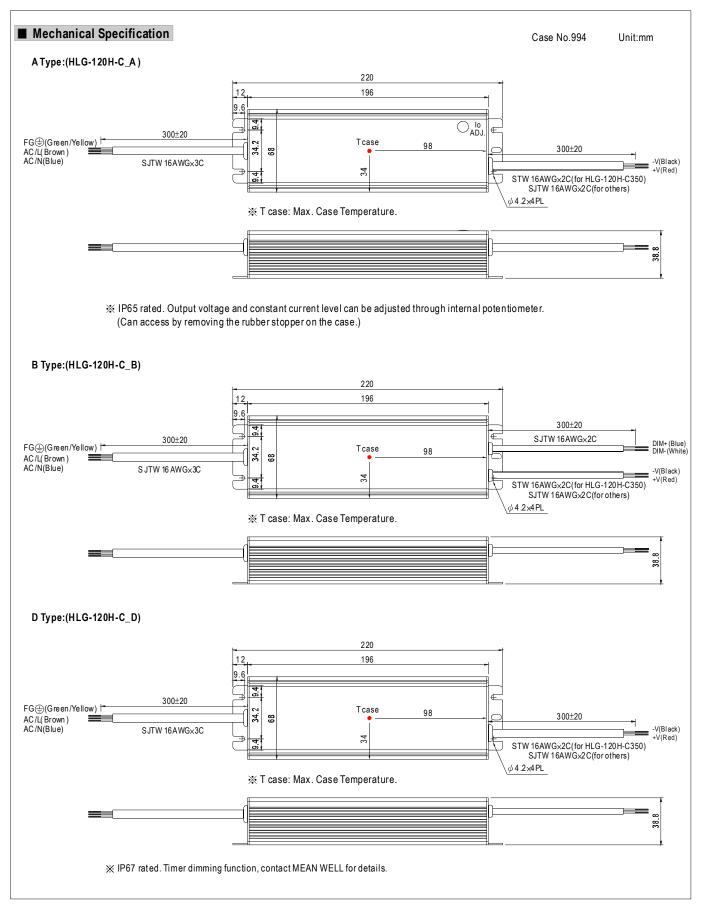




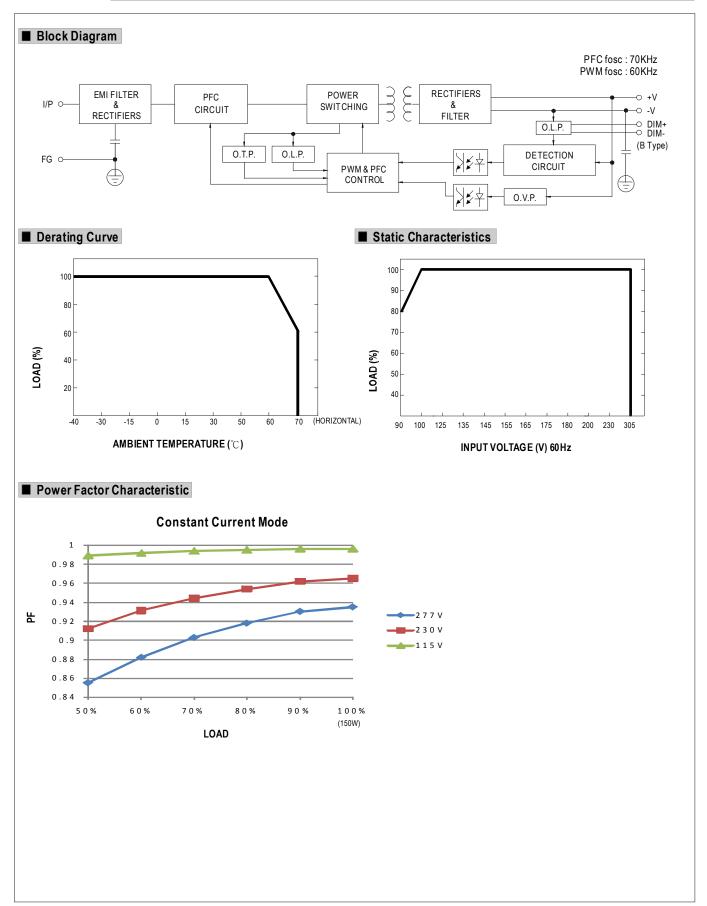




■ EFFICIENCY vs LOAD (HLG-120H-C700A Model)

HLG-120H-C series possess superior working efficiency that up to 94% can be reached in field applications.

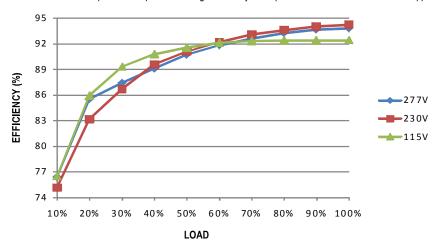

■ DRIVING METHODS OF LED MODULE


 $A typical \, LED \, power \, supply \, may \, w \, ork \, in \, "constant \, current \, mode \, (CC)" \, to \, drive \, the \, LEDs. \\ Mean \, Well's \, LED \, power \, supply \, with \, CC \, characteristic \, can \, be \, operated \, at \, CC \, mode \, (direct \, drive).$

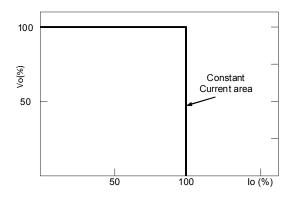

Typical LED power supply I-V curve



■ DIMMING OPERATION

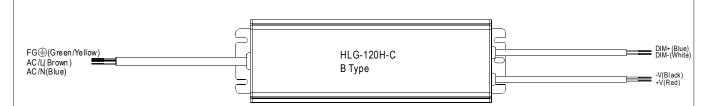

- \times Please DO NOT connect "DIM-" to "-V".

Percentage of rated current

※ Reference resistance value for output current adjustment (Typical)

Resistance value	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90ΚΩ	100K Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%
× 1∼10V dimming function for output current adjustment (Typical)											
Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10 V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%
※ 10V PWM signal for output current adjustment (Typical): Frequency range: 100 Hz ~ 3KHz											
Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN

40%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

50%

60%

70%

80%

90%

100%

102%~108%


*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

20%

30%

Dimming connection diagram for turning the lighting fixture ON/OFF:

10%

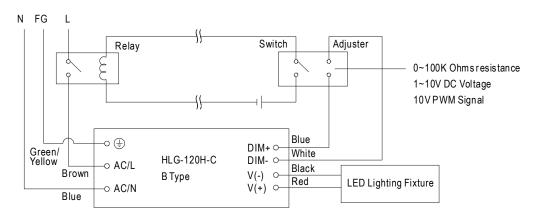

Using a switch and relay can turn ON/OFF the lighting fixture.


- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10V dc or 10V PWM signal between DIM+ and DIM-.
- 2.The LED lighting fixture can be turned ON/OFF by the switch.



■ WATERPROOF CONNECTION


Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-120H-C to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)			
M12	00	000		
IVI 12	4-PIN	5-PIN		
	5A/P IN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)			
M 15	(o)			
IVI IS	2-PIN			
	12A/P IN			
Order No.	M15-02			
Suitable Current	12A max.			



O Cable Joiner

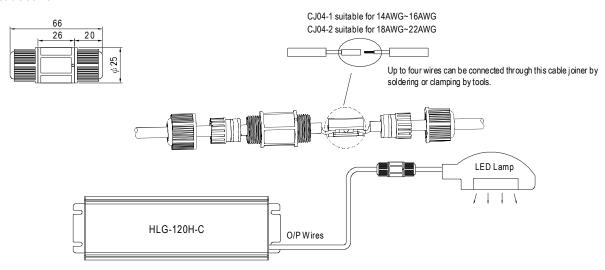

 $\ensuremath{\mathsf{XCJ04}}$ cable joiner can be purchased independently for user's own assembly.

MEAN WELL or der No.: CJ 04-1, CJ 04-2.