#### **Features**

- All ceramic epoxy sealed SMD package
- Low in height, suitable for thin equipment
- Tight tolerance and stability available

### **Applications**


- High density applications
- Modem, communication and test equipment



General Specifications	
Frequency Range	8.000 to 48.000MHz (Fundamental)
Frequency Tolerance at 25°C	$\pm 20$ to $\pm 50$ ppm ( $\pm 30$ ppm standard)
Frequency Stability over Temperature Range	See Stability vs. Temperature Table
Storage Temperature	-55 to +125°C
Aging per Year	±5ppm max.
Load Capacitance CL	10 to 32pF and Series Resonance
Shunt Capacitance C <sub>0</sub>	7.0pF max.
Equivalent Series Resistance (ESR)	See ESR Table
Drive Level	100µW typ. (500µW max)
Insulation Resistance (M $\Omega$ )	500 at 100Vdc ±15Vdc

Equivalent Series Resistance (ESR)							
Frequency Range - MHz	Mode of Operation						
8.000 to 10.000	100	Fundamental					
10.000 to 12.000	80	Fundamental					
12.000 to 16.000	60	Fundamental					
16.000 to 48.000	30	Fundamental					

Frequency Stability vs. Temperature								
Operating Temperature	±20ppm	±30ppm	±50ppm					
-20 to +70°C	0	0	0					
-40 to +85°C	0	•	0					
		·	• standard O available					

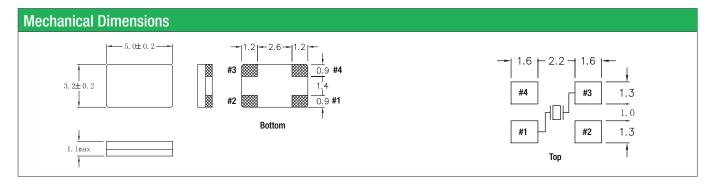


Part Numbering Guide									
Qantek Code	Package	Nominal Frequency (in MHz)	Vibration Mode	Load Capacitance	Operating Temperature Range	Frequency Tolerance	Frequency Stability	Packaging	
Q = Qantek	C5CA = 3.2x5.0 4-Pad SMD	7 digits including the decimal point (f.ie. 12.0000)	F = AT-Fund	S = Series  12 = 12pF  18 = 18pF  20 = 20pF etc.	A = -20 to +70°C B = -40 to +85°C	2 = ±20ppm <b>3 = ±30ppm</b> 5 = ±50ppm	2 = ±20ppm 3 = ±30ppm 5 = ±50ppm	M = 250pcs Tape&Reel R = 1000pcs Tape&Reel	
Example: QC5CA12.0000F12B33R bold letters = recommended standard specification									




# **QANTEK Technology Corporation**

Phone: +1 877-227-0440 (tollfree) Fax: +1 877-227-0440 (tollfree) www.qantek.com info@qantek.com

## **Tape and Reel Dimensions**

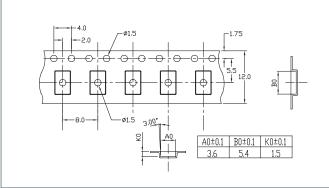

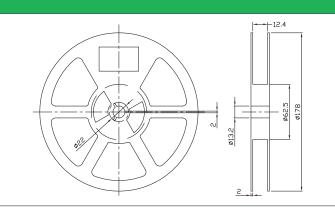


### **Marking Code Guide**

Contains frequency, Qantek manufacturing code, production code (month and year) and load capacitance.

Codes			Year Codes					Load Capacitance Code in pF					
A	July	G	2017	7	2018	8	2019	9		pF	PN Code	pF	PN Code
В	August	Н	2020	0	2021	1	2022	2		12	Α	20	F
С	September	1	2023	3	2024	4	2025	5		18	В	22	G
D	October	J								8	С	30	н
E	November	К								10	D	32	I
F	December	L								16	E	S	S
	A B C	AJulyBAugustCSeptemberDOctoberENovember	AJulyGBAugustHCSeptemberIDOctoberJENovemberK	AJulyG2017BAugustH2020CSeptemberI2023DOctoberJENovemberK	AJulyGBAugustHCSeptemberIDOctoberJENovemberK	A         July         G         2017         7         2018           B         August         H         2020         0         2021           C         September         I         2023         3         2024           D         October         J         September         K         September         K	A         July         G         2017         7         2018         8           B         August         H         2020         0         2021         1           C         September         I         2023         3         2024         4           D         October         J         2         5         5         5         5           E         November         K         K         5	A         July         G         2017         7         2018         8         2019           B         August         H         2020         0         2021         1         2022           C         September         I         2023         3         2024         4         2025           D         October         J         J         2023         3         2024         4         2025	A       July       G         B       August       H         C       September       I         D       October       J         E       November       K	A       July       G       2017       7       2018       8       2019       9         B       August       H       2020       0       2021       1       2022       2         C       September       I       2023       3       2024       4       2025       5         D       October       J       September       K       September       K       September       September	A       July       G       2017       7       2018       8       2019       9       pF         B       August       H       2020       0       2021       1       2022       2       12         C       September       I       2023       3       2024       4       2025       5       18         D       October       J       J       J       J       2023       3       2024       4       2025       5       18         E       November       K       K       K       K       10       10       10	A       July       G       2017       7       2018       8       2019       9         B       August       H       2020       0       2021       1       2022       2         C       September       I       2023       3       2024       4       2025       5       18       B         D       October       J       J       J       2025       5       10       10       D         E       November       K       Notember       K       K       K       10       D	A       July       G       2017       7       2018       8       2019       9         B       August       H       2020       0       2021       1       2022       2         C       September       I       2023       3       2024       4       2025       5         D       October       J       J       J       J       2025       5       18       B       22         R       November       K       K       J       J       2025       5       18       J       20

Example: First Line: 12.000 (Frequency) Second Line: QA8A (Qantek - January - 2018 - 12 pF)

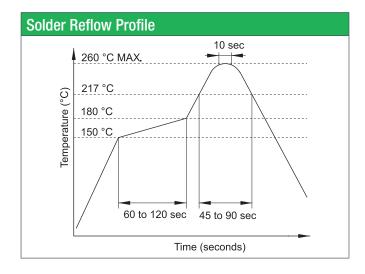

Environmental Specifications						
Mechanical Shock	MIL-STD-202, Method 213, C					
Vibration	MIL-STD-202, Method 201 & 204					
Thermal Cycle	MIL-STD, Method 1010, B					
Gross Leak	MIL-STD-202, Method 112					
Fine Leak	MIL-STD-202, Method 112					

All specifications are subject to change without notice.



## **QANTEK Technology Corporation**

Phone: +1 877-227-0440 (tollfree) Fax: +1 877-227-0440 (tollfree)

www.qantek.com info@qantek.com