



This compact stringpot provides the ultimate in ease-of-use and flexibility. This sensor fits in small spaces, doesn't need perfect alignment, mounts in just about any direction imaginable and has a unique circuit that lets the user choose 4-20mA or 0-10Vdc output on the fly.

The SPD comes in 4 different stroke ranges up to 50 inches and is constructed with a rugged polycarbonate body sealed against IP67 (wet) environments for both indoor and outdoor applications. Every unit ships with a stainless steel mounting bracket that lets the user easily point the measuring cable in the direction needed.

High value and economical price makes this sensor the perfect choice for the OEM and single-piece user alike. Customer specific designs available for the OEM, please contact factory for more information.

SPD

Compact, High-Performance String Pot Dual Ouput to 50"

Comes With Both 4...20mA and 0...10V Output
Rugged IP67 Polycarbonate Enclosure
Mounting Bracket & Sensor Cover Adjusts for Easy Installation
IN STOCK for Quick Delivery!

Specifications

Full Stroke Range Options 0-4.75 to 0-50 inches

User Selectable Output Signal 4...20 mA (2-wire) / 0...10 Vdc

Input Voltage, 4...20 mA option 8-40 VDC
Input Voltage, 0...10 Vdc option 12-32 VDC

Accuracy see ordering information

Repeatability .05% FS.

Resolution essentially infinite

Measuring Cable .019-inch dia. nylon-coated stainless steel

Sensor plastic-hybrid precision potentiometer

Cycle Life see ordering information

Electrical Connection M12 connector (mating plug included)


Enclosure glass-filled polycarbonate

Environmental IP 67


Operating Temperature -40° to 160° F (-40° to 70° C)


Weight (includes sensor, .4 lbs (.19 kg) bracket and connector)

Output Signal

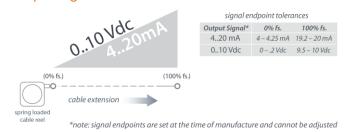


Electrical Connection

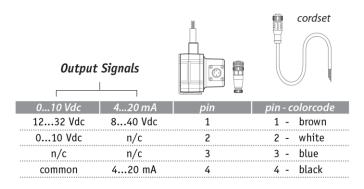


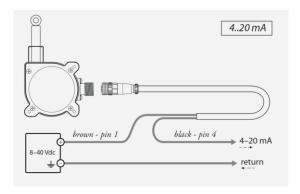


field installable connector (included)




cordset, part no. 9036810-0040 (optional)




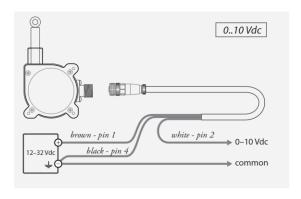


Mounting Options

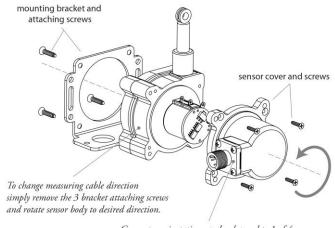

Connector orientation can be changed to 1 of 4 positions. Simply remove the 4 cover screws and rotate cover and replace screws.

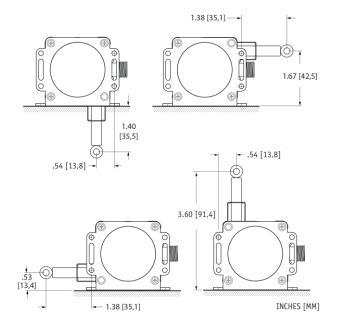


SPD-xx-3 w/o Mounting Bracket

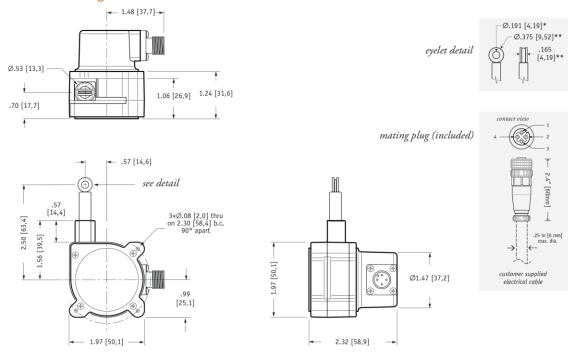


DIMENSIONS ARE IN INCHES [MM] tolerances are 0.04 IN. [1,0 MM] unless otherwise noted.

SPD-xx-3 w/ Mounting Bracket

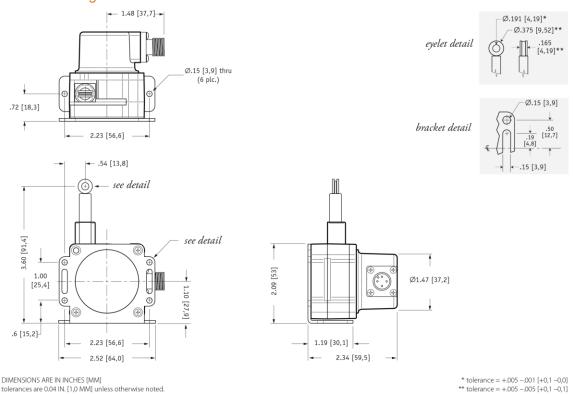


^{*} tolerance = +.005 -.001 [+0,1 -0,0] ** tolerance = +.005 -.005 [+0,1 -0,1]

Ordering Information



includes sensor, mounting bracket & mating connector.

	full stroke		max. ca	measuring able tension	
Part Number	range	accuracy	acceleration		cycle life
SPD-4-3	4.75 in (120 mm)	1.00%	11 g	11.5 oz. (3,2 N)	2.5M
SPD-12-3	12.5 in (317 mm)	.25%	11 g	13.9 oz. (3,7 N)	500K
SPD-25-3	25 in (635 mm)	.25%	11 g	11.5 oz. (3,2 N)	500K
SPD-50-3	50 in (1270 mm)	.25%	11 g	11.5 oz. (3,2 N)	250K



Optional Cordset

------ Part No. -----

 $9036810\text{-}0040 \text{ for short-run connections, an optional} \\ \text{13-ft. cordset with 4-pin M12 connector}$

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity company 20630 Plummer Street Chatsworth, CA 91311 Tel +1 800 423 5483 Tel +1 818 701 2750

Fax +1 818 701 2799 info@celesco.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

SPD 12/01/2015