

Touch-Safe Fuseholder, 35 mm DIN-Rail, 10.3 x 38 mm, 1000 VDC



1000 VDC · 600 VAC/DC · 30 A (UL/CSA)



Description

- Mountable on 35 mm DIN-Rail
- Easy installation and removal of fuses
- For Fuses up to 100 kA Interrupting Rating

Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals

- UL File Number: E39328

Applications

- Combiner Boxes in Photovoltaic Systems

References

General Product Information
Fuseholder to ASO 10.3x38


Weblinks

Approvals, RoHS, CHINA-RoHS, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Fuse-Link	10.3 x 38 mm
Mounting	DIN-Rail Mounting
Terminal	Press plate: 2 - 10 mm ² / AWG #8 - 14 (stranded), 2 - 6 mm ² , AWG #10 - 14 (solid), 2 Nm / 17.7 lb-in (max. torque)
Rated Voltage	1000VDC (Self certified), 600 VAC/DC (UL/CSA)
Rated Current	30A (UL/CSA), 30A (UL/CSA)
Degree of Protection	IP 20
Admissible Ambient Air Temp.	-40°C to 130°C
Material: Socket	Thermoplastic, UL 94V-2
Unit Weight (Socket/Cap)	54 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	Type, Tech. Information

Abmessungen

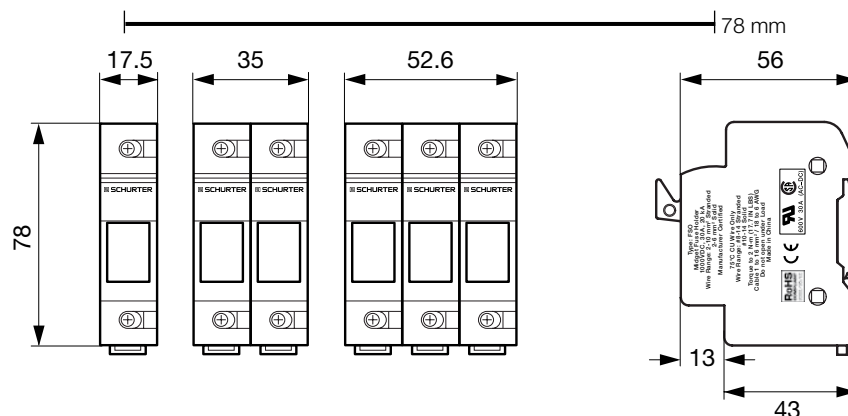

Do not open under load

Variants

Holder	Remark	Order Number
●	1 Pole	0091.0001
●	2 Poles	0091.0002
●	3 Poles	0091.0003

Packaging Unit	0091.0001	Bulk (10 pcs.)
	0091.0002	Bulk (5 pcs.)
	0091.0003	Bulk (4 pcs.)
