



Series 800 Mighty Mouse UN Mating Thread Plug 800-006 Thru 800-009 Ordering Information







Glenair's Smallest Mighty Mouse Connector has compact size and rugged design for hostile environments. UN mating thread. Connector shells are machined aluminum or stainless steel. Supplied with crimp contacts, packaged separately. Terminate contacts with standard M22520 tools. Metal clips inside the connector body lock contact into place. Contacts are removable. Fluorosilicone seals and rear grommet protect connector from water ingress. Choose hex or knurled coupling nut. Terminate cable shield directly to connector body with Band-Master™ ATS strap, or choose rear accessory thread to attach optional cable clamp or backshell. Available in shell sizes 5 through 12 in 36 contact arrangements.

How To Order

Sample Part Number	800-006	-06	M	6-7	P	N
Series (See Table I)	800-006 = Hex Plug with Banding Platform 800-007 = Hex Plug with Accessory Thread 800-008 = Plug with Band Platform 800-009 = Plug with Accessory Thread					
Shell Style	-06 = Standard Coupling Nut -16 = Coupling Nut with Anti-Decoupling Wave Spring					
Shell Material and Finish	C = Aluminum / Black Anodize (Non-Conductive) RoHS Compliant M = Aluminum / Electroless Nickel RoHS Compliant NF = Aluminum / Cadmium with Olive Drab Chromate ZNU = Aluminum / Zinc-Nickel with Black Chromate MT = Aluminum / Nickel-PTFE RoHS Compliant Z1 = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arrangement	See Contact Arrangements page C-2					
Contact Type	Connector supplied with crimp contacts P = Pin S = Socket	Connector supplied without contacts A = Pin Connector B = Socket Connector	Connector supplied with 30 AWG crimp contacts G = Pin H = Socket			
Shell Key Positions (See Table II)	N = Normal X = Pos. X Y = Pos. Y Z = Pos. Z					

Table I: Series

800-006	800-007	800-008	800-009
			
Hex Plug with Banding Platform	Hex Plug with Accessory Thread	Knurled Round Plug with Band Platform	Knurled Round Plug with Accessory Thread

Dimensions in Inches (millimeters) are subject to change without notice.




Series 800 Mighty Mouse with UN Mating Thread Contact Arrangements, Keyway Positions and Jam Nut Panel Cutout Dimensions

C

Contact Arrangements					
Contact Arr.	No. of Contacts				
	#23	#20	#20HD	#16	#12*
5-3	3				
6-1				1	
6-23			3		
6-4	4				
6-6	6				
6-7	7				
7-1					1
7-25			5		
7-10	10				
8-2				2	
8-13	13				
8-28			8		
8-200	4	2			
9-4				4	
9-210			10		
9-19	19				
9-200	4			2	
9-201	8	2			
10-2					2
10-5				5	
10-26	26				
10-200	12				1
10-201	4				2
10-202	8			2	
12-2					2
12-3					3
12-7				7	
12-220			20		
12-37	37				
12-200	6				2
12-201	10				2
12-202	20				
12-203	12				
12-204	12				2
12-205	4				4


*Arrangements with #12 contacts available with keyed Twinax contacts. Use mode code -688

Mating Face View of Pin Connector (socket connector numbers are reversed)

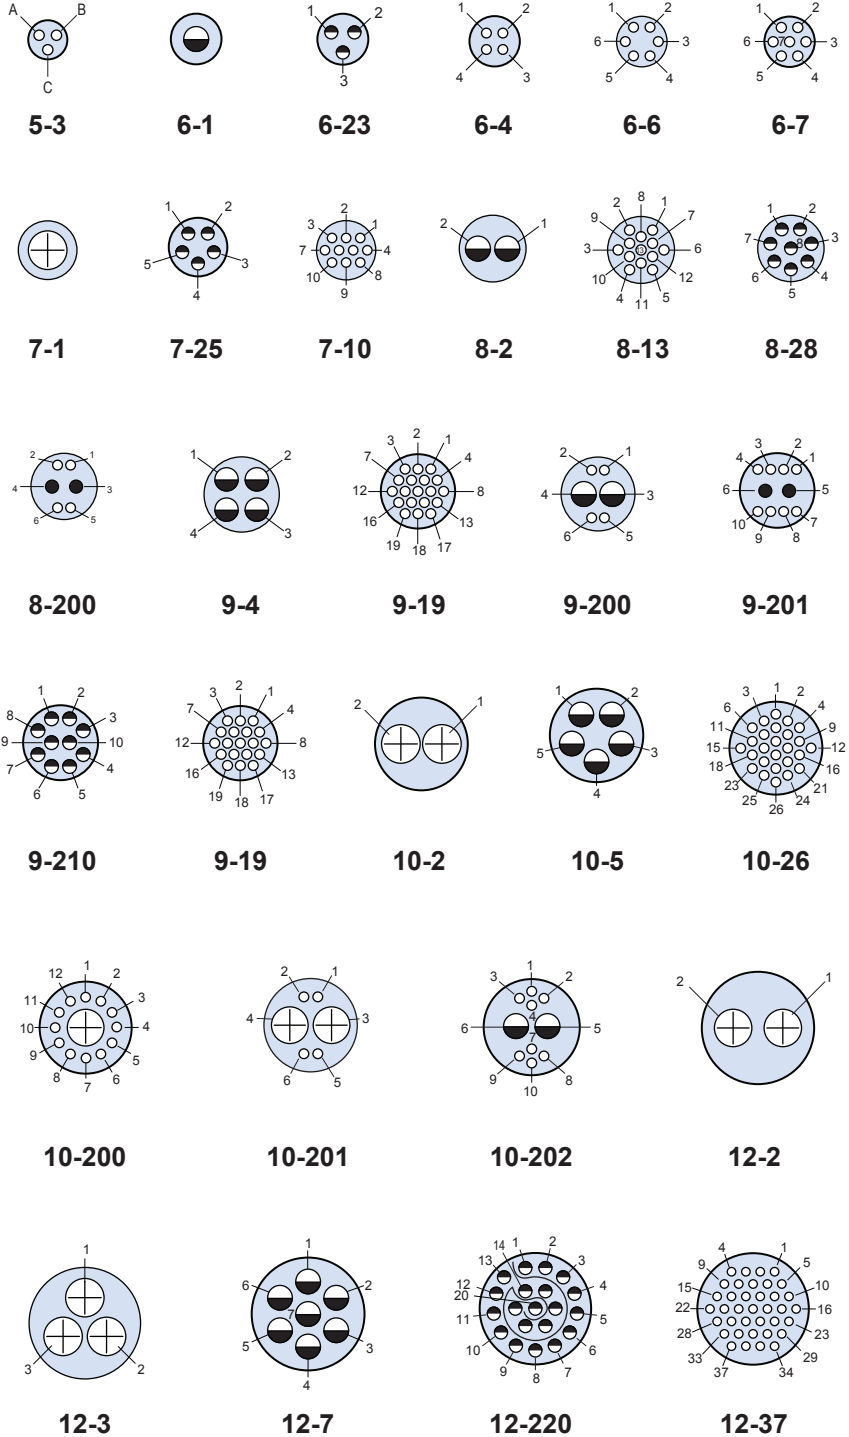

Contact Legend

#23◐ #20HD◐ #20● #16◑ #12⊕

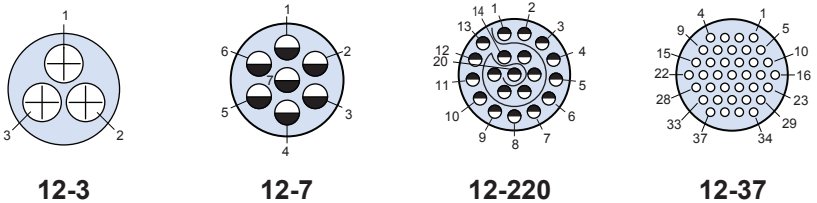


Dimensions in Inches (millimeters) are subject to change without notice.

Series 800 Mighty Mouse with UN Mating Thread Contact Arrangements, Keyway Positions and Jam Nut Panel Cutout Dimensions




Series 800


Mating Face View of Pin Connector (socket connector numbers are reversed)




12-200




12-201




12-202



12-203



12-204



12-205

					Series 800 Key Positions	
Shell Size	N	X	Y	Z		
5	150°	140°	130°	120°		
6						
7						
8						
9						
10						
12						
<p>Shell size 5 and 6: master key is located at top dead center for normal (N) position.</p> <p>Shell size 7 thru 12: master key is rotated 90° from TDC for normal position.</p>					Shell Size 5 and 6 Key Position	Shell Size 7 thru 12 Key Position

C

Jam Nut Panel Cut Out					
Shell Size	Ø M		N Flat		
	in	mm	in	mm	
5	.318	8.08	.302/.298	7.67/7.56	
6	.386	9.80	.365/.361	9.27/9.17	
7	.449	11.40	.429/.424	10.90/10.77	
8	.510	12.95	.486/.482	12.34/12.24	
9	.574	14.58	.543/.539	13.79/13.69	
10	.635	16.13	.617/.613	15.67/15.57	
12	.760	19.30	.725/.721	18.41/18.31	

Dimensions in Inches (millimeters) are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[800-006-06M6-7PN](#) [800-006-06M8-13SN](#) [800-006-06NF6-4PN](#) [800-006-06NF6-7PN](#) [800-006-16M9-19SN](#) [800-006-16Z16-4PN](#) [800-006-16Z19-19SN](#) [800-008-06M12-37PN](#) [800-008-06M6-4PN](#) [800-008-06M7-10SN](#) [800-008-06M9-19PN](#) [800-008-06NF6-4PN](#) [800-008-06NF9-19SN](#) [800-008-16Z16-4PN](#) [800-008-16Z16-7PN](#) [800-009-06M10-26SN](#) [800-009-06M5-3SN](#) [800-009-06M9-19PN](#) [800-009-16M12-37PN](#) [800-009-16M6-7PN](#) [800-006-06M7-10PN](#) [800-006-06ZNU7-10SN](#) [800-007-16Z15-3SN](#) [800-009-06NF5-3SN](#) [800-009-06NF7-10SN](#) [800-009-16NF8-13PN](#) [800-009-16NF9-19SN](#) [800-007-06NF6-7PN](#) [800-006-06M9-4PN](#) [800-006-06NF5-3PN](#) [800-006-06NF6-4SN](#) [800-006-06NF7-10SN](#) [800-006-06NF7-1SN](#) [800-006-06NF9-19PN](#) [800-006-06NF9-4SN](#) [800-006-06Z16-4PN](#) [800-006-16M12-2SN](#) [800-006-16M5-3SN](#) [800-006-16M6-4SN](#) [800-006-16M7-10SN](#) [800-006-16M8-13SN](#) [800-006-16M9-4PN](#) [800-006-16M9-4SN](#) [800-006-16NF12-2SN](#) [800-006-16NF6-1PN](#) [800-006-16NF6-7SN](#) [800-006-16NF7-10PN](#) [800-006-16NF7-10SN](#) [800-006-16NF9-19PN](#) [800-006-16NF9-4SN](#) [800-007-16M6-4PN](#) [800-008-06ZNU6-7SN](#) [800-008-16M8-13SN](#) [800-008-16M9-4SN](#) [800-008-16NF9-4PN](#) [800-008-16Z17-10SN](#) [800-009-06M12-37PN](#) [800-009-06M9-19SN](#) [800-009-06Z16-7PN](#) [800-009-16M10-26SN](#) [800-009-16M5-3PN](#) [800-009-16M6-4PN](#) [800-009-16M8-13PN](#) [800-009-16M8-13SN](#) [800-009-16NF12-2SN](#) [800-009-16NF9-4PN](#) [800-006-06Z16-7SX](#) [800-006-16NF9-19SX](#) [800-007-06M6-4SN](#) [800-007-06NF8-13SN](#) [800-007-16M9-19SN](#) [800-008-06M6-4PY](#) [800-009-06C9-19SN](#) [800-009-06M6-4PY](#) [800-009-06M6-4PZ](#) [800-009-06NF6-7PN](#) [800-009-06Z16-4SN](#) [800-009-16M6-4SN](#) [800-009-16M7-1PN](#) [800-009-16M9-4SN](#) [800-008-16M6-4SX](#) [800-009-16NF5-3PN](#) [800-007-06M7-10PN](#) [800-008-06Z16-4SN](#) [800-007-06M7-10SN](#) [800-006-06M6-7PX](#) [800-006-06Z18-13SN](#) [800-006-06M6-4PX](#) [800-007-06NF12-37SN](#) [800-006-06M5-3PX](#) [800-007-06M6-4PN](#) [800-009-06NF12-37PN](#)