#### AEACAC195013-S915



195.0 x Ø12.9 mm **RoHS/RoHS II Compliant** 

MSL = 1

#### **Features**

- 915 MHz LPWA/ISM antenna
- Linear polarization
- Gain of 3 dBi
- VSWR < 2.5

## **Applications**

- LPWA/LoRa/SigFox applications
- ISM applications
- IoT
- M2M
- Remote technology/monitoring
- Network devices
- Smart buildings
- Smart city
- Agriculture/environment
- Consumer tracking

#### **Electrical Specifications**

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency		915		MHz	
VSWR			2.5		
Polarization	Linear				
Impedance		50		Ω	
Gain		3		dBi	

#### **Mechanical Characteristics**

Parameters	Description
Mounting	Connector
Connector	SMA Male

#### **Environmental Characteristics**

Parameters	Description		
Operating temperature	-40°C to +85°C		
Vibration	10 to 55 Hz with 1.5 mm amplitude 2 hours		




#### AEACAC195013-S915



195.0 x Ø12.9 mm RoHS/RoHS II Compliant MSL = 1

### **Dimensions**

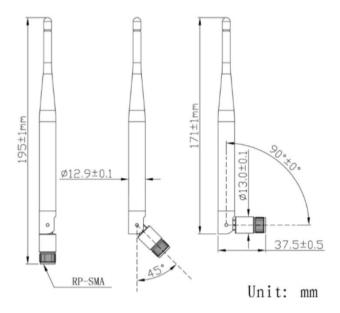

# **Product Image**






#### AEACAC195013-S915



195.0 x Ø12.9 mm RoHS/RoHS II Compliant MSL = 1


#### **VSWR**

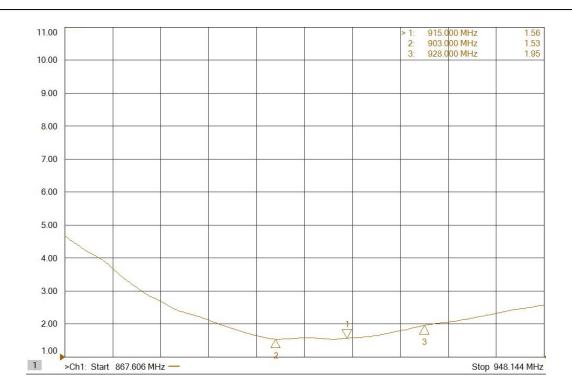


#### Radiation Pattern: 915 MHz

#### 2D - Pattern

#### **Horizontal Plane**



#### **Vertical Plane**





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 01.25.2019

ABRACON IS ISO9001-2015 CERTIFIED


#### AEACAC195013-S915



195.0 x Ø12.9 mm **RoHS/RoHS II Compliant** MSL = 1

#### Radiation Pattern: 915 MHz

3D - Pattern

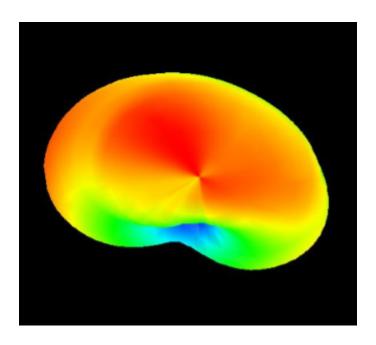

Frequency (MHz)	Efficiency	Gain (dBi)
915	0.64	3.22

#### **Packaging**

The package of dimension 49.5 x 22.5 x 27.0 cm has 500 pcs and weighs about 13 Kg.

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

