
## Pomona®

### Model 1297 BNC (Female) To Standard ¼" Two Conductor Phone Plug

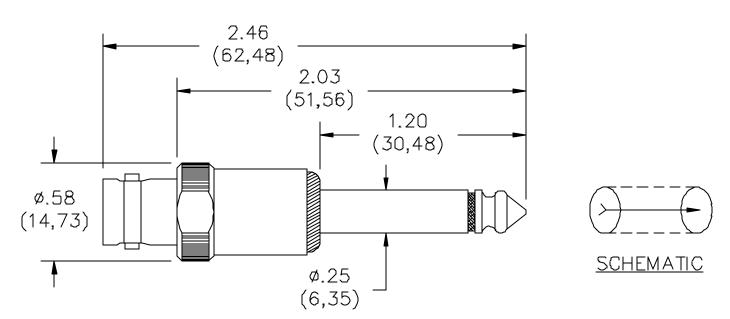

#### **FEATURES:**

- Enables interconnection between telephone equipment and BNC based test instruments.
- Readily adapters standard phone jacks for BNC Cables.
- BNC (Female) contact is gold plated Beryllium Copper for noise free connection.
- Adapter is tarnish resistant for good lab appearance.

#### **MATERIALS:**

BNC (Male): Body – Brass, Tarnish Resistant

Center Contact: Beryllium Copper, Gold Plated

Dielectric: PTFE Handle: Brass, Nickel Plated

Phone Plug (Two Conductors): Brass, Nickel Plated

#### **RATINGS:**

Operating Voltages: 500 VRMS

Operating Temperature: +125°C (+257°F)

Impedance: 50 Ohms

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060

# Pomona®

## Model 1297 BNC (Female) To Standard ¼" Two Conductor Phone Plug

**ORDERING INFORMATION:** Model 1297

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

1297 1297#