



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phon: (818) 701-4933 Fax: (818) 701-4939

ES1A-L **THRU** ES1J-L

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information) Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Built-in strain relief
- Super fast switching speed under 35ns
- Marking: Cathode band and type number (No '-L' Suffix)
- Halogen free available upon request by adding suffix "-HF"

aximum Ratings

- Operating Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C
- Maximum Thermal Resistance: 35°C/W Junction To Lead

85°C/W Junction To Ambient


MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
ES1A-L	50V	35V	50V
ES1B-L	100V	70V	100V
ES1D-L	200V	140V	200V
ES1G-L	400V	280V	400V
ES1J-L	600V	420V	600V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward	I _{F(AV)}	1.0A	T _L = 125°C
Current			
Peak Forward Surge	I _{FSM}	30A	8.3ms, half sine
Current			
Maximum			
Instantaneous			
Forward Voltage			
ES1A-L-ES1D-L	V_{F}	.95V	$I_{FM} = 1.0A;$
ES1G-L		1.25V	
ES1J-L		1.70V	
Maximum DC			
Reverse Current At	I_R	5μΑ	T _A = 25°C
Rated DC Blocking		80μΑ	T _A = 100°C
Voltage		,	
Maximum Reverse	T_{rr}	35ns	$I_F=0.5A, I_R=1.0A,$
Recovery Time			I _{rr} =0.25A
Typical Junction	CJ	15pF	Measured at
Capacitance		•	1.0MHz, V _R =4.0V

Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7.

1 Amp Super Fast **Recovery Rectifier** 50 to 600 Volts

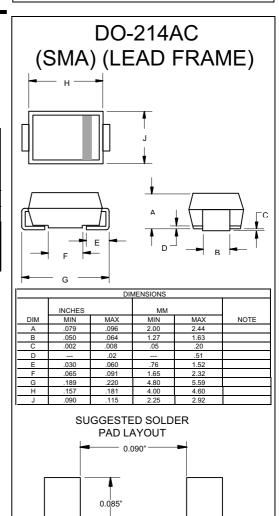

0.070"

ES1A-L thru ES1J-L



FIG.1-TYPICAL FORWARD


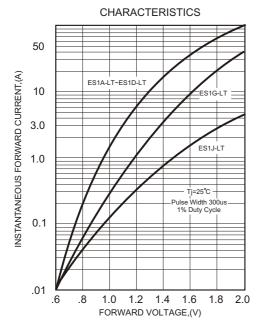


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE

RECOVERY TIME CHARACTERISTICS

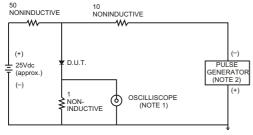

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF

2. Rise Time= 10ns max., Source Impedance= 50 ohms




FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

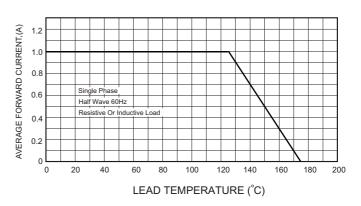


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


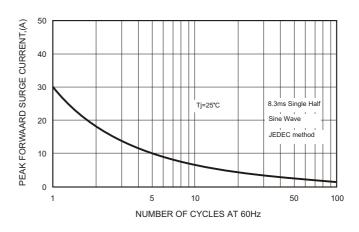


FIG.5-TYPICAL JUNCTION CAPACITANCE



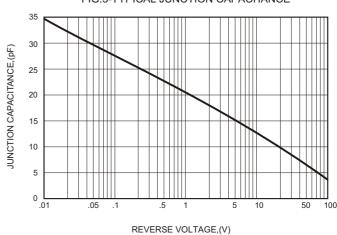

Ordering Information:

Device	Packing	
ES1A-LTP~ES1J-LTP	Tape&Reel: 5Kpcs/Reel	

Note: Adding "-HF" suffix for halogen free, eg. ES1A-LTP- HF~ES1J-LTP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Micro Commercial Components (MCC)}}{\text{ES1A-LTP} \ \text{ES1B-LTP} \ \text{ES1D-LTP} \ \text{ES1J-LTP}}$