

Is Now Part of



## **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="https://www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="https://www.onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an equif prese



January 2008

## 74AC245, 74ACT245 Octal Bidirectional Transceiver with 3-STATE Inputs/Outputs

### Features

- I<sub>CC</sub> and I<sub>OZ</sub> reduced by 50%
- Non-inverting buffers
- Bidirectional data path
- A and B outputs source/sink 24mA
- ACT245 has TTL-compatible inputs

## **General Description**

The AC/ACT245 contains eight non-inverting bidirectional buffers with 3-STATE outputs and is intended for bus-oriented applications. Current sinking capability is 24mA at both the A and B ports. The Transmit/Receive ( $T/\overline{R}$ ) input determines the direction of data flow through the bidirectional transceiver. Transmit (active-HIGH) enables data from A ports to B ports; Receive (active-LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a HIGH Z condition.


### **Ordering Information**

		•
Order Number	Package Number	Package Description
74AC245SC	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74AC245SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74AC245MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
74AC245PC	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide
74ACT245SC	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74ACT245SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
74ACT245MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide
74ACT245MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
74ACT245PC	N20A	20-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

All packages are lead free per JEDEC: J-STD-020B standard.


## **Connection Diagram**




### **Pin Description**

Pin Names	Description
ŌĒ	Output Enable Input
T/R	Transmit/Receive Input
A <sub>0</sub> -A <sub>7</sub>	Side A 3-STATE Inputs or 3-STATE Outputs
B <sub>0</sub> –B <sub>7</sub>	Side B 3-STATE Inputs or 3-STATE Outputs

## Logic Symbol



IEEE/IEC



## **Truth Table**

Inputs		
OE	T/R	Outputs
L	L	Bus B Data to Bus A
L	Н	Bus A Data to Bus B
Н	Х	HIGH-Z State

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	-0.5V to +7.0V
I <sub>IK</sub>	DC Input Diode Current	
	$V_{I} = -0.5V$	–20mA
	$V_{I} = V_{CC} + 0.5$	+20mA
VI	DC Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V
I <sub>OK</sub>	DC Output Diode Current	
	$V_{O} = -0.5V$	–20mA
	$V_{O} = V_{CC} + 0.5V$	+20mA
Vo	DC Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V
Ι <sub>Ο</sub>	DC Output Source or Sink Current	±50mA
I <sub>CC</sub> or I <sub>GND</sub>	DC V <sub>CC</sub> or Ground Current per Output Pin	±50mA
T <sub>STG</sub>	Storage Temperature	-65°C to +150°C
TJ	Junction Temperature	140°C

## **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Rating
V <sub>CC</sub>	Supply Voltage	
	AC	2.0V to 6.0V
	ACT	4.5V to 5.5V
VI	Input Voltage	0V to V <sub>CC</sub>
Vo	Output Voltage	0V to V <sub>CC</sub>
T <sub>A</sub>	Operating Temperature	-40°C to +85°C
$\Delta V / \Delta t$	Minimum Input Edge Rate, AC Devices:	125mV/ns
	$\rm V_{IN}$ from 30% to 70% of $\rm V_{CC}, \rm V_{CC}$ @ 3.3V, 4.5V, 5.5V	
$\Delta V / \Delta t$	Minimum Input Edge Rate, ACT Devices:	125mV/ns
	V <sub>IN</sub> from 0.8V to 2.0V, V <sub>CC</sub> @ 4.5V, 5.5V	

				<b>T</b> <sub>A</sub> = -	⊦25°C	$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Тур.	G	uaranteed Limits	Units
V <sub>IH</sub>	Minimum HIGH Level	3.0	$V_{OUT} = 0.1V$ or	1.5	2.1	2.1	V
	Input Voltage	4.5	V <sub>CC</sub> – 0.1V	2.25	3.15	3.15	
		5.5		2.75	3.85	3.85	
V <sub>IL</sub>	Maximum LOW Level	3.0	$V_{OUT} = 0.1V$ or	1.5	0.9	0.9	V
	Input Voltage	4.5	V <sub>CC</sub> – 0.1V	2.25	1.35	1.35	1
		5.5	-	2.75	1.65	1.65	1
V <sub>OH</sub>	Minimum HIGH Level	3.0	Ι <sub>ΟUT</sub> = –50μΑ	2.99	2.9	2.9	V
	Output Voltage	4.5	-	4.49	4.4	4.4	1
		5.5	-	5.49	5.4	5.4	
		3.0	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OH} = -12\text{mA}$		2.56	2.46	
	4.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OH} = -24 \text{mA}$		3.86	3.76		
		5.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OH} = -24 \text{mA}^{(1)}$		4.86	4.76	-
V <sub>OL</sub>	Maximum LOW Level	3.0	Ι <sub>ΟUT</sub> = 50μΑ	0.002	0.1	0.1	V
	Output Voltage	4.5		0.001	0.1	0.1	1
		5.5		0.001	0.1	0.1	1
		3.0	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OL} = 12 \text{mA}$		0.36	0.44	
		4.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OL} = 24 \text{mA}$		0.36	0.44	
		5.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OL} = 24 \text{mA}^{(1)}$		0.36	0.44	
I <sub>IN</sub> <sup>(2)</sup>	Maximum Input Leakage Current	5.5	$V_I = V_{CC}$ , GND		±0.1	±1.0	μA
I <sub>OLD</sub>	Minimum Dynamic	5.5	V <sub>OLD</sub> = 1.65V Max.			75	mA
I <sub>OHD</sub>	Output Current <sup>(3)</sup>	5.5	V <sub>OHD</sub> = 3.85V Min.			-75	mA
I <sub>CC</sub> <sup>(2)</sup>	Maximum Quiescent Supply Current	5.5	$V_{IN} = V_{CC}$ or GND		4.0	40.0	μA
I <sub>OZT</sub>	Maximum I/O Leakage Current	5.5			±0.3	±3.0	μA

## **DC Electrical Characteristics for AC**

#### Notes:

1. All outputs loaded; thresholds on input associated with output under test.

2. I<sub>IN</sub> and I<sub>CC</sub> @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V V<sub>CC</sub>.

3. Maximum test duration 2.0ms, one output loaded at a time.

				<b>T</b> <sub>A</sub> = ⊣	-25°C	$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$	
Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	Тур.	G	uaranteed Limits	Units
V <sub>IH</sub>	Minimum HIGH Level	4.5	$V_{OUT} = 0.1V \text{ or}$	1.5	2.0	2.0	V
	Input Voltage		V <sub>CC</sub> – 0.1V	1.5	2.0	2.0	
V <sub>IL</sub>	Maximum LOW	4.5	$V_{OUT} = 0.1V$ or	1.5	0.8	0.8	V
	Level Input Voltage	5.5	V <sub>CC</sub> – 0.1V	1.5	0.8	0.8	
V <sub>OH</sub>	Minimum HIGH Level	4.5	$I_{OUT} = -50 \mu A$	4.49	4.4	4.4	V
	Output Voltage	5.5		5.49	5.4	5.4	
		4.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OH} = -24 \text{mA}$		3.86	3.76	
		5.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OH} = -24 \text{mA}^{(4)}$		4.86	4.76	
V <sub>OL</sub>	V <sub>OL</sub> Maximum LOW Level Output Voltage	4.5	Ι <sub>ΟUT</sub> = 50μΑ	0.001	0.1	0.1	V
		5.5	-	0.001	0.1	0.1	
		4.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OL} = 24 \text{mA}$		0.36	0.44	
		5.5	$V_{IN} = V_{IL} \text{ or } V_{IH},$ $I_{OL} = 24 \text{mA}^{(4)}$		0.36	0.44	
I <sub>IN</sub>	Maximum Input Leakage Current	5.5	$V_I = V_{CC}$ , GND		±0.1	±1.0	μA
I <sub>CCT</sub>	Maximum I <sub>CC</sub> /Input	5.5	$V_I = V_{CC} - 2.1V$	0.6		1.5	mA
I <sub>OLD</sub>	Minimum Dynamic	5.5	$V_{OLD} = 1.65V$ Max.			75	mA
I <sub>OHD</sub>	Output Current <sup>(5)</sup>	5.5	V <sub>OHD</sub> = 3.85V Min.			-75	mA
I <sub>CC</sub>	Maximum Quiescent Supply Current	5.5	$V_{IN} = V_{CC}$ or GND		4.0	40.0	μA
I <sub>OZT</sub>	Maximum I/O Leakage Current	5.5			±0.3	±3.0	μA

#### Notes:

4. All outputs loaded; thresholds on input associated with output under test.

5. Maximum test duration 2.0ms, one output loaded at a time.

## **AC Electrical Characteristics for AC**

				$\begin{array}{l} T_{A}=+25^{\circ}C,\\ C_{L}=50pF \end{array}$		$\label{eq:T_A} \begin{array}{c} T_A = -40^{\circ}C \text{ to } +85^{\circ}C, \\ C_L = 50pF \end{array}$			
Symbol	Parameter	V <sub>CC</sub> (V) <sup>(6)</sup>	Min.	Тур.	Max.	Min.	Max.	Units	
t <sub>PLH</sub>	Propagation Delay,	3.3	1.5	5.0	8.5	1.0	9.0	ns	
	$A_n$ to $B_n$ or $B_n$ to $A_n$	5.0	1.5	3.5	6.5	1.0	7.0		
t <sub>PHL</sub>	Propagation Delay,	3.3	1.5	5.0	8.5	1.0	9.0	ns	
	$A_n$ to $B_n$ or $B_n$ to $A_n$	5.0	1.5	3.5	6.0	1.0	7.0		
t <sub>PZH</sub>	Output Enable Time	3.3	2.5	7.0	11.5	2.0	12.5	ns	
		5.0	1.5	5.0	8.5	1.0	9.0		
t <sub>PZL</sub>	Output Enable Time	3.3	2.5	7.5	12.0	2.0	13.5	ns	
		5.0	1.5	5.5	9.0	1.0	9.5		
t <sub>PHZ</sub>	Output Disable Time	3.3	2.0	6.5	12.0	1.0	12.5	ns	
		5.0	1.5	5.5	9.0	1.0	10.0		
t <sub>PLZ</sub>	Output Disable Time	3.3	2.0	7.0	11.5	1.5	13.0	ns	
		5.0	1.5	5.5	9.0	1.0	10.0		

#### Note:

6. Voltage range 3.3 is 3.3V  $\pm$  0.3V. Voltage range 5.0 is 5.0V  $\pm$  0.5V.

## **AC Electrical Characteristics for ACT**


				λ = +25° 3 <sub>L</sub> = 50p			C to +85°C, 50pF	
Symbol	Parameter	V <sub>CC</sub> (V) <sup>(7)</sup>	Min.	Тур.	Max.	Min.	Max.	Units
t <sub>PLH</sub>	Propagation Delay, $A_n$ to $B_n$ or $B_n$ to $A_n$	5.0	1.5	4.0	7.5	1.5	8.0	ns
t <sub>PHL</sub>	Propagation Delay, $A_n$ to $B_n$ or $B_n$ to $A_n$	5.0	1.5	4.0	8.0	1.0	9.0	ns
t <sub>PZH</sub>	Output Enable Time	5.0	1.5	5.0	10.0	1.5	11.0	ns
t <sub>PZL</sub>	Output Enable Time	5.0	1.5	5.5	10.0	1.5	12.0	ns
t <sub>PHZ</sub>	Output Disable Time	5.0	1.5	5.5	10.0	1.0	11.0	ns
t <sub>PLZ</sub>	Output Disable Time	5.0	2.0	5.0	10.0	1.5	11.0	ns

#### Note:

7. Voltage range 5.0 is 5.0V  $\pm$  0.5V.

## Capacitance


Symbol	Parameter	Conditions	Тур.	Units
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = OPEN	4.5	pF
C <sub>I/O</sub>	Input/Output Capacitance	$V_{CC} = 5.0V$	15.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance	$V_{CC} = 5.0V$	45.0	pF

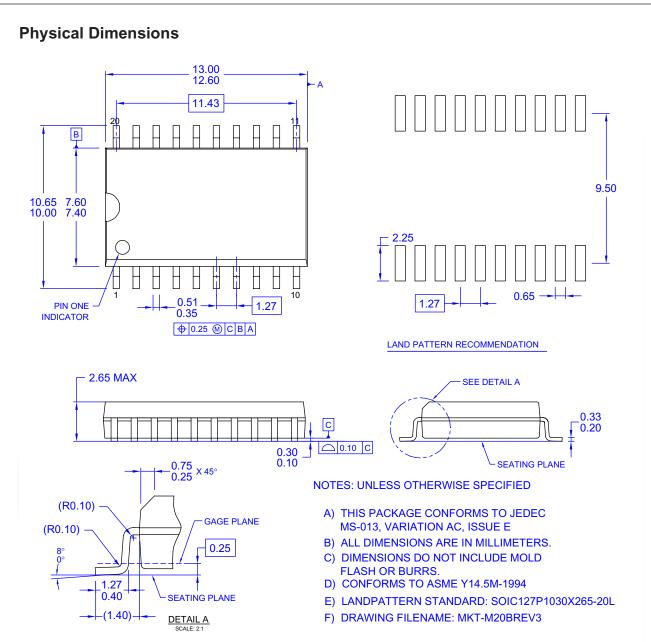


## Figure 1. 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/

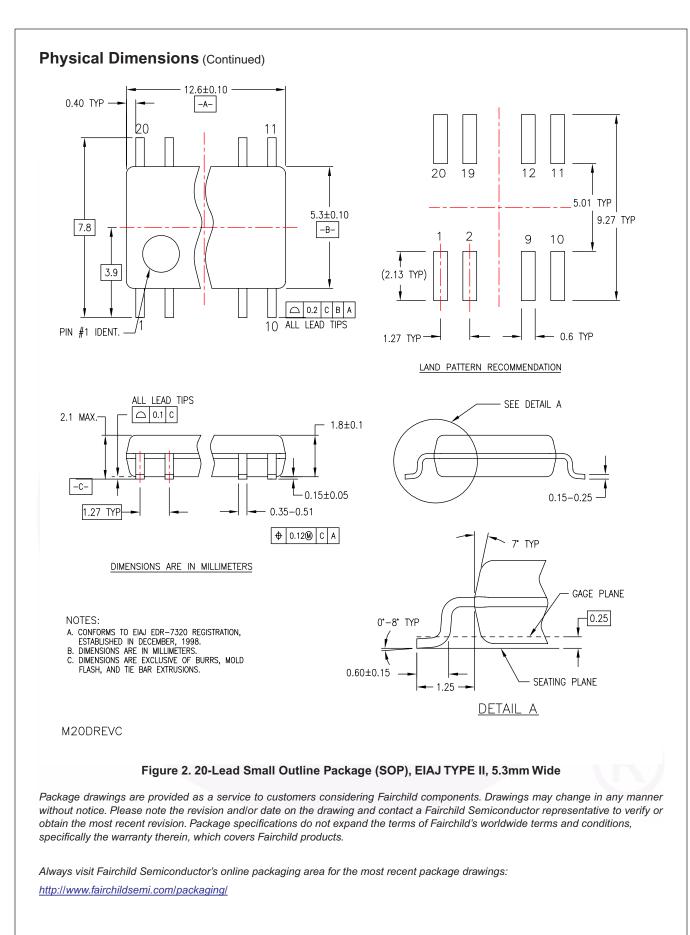

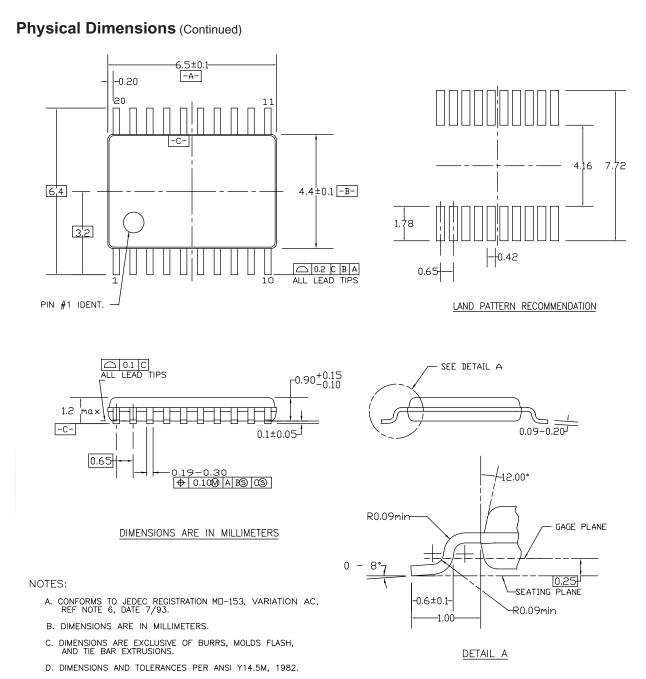

74AC245, 74ACT245 — Octal Bidirectional Transceiver with 3-STATE Inputs/Outputs


#### MTC20REVD1

#### Figure 3. 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide


Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

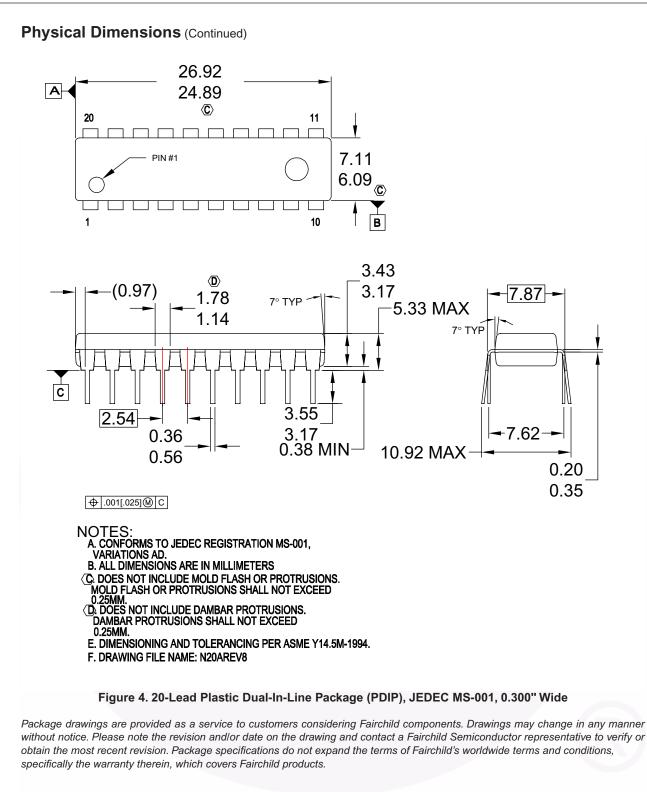

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <u>http://www.fairchildsemi.com/packaging/</u>

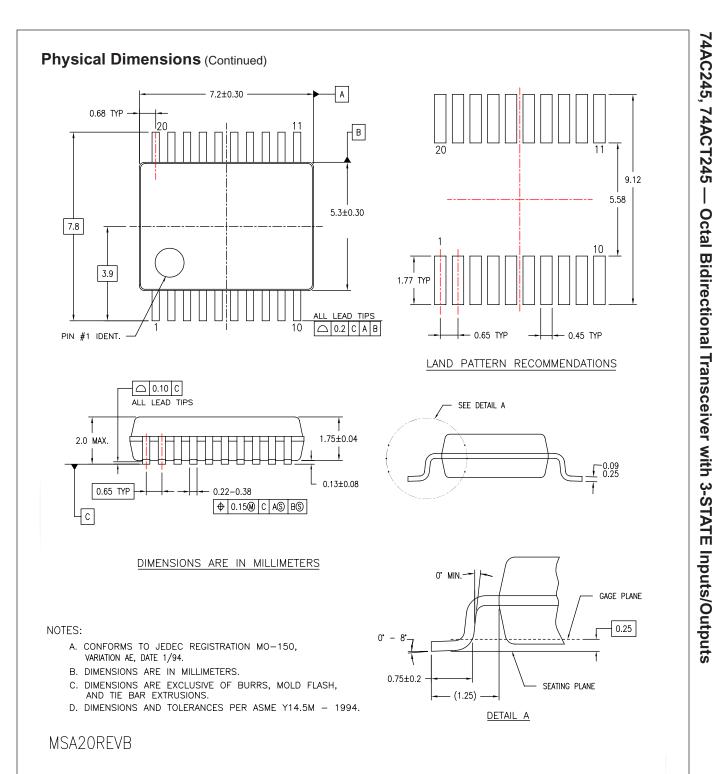

#### Figure 5. 20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/



SEMICONDUCTOR

#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

ACEx <sup>®</sup> Build it Now <sup>TM</sup> CorePLUS <sup>TM</sup> $CROSSVOLT^{TM}$ CTL <sup>TM</sup> Current Transfer Logic <sup>TM</sup> EcoSPARK <sup>®</sup> EZSWITCH <sup>TM</sup> * $\mathbf{F}^{\mathbb{C}}$ <sup>®</sup> Fairchild <sup>®</sup>	FPS™ FRFET <sup>®</sup> Global Power Resource <sup>SM</sup> Green FPS™ e-Series™ GTO™ <i>i-Lo™</i> IntelliMAX™ ISOPLANAR™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroFET™ Miden-SPM™ OPTOLOGIC <sup>®</sup> OPTOPLANAR <sup>®</sup>	PDP-SPM <sup>™</sup> Power220 <sup>®</sup> Power247 <sup>®</sup> POWEREDGE <sup>®</sup> Power-SPM <sup>™</sup> PowerTrench <sup>®</sup> Programmable Active Droop <sup>™</sup> QFET <sup>®</sup> QS <sup>™</sup> QT Optoelectronics <sup>™</sup> Quiet Series <sup>™</sup> RapidConfigure <sup>™</sup> SMART START <sup>™</sup> SMART START <sup>™</sup> SPM <sup>®</sup> STEALTH <sup>™</sup> SuperFET <sup>™</sup> SuperFET <sup>™</sup> SuperSOT <sup>™</sup> -6 SuperSOT <sup>™</sup> -8	SyncFET™ System® The Power Franchise® TinyBoost™ TinyBoost™ TinyBuck™ TinyLogic® TINYOPTO™ TinyPOWer™ TinyPWM™ TinyWire™ µSerDes™ UHC® Ultra FRFET™ UniFET™ VCX™
---	---	---	---

\* EZSWITCH™ and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improv the design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

#### PRODUCT STATUS DEFINITIONS

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

 74ACT245MTCX
 74ACT245MTC
 74AC245SCX
 74AC245SJX
 74ACT245SC
 74ACT245SJ
 74ACT245SJ
 74ACT245SCX

 74AC245MTC
 74AC245MTCX
 74ACT245SJX
 74AC245SC
 74AC245SJ
 74AC245PC
 74ACT245MSAX

 74ACT245MSA
 74ACT245PC
 74ACT245PC
 74ACT245MSA
 74ACT245PC