

High Frequency Ceramic Solutions

1850 MHz EIA 0805 1:1 RF Balun


P/N 1850BL15B050

Detail Specification: 7/16/2014

Page 1 of 4

General Specifications


Part Number	1850BL15B050	
Unbalanced Impedance (single ended)	50 Ω	
Differential Balanced Imp.	50 Ω	
Operating Frequency 1 (MHz)	1700 ~ 2000	
Insertion Loss, Oper Freq 1	1.0 dB max.	
Return Loss, Oper Freq 1	9.5 dB min.	
Operating Frequency 2 (MHz)	1700 ~ 2300	
Insertion Loss, Oper Freq 2	1.1 dB max.	Power Capacity
Return Loss, Oper Freq 2	9.0 dB min.	Operating Temperature
Phase Difference (1&2)	180 ± 10 deg.	Storage Temperature Range
Amplitude Difference (1&2)	2 dB max.	Reel Quantity
		3 W max. (CW)
		-40 to +85°C
		-40 to +85°C
		4,000 pcs

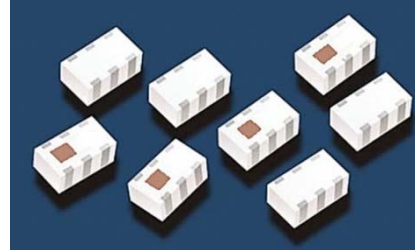

You can download measured s-parameters of this component at: <http://www.johansontechnology.com/rfbaluns>

Mechanical Dimensions


	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.033 ± 0.004	0.85 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +0.004/0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

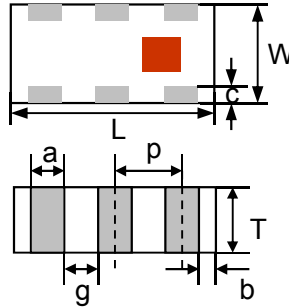

Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND or DC Feed+RF GND	5	GND
3	Balanced Port	6	NC

Mounting Considerations

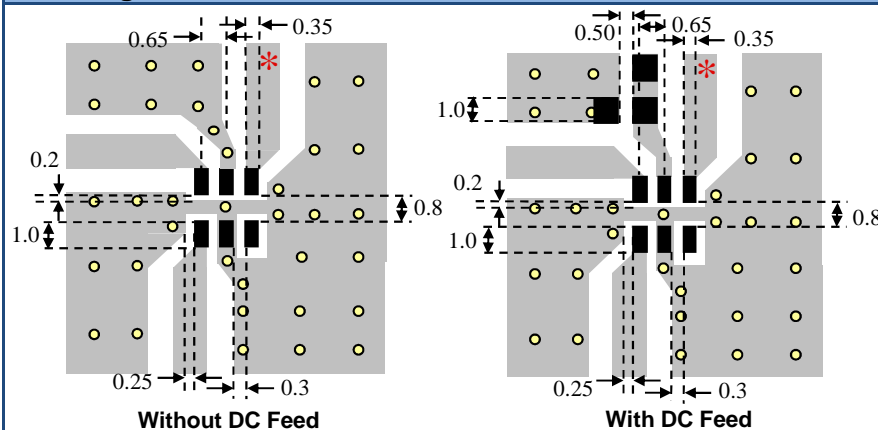

Need our help laying this out for you? Need the layout file? Send us a message at: www.johansontechnology.com/component/techquestion

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2014 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions



1850 MHz EIA 0805 1:1 RF Balun

P/N 1850BL15B050

Detail Specification: 7/16/2014

Page 2 of 4

Typical Electrical Characteristics (T=25°C)

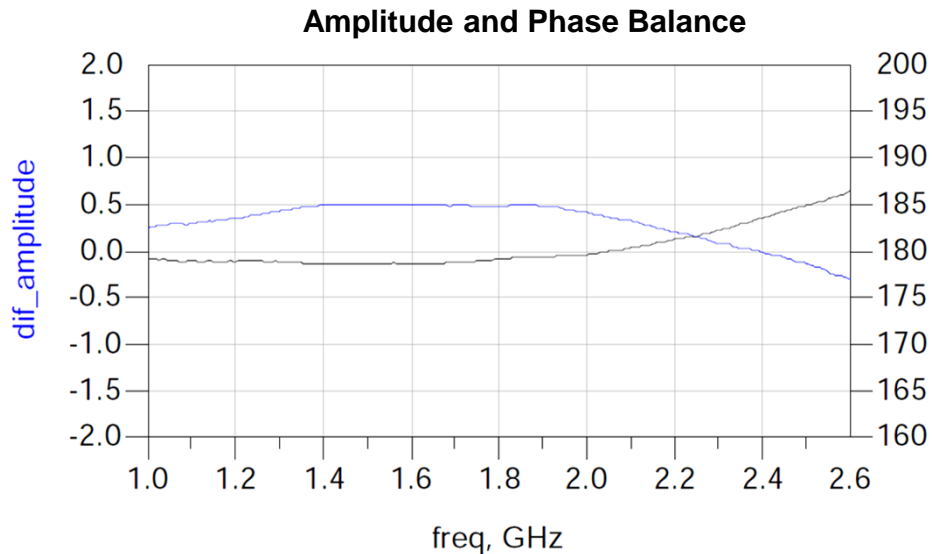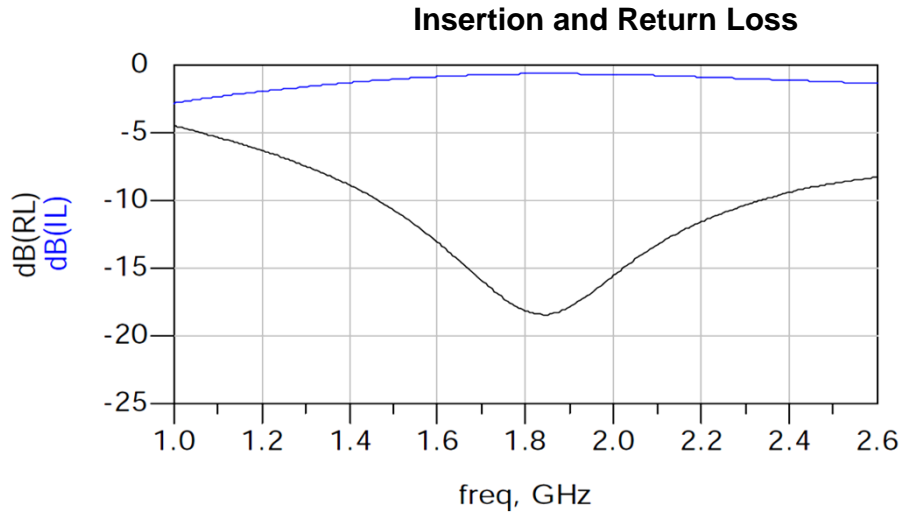

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2014 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


1850 MHz EIA 0805 1:1 RF Balun

P/N 1850BL15B050


Detail Specification: 7/16/2014

Page 3 of 4

Equivalent Circuit

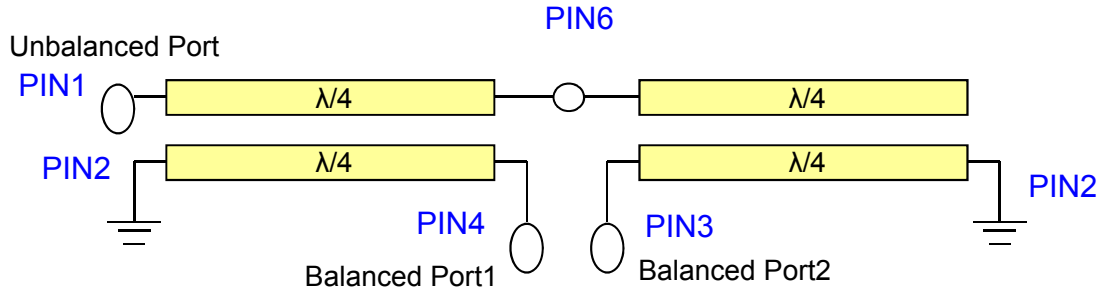

Recommended Circuit when using DC-Feed (Pin 2) feature

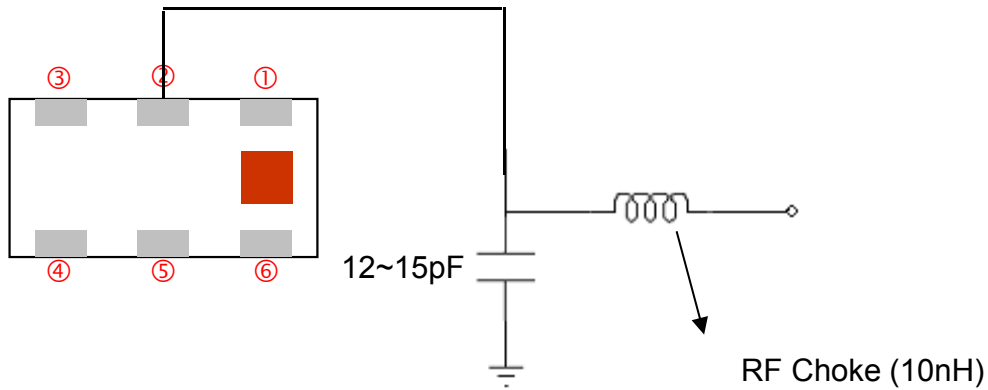

Note: The by-pass capacitor and RF choke should be placed as *close as possible* to Pin2 of balun!

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2014 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

1850 MHz EIA 0805 1:1 RF Balun

P/N 1850BL15B050

Detail Specification: 7/16/2014

Page 4 of 4

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	Eg. 1850BL15B050S
		T & R	Suffix = E	Eg. 1850BL15B050E
	Termination style	100% Tin	Suffix = None	Eg. 1850BL15B050 (E or S)
	Evaluation Board	1850BL15B050-EBSMA		

Recommended Storage Conditions of unused product on T&R

+5 to +35°C, 18 mos. max. Humidity 45~75% RH

More Filter-Balun info at:

<http://www.johansontechnology.com/rfbaluns>

Packaging information

www.johansontechnology.com/ipcpackaging.html

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/ipcstorage-shelflife

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2014 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[1850BL15B050E](#)