

Lighting Connectors, 224 Series – Description and Handling –

482 Lighting side










To connect: Press button fully and insert stripped conductor into square entry until it hits backstop and release.



To remove: Press button and withdraw conductor.

CAGE CLAMP® clamps the following copper conductors: *




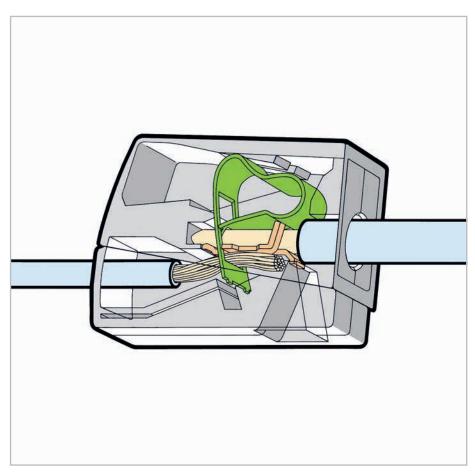

Installation side



To connect: Insert stripped solid conductor into circular entry and push until it hits the backstop.



To remove: Hold conductor to be removed and twist alternately left and right while pulling the connector.



Testing through separate test slot.



PUSH WIRE® clamps the following copper conductors:

solid

* Use contact paste "Alu-Plus" when connecting aluminum conductors Item No. 249-130