

IEC Appliance Inlet C14 with Fuseholder 1- or 2-pole (5x20 mm)







Screw-on mounting

Snap-in mounting

KPF Filter Module (not enclosed)



70° C

Description

- Panel Mount : Sandwich/rear-side
- 2 Functions:
- Appliance Inlet Protection class I , Fuseholder for fuse-links 5 x 20 mm 1- or 2-pole
- Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-12 and -13.
- For PCB mounting

Approvals and Compliances

Characteristics

- Panel mount from rear or "sandwich" between top and bottom/side to side panels
 - PCB mount with snap-in or screw-on feet (self tapping screws Ø 3 x 8
- All single elements are already wired
- Fuse drawer meets requirements of medical standard IEC/EN 60601-1
- Insulation cover on the rear-side
- Suitable for use in equipment according to IEC/UL 60950

Other versions on request

- Solder terminals
- Quick-connect terminals
- For protection class II

References

Alternative: version with line filter KPF

Weblinks

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Accessories, Detailed request for product, Microsite

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

| Technical Data | |
|----------------------------|---|
| Ratings IEC | 10A / 250VAC: 50Hz |
| Ratings UL/CSA | 10A / 125 VAC; 60 Hz |
| Dielectric Strength | > 2.3 kVAC between L-N |
| - | > 2.8 kVAC between L/N-PE |
| | (1 min/50 Hz) |
| Allowable Operation Tempe- | -25 °C to 70 °C |
| rature | |
| IP-Protection | from front side IP 40 acc. to IEC 60529 |
| Insulation cover | Suitable for appliances with protection class I acc. to IEC 61140 |
| Terminal | For PCB mounting Quick connect termi- |
| | nals 4.8 x 0.8 mm |
| | Solder terminal on request |
| Panel Thickness S | Snap-in: 1.5/2/2.5/3 mm |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| C14 acc. to IEC 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A Protection Class I |
|--|
| 1 or 2 pole, Shocksafe category PC2 acc. to IEC 60127-6, for fuse-links 5 x 20 mm |
| 5 x 20: 2W (1 pole)/ 1.6W (2-pole) per pole |
| Admissible power acceptance at higher ambient temperature see derating curves |
| |

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: KP01

| Approval Logo | Certificates | Certification Body | Description |
|---------------|---------------|--------------------|-----------------------------------|
| I I 10 | VDE Approvals | VDE | Certificate Number: 40029370 |
| A | UL Approvals | UL | UL File Number: E93617 |
| ® | CSA Approvals | CSA | CSA Certification Record: 38456 |
| <u></u> | CQC Approvals | CQC | CCC File Number: 2013010204594658 |
| | | | |

Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--------------|-----------------------|------------------|---|
| <u>IEC</u> | Designed according to | IEC 60320-1 | Appliance couplers for household and similar general purposes |
| <u>IEC</u> | Designed according to | IEC 60127-6 | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links |
| <u>IEC</u> | Designed according to | IEC 61058-1 | Switches for appliances. Part 1. General requirements |
| (UL) | Designed according to | UL 498 | Standard for Attachment Plugs and Receptacles |
| CSA Group | Designed according to | CSA C22.2 no. 42 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

Application standards

Application standards where the product can be used

| Organization | Design | Standard | Description |
|--------------|--------------------------------|--------------|---|
| <u>IEC</u> | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. $\label{eq:continuous}$ |
| <u>IEC</u> | Designed for applications acc. | IEC 60601-1 | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance |
| <u>IEC</u> | Designed for applications acc. | IEC 60335-1 | Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-12 and -13. |


Compliances

The product complies with following Guide Lines


| | O . | | |
|----------------|------------------------------|-------------|--|
| Identification | Details | Initiator | Description |
| C€ | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
| RoHS | RoHS | SCHURTER AG | EU Directive RoHS 2011/65/EU |
| © | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
| REACH | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |
| V -Lock | MicrositeV-Lock | SCHURTER AG | V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset. |
| T | Medical Equipment | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1 |

Dimensions [mm]

Screw-on mounting

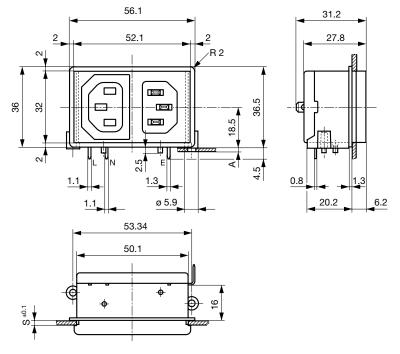


 $\label{eq:A} A = \text{for PCB-thickness 1.2/1.6/2.0/2.4 mm} \\ \text{Additional quick connect terminal 4.8 x 0.8 mm}$ Snap-in mounting

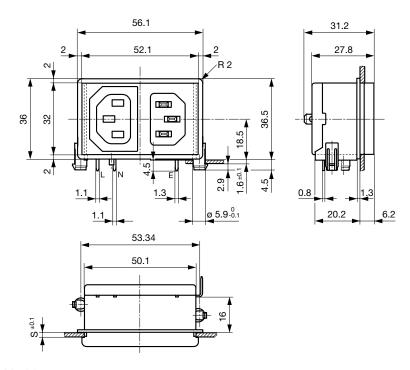


Additional quick connect terminal 4.8 x 0.8 mm s = panel thickness

For 2-pole inlet/switch, 2-pole inlet fuseholder and inlet/outlet

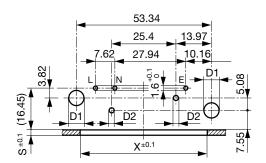

oFr combinations: Inlet/switch 1-pole, inlet/fuseholder 1-pole



 $d1 = 6 \pm 0.05$ für (snap-in)

d1 = 3.6 (screw-on)


d2 = 2.1 + 0.1/-0 (screw-on)

Dimensions without tolerance:

 $\leq 15 = \pm 0.05; \geq 15 = \pm 0.1$

Mounting holes for backside mounting






X = 48.4 at S = 1.5 and 2.5 X = 50.4 at S = 2.0 and 3.0

Sandwich mounting holes


S and X see mounting holes




X = 48.4 at S = 1.5 and 2.5 X = 50.4 at S = 2.0 and 3.0

Assembly Instructions

 $52.4^{\pm0.1}$

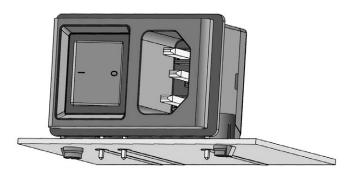



Stable snap feet requires minimal insertion force

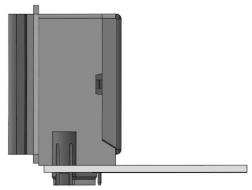


Module must lay flat on the PCB when soldering



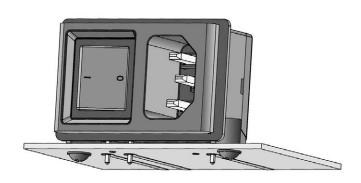

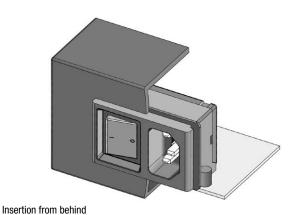


Screw-on mount uses self-tapping screws




"Sandwich" mounting with split enclosure panels


Diagrams



Inlet with fuseholder (5 x 20 mm)

Derating Curves

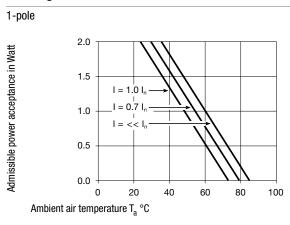

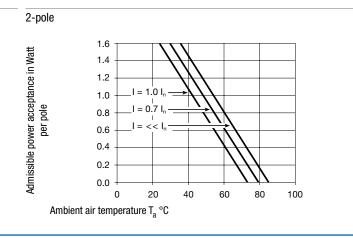

All Variants

| Panel mounting | Panel Thickness s [mm] | PCB [mm] | Line Switch | Fuseholder | Connector | V-Lock | Order Number |
|----------------|---------------------------|-----------------|-------------|------------|-----------|--------|--------------|
| Snap-in | 2 | 1.6 | - | 1-pole | - | | KP01.1412.01 |
| Snap-in | 2 | 1.6 | - | 2-pole | - | | KP01.1312.01 |
| Snap-in | 3 | 1.6 | - | 1-pole | - | | KP01.1413.01 |
| Snap-in | 3 | 1.6 | - | 2-pole | - | | KP01.1313.01 |
| Screw | 2 | 1.2/1.6/2.0/2.4 | - | 1-pole | - | | KP01.1452.01 |
| Screw | 2 | 1.2/1.6/2.0/2.4 | - | 2-pole | - | | KP01.1352.01 |
| Screw | 3 | 1.2/1.6/2.0/2.4 | - | 1-pole | - | | KP01.1453.01 |
| Screw | 3 | 1.2/1.6/2.0/2.4 | - | 2-pole | - | | KP01.1353.01 |

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Type KP without cover: KP01.XXXX.XX90

Ground Terminal with solder pin: KP01.XXXX.X3XX

Packaging unit

50 Pcs

Mating Outlets/Connectors

Category / Description



Appliance Outlet Overview complete

| IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal | 4787 |
|---|------|
| IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal | 5091 |

Appliance Outlet further types to KP (FH)

Connector Overview complete



| 4782 Mounting: Power Cord, 3 x 1 mm² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4782 |
|--|---------|
| 4022 Mounting: Power Supply Cord, 3 x 1.5 mm², Screw clamps, Connector: IEC C13 | 4022 |
| 4785 Mounting: Power Cord, 3 x 1 mm 2 / 3 x 18 AWG, Cable, Connector: IEC C13 | 4785 |
| 4300-06 Mounting: Power Cord, 3 x 1 mm² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4300-06 |
| 4012 Mounting: Power Supply Cord, 3 x 1.5 mm², Screw clamps, Connector: IEC C13 | 4012 |
| Connector further types to KP (FH) | |

Mating Outlets/Connectors shuttered



Power Cord Overview complete

VAC13KS, Overview, diverse Connector IEC C13, cord end: VAC13KS

Power Cord further types to KP (FH)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

<u>KP01.1352.01</u> <u>KP01.1312.01</u> <u>KP01.1412.01</u> <u>KP01.1452.01</u> <u>KP01.1313.01</u> <u>KP01.1353.01</u> <u>KP01.1413.01</u> KP01.1453.01