#### **Miniature Toggles**

#### **Series** M

## A Toggles General Specifications

Programmable Illuminated PB Pushbuttons Rockers	Electrical Capacity (Resistive Load)         Power Level (silver):       6A @ 125V AC & 3A @ 250V AC         Logic Level (gold):       6A @ 125V AC & 3A @ 250V AC         Logic Level (gold):       0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)         Logic/Power Level (gold over silver):       0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)         Combines silver & gold ratings       Note: Find additional explanation of dual rating & operating range in Supplement section.         Other Ratings       0.100000000000000000000000000000000000							
le Illuminated P	Contact Resistance:       10 milliohms maximum for silver; 20 milliohms maximum for gold         Insulation Resistance:       1,000 megohms minimum @ 500V DC         Dielectric Strength:       1,000V AC minimum between contacts for 1 minute minimum;         1,500V AC minimum between contacts and case for 1 minute minimum         Mechanical Life:       100,000 operations minimum; 50,000 operations minimum for flat, locking & splashproof devices							
Programmab	Electrical Life: 25,000 operations minimum for silver; 50,000 operations minimum for gold; 50,000 operations minimum for silver at 3A @ 125V AC Angle of Throw: 25°							
Keylocks	Bushing: Case:	Brass with chrome plating Frame: Stainless steel Brass with nickel plating Support Bracket: Brass with tin plating Diallyl phthalate resin (UL94V–0) Phosphor bronze with silver or gold plating						
Rotaries	Movable Contacts:Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold platingStationary Contacts:Silver with silver plating (code W); copper or brass with gold plating (code G); or silver with gold plating (code A)Terminals:Copper or brass with silver plating; or copper or brass with gold plating							
Slides	Environmental Data Operating Temp Range: -30°C through +85°C (-22°F through +185°F) Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F) Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning							
Tactiles	<ul> <li>in 1 minute; 3 right angled directions for 2 hours</li> <li>Shock: 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)</li> <li>Sealing: Splashproof bushing options B3, D3, D8, L3, &amp; L8, which have o-rings inside &amp; outside the bushing, meet IP67 of IEC60529 Standards.</li> </ul>							
Tilt	Installation Mounting Torque: 3.0Nm (26.55 lb•in) double nut for large bushing; 1.5Nm (13 lb•in) double nut & 0.7Nm (6 lb•in) single nut for all other bushings							
Touch	Soldering:       Wave Soldering (PC version) for Gold: See Profile A in Supplement section.         Manual Soldering for Gold:       See Profile A in Supplement section.         Wave Soldering (PC version) for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.         Manual Soldering for Silver:       See Profile B in Supplement section.							
Indicators	Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution. Standards & Certifications Flammability Standards: UL94V-0 for case UL: File No. E44145 - Recognized only when ordered with marking on switch. Add "/U" or "/CUL" before dash in part number to order UL recognized switch. All models recognized at 6A @ 125V AC, 3A @ 250V AC or 0.4VA maximum @ 28V DC maximum CSA: File No. 023535_0_000 - Certified only when ordered with marking on switch. Add "/C" before dash in part number to order CSA certified switch.							
Accessories								
Supplement		All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA maximum @ 28V maximum.						



A52

Toggles

Rockers

Keylocks Programmable Illuminated PB Pushbuttons

Rotaries

Slides

**Factiles** 

÷

Touch

Indicators

Supplement Accessories

# Distinctive Characteristics

Antirotation design, standard on noncylindrical levers, mates toggle and bushing; bottom of toggle has two flatted sides which fit into a complementary opening inside bushing.

Antijamming design protects contacts from damage due to excessive downward force on actuator.

High torque bushing construction prevents rotation or separation from frame during installation.

High insulating barriers increase isolation of circuits in multipole devices and provide added protection to contact points.

Molded diallyl phthalate case has a UL flammability rating of 94V-0.


Epoxy sealed terminals prevent entry of solder flux and other contaminants.


Prominent external insulating barriers increase insulation resistance and dielectric strength.

Actual Size

Interlocked actuator block, lever, and interior guide prevent switch failure due to biased lever movement.

Clinching of frame to case well above base and terminals provides 1,500V dielectric strength.

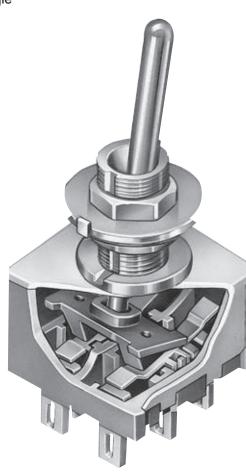

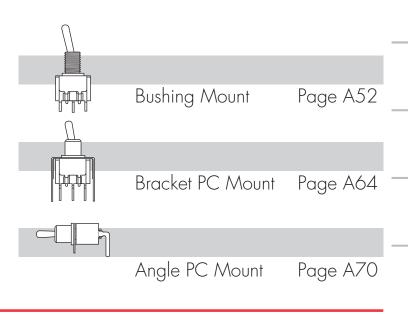

www.nkkswitches.com

#### **Bushing Mount Miniature Toggles**

gles								TYPICAL SWITCH				
<b>Toggles</b>								ITPICAL SWITCH				
Rockers	M20				1	3	S	<u>S</u> <u>S</u> 1				
Pushbuttons								Carall David Street				
8		Poles SPST			S	Small Toggles .413" (10.5mm) Bat	\$1	Small Bushings .350" (8.9mm) Threaded with Keyway				
nated	1	SPDT				.200″ (5.08mm) Bat		4mm 250" (9 9mm) Throaded with				
Programmable		DPST		-		.256″ (6.5mm) Bat	_ \$4	Keyway				
=	2	DPDT SP3T				.450″ (11.4mm) Flatted	S2	.350″ (8.9mm) Smooth with Keyway				
mmak	3	3PDT			- * E2	.256″ (6.5mm) Flatted	A1	.280" (7.1mm) Threaded with Keyway				
ogra		4PDT			 E4	.840″ (21.3mm) Flatted	A2	.280″ (7.1mm) Smooth with Keyway				
Pr	4	DP3T			* Q	.550″ (14.0mm) Cone	D1	.350" (8.9mm) Threaded with D Flat				
Keylocks					* Q2	.640″ (16.26mm) Cone	D4	6mm .350" (8.9mm) Threaded with D Flat				
Key					* Q4	.840″ (21.3mm) Cone	_	.350″ (8.9mm) Threaded Splashproof				
e s					* C	.571" (14.5mm) Color Tipped Cone (available in colors A, B & C only)	D3					
Rotaries					D	.840" (21.3mm) Color Capped Cone	_	6mm .350" (8.9mm) Threaded Splash-				
~					S	pecify cap color for toggles C & D at the end of the part number.	D8	proof with D Flat (combines only with S, S2 & S3)				
Ś	Circuits				•	Available on 1- and 2-pole only.						
Slides	*1 ON NONE OFF			OFF			_					
	2 ON NONE ON			ON								
S	3	ON	OFF	ON		Large Toggles		Large Bushings				
Tactiles	5	ON	NONE	(ON)	В	.453" (11.5mm) Large Bat	_ B1	Large .472" (12mm) Threaded				
T	8	(ON)	OFF	(ON)	B2	.689" (17.5mm) Large Bat		with Keyway				
	9	ON	OFF	(ON)	R	.610" (15.5mm) Large Flatted	B3	Large .472" (12mm) Threaded Splashproof with D Flat				
±:	** 4	ON	ON	ON								
	**6	(ON)	ON	(ON)								
	**7 ON ON (ON)					Locking Lever		Bushings For Locking Levers				
Touch	() = Momentary				L	.201″ (5.1mm) Dia. Locking Lever	_ L1	.291" (7.4mm) Threaded with Keyway				
T	* ON-NONE-OFF circuit avail- able in 1- and 2-pole only.							for Lever Lock				
S	** 3-ON circuits						L4	6mm .291″ (7.4mm) Threaded with Keyway for Lever Lock				
Indicators							L2	Smooth with Keyway for Lever Lock				
	_						L3	.295" (7.5mm) Threaded Splashproof with D Flat for Lever Lock				
Accessories					MADAD	TANIT	L8	8 6mm .295″ (7.5mm) Threaded Splash- proof with D Flat for Lever Lock				
Accé		<u> </u>	n.l		IMPOR							
nt		UL,	cULus & C	SA recogn	ized only w	JLus & CSA marking unless specified. <b>hen ordered with marking on the switch.</b>						
Supplement			ecific mode		& ordering	instructions are noted on the General						
Supp		•pv		1 0-								



Toggles

Rockers

Keylocks Programmable Illuminated PB Pushbuttons

Rotaries

Slides

Tactiles

÷

Touch

Indicators


Supplement 📗 Accessories

#### **ORDERING EXAMPLE**

		01						
C	ontact Materials & Ratings		Optional Caps			Cap Colors		
w	Silver; Rated			For Small Bat Toggles	Α	Black		
••	6A @ 125V AC & 3A @ 250V AC		В	For S Bat Toggle	В	White		
G	Gold; Rated 0.4VA max @ 28V AC/DC max		С	Conical Cap for S Bat Toggle	С	Red		
	Gold over Silver; Rated			For Large Bat Toggles	E	Yellow		
Α	6A @ 125V AC & 0.4VA max @		R	For B Toggle	F	Green		
	28V AC/DC max		V For B2 Toggle			Blue		
				Cap for Locking Lever				
			No Code	Nickel Plated Supplied with Switch				
	Terminals		Α	Black				
01	0		С	Red				
02			G	Blue				
03	.250″ (6.35mm) Straight PC							
05	.425" (10.8mm) Wirewrap							

#### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2013SS1W01

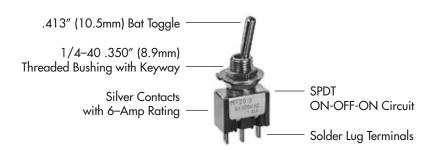



06

07

08

.750" (19.05mm) Wirewrap


.964" (24.5mm) Wirewrap


1.062" (27.0mm) Wirewrap

#### **Bushing Mount Miniature Toggles**


A	POLES & CIRCUITS											
Ĕ			(	<b>Toggle Positic</b> ( ) = Momen		on ntary Connected Terr			Thr	row & Schematics		
Rockers	Pole	Model	Down Keyway	Center	Up	Down Keyway	Center	Up		nal numbers are not actually e switch.		
Pushbuttons	SP	M2011	ON	NONE	OFF	2-3	OPEN	OPEN	SPST	2 (COM)		
Programmable Illuminated PB	SP	M2012 M2013 M2015 M2018 M2019	ON ON (ON)	NONE OFF NONE OFF OFF	ON ON (ON) (ON)	2-3	OPEN	2-1	SPDT	● 2 (COM) 3 ● 1		
able III.	DP	M2021	ON	NONE	OFF	2-3 5-6	OPEN	OPEN	DPST	2 (COM) 5 3 • 6 • 6 • 6 • 6 • 6 • 6 • 6 • 6 • 6 •		
	DP	M2022 M2023 M2025 M2028 M2028 M2029	ON ON (ON)	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6	OPEN	2-1 5-4	DPDT			
Rotaries Keylocks	ЗР	M2032 M2033 M2035 M2038 M2039	ON ON ON (ON)	NONE OFF NONE OFF OFF	(ON) (ON) (ON) (ON)	2-3 5-6 8-9	OPEN	2-1 5-4 8-7	3PDT ₃•∕	2 5 (COM) 8 3 • 1 6 • 4 9 • 7		
Slides	4P	M2042 M2043 M2045 M2048 M2048	ON ON ON (ON)	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6 8-9 11-12	OPEN	2-1 5-4 8-7 11-10	4PDT 3	$\begin{bmatrix} 2 & 5 \\ - & - & - \\ 3 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 4 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 6 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ \bullet & 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\$		
s	For 3 Throw (3-On)											
Tactiles	Connected Terminals &											
	Pole	Model	Down Co	enter Up		Down			enter	Up		
Tilt	SP	M2024 M2026 M2027	(ON)	ИО ИС (ИО) ИС (ИО) ИС		External Connection 2 (in) 5 (out) 3 4 (out) 6 (c	3 4 (out) 6 (out) 1 (ou		4 (out) 6 (out)	External Connection 7 2 (in) 5 1 (out) 3 4 (out) 6 (out)		
Touch						2-3 5-6 External External			B 5-4	2-1 5-4		
Indicators	DP	M2044 M2046 M2047	(ON)	NO NC (NO) NC (NO) NC		th 6 (out) 7 (out) 9 10 (out) 12 (out)		Connection 7 2 (in) 5 1 (out) 3 4 (out) 6 (out) 7 (out) 9 10 (out) 12 (out)				
ries.						2-3 5-6 8-9 11-12			3 5-4 11-10	2-1 5-4 8-7 11-10		
ent Accessories	double pole base. External 6 2 Common commo							nn $12$ 9 3 3 Common mmon $12$ 9 3 (in)				
Supplement			ection mus field install		(out) -	Image: large prime     Image: large prime       Image: large prime     Image: large prime <td></td> <td>t) + (out) + (out)</td>				t) + (out) + (out)		
S	A56					www.nkksv	vitches.com	1		SWITCHES		

#### **Bushing Mount Miniature Toggles**

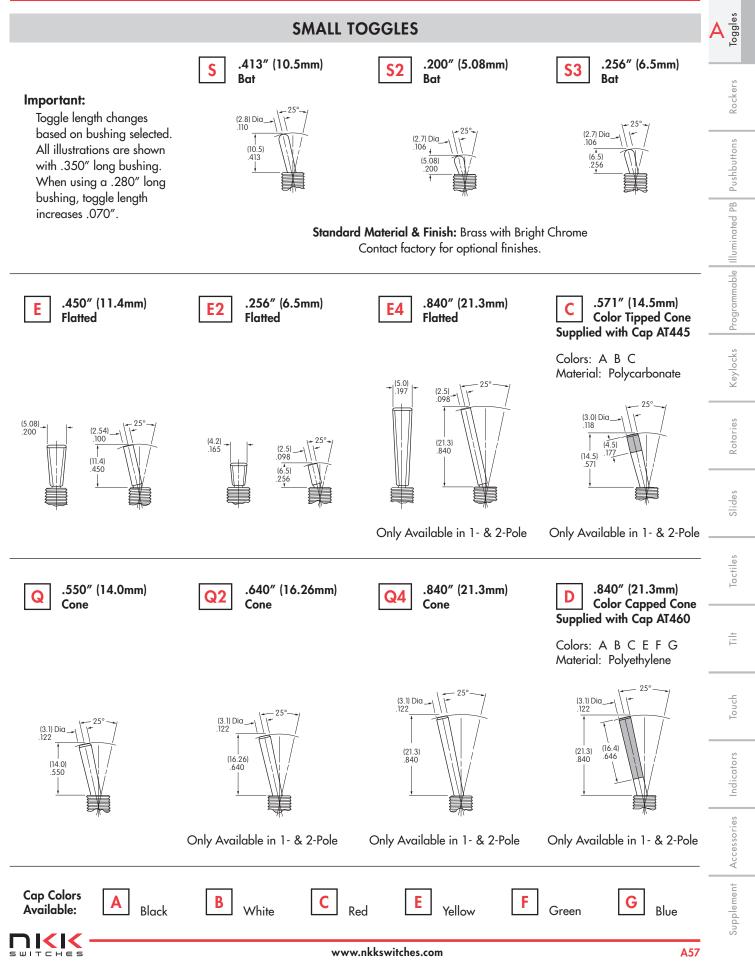

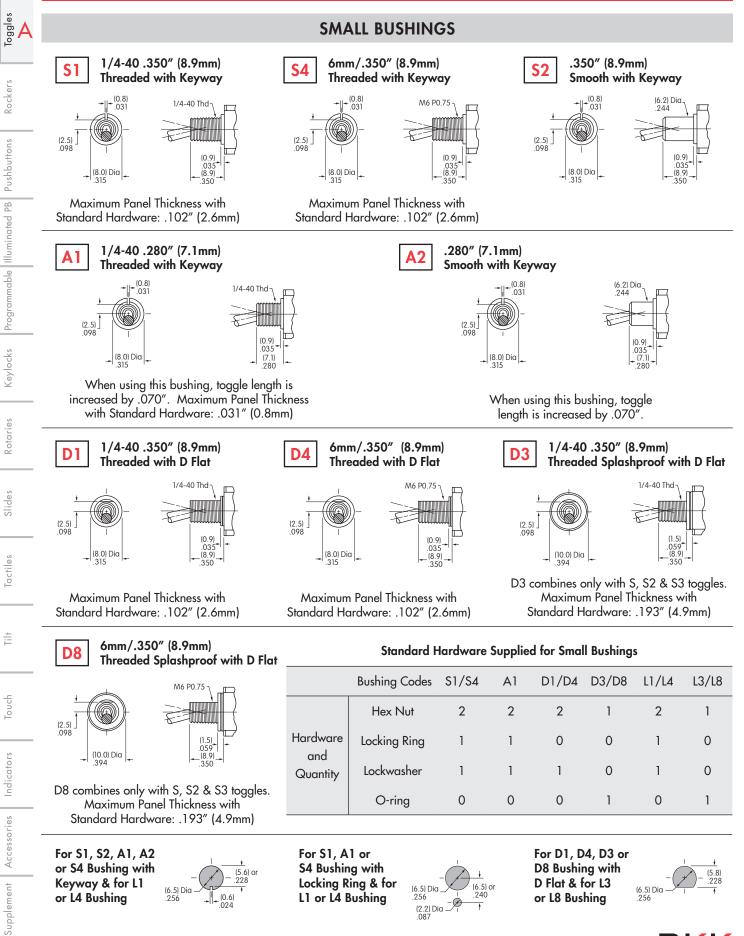




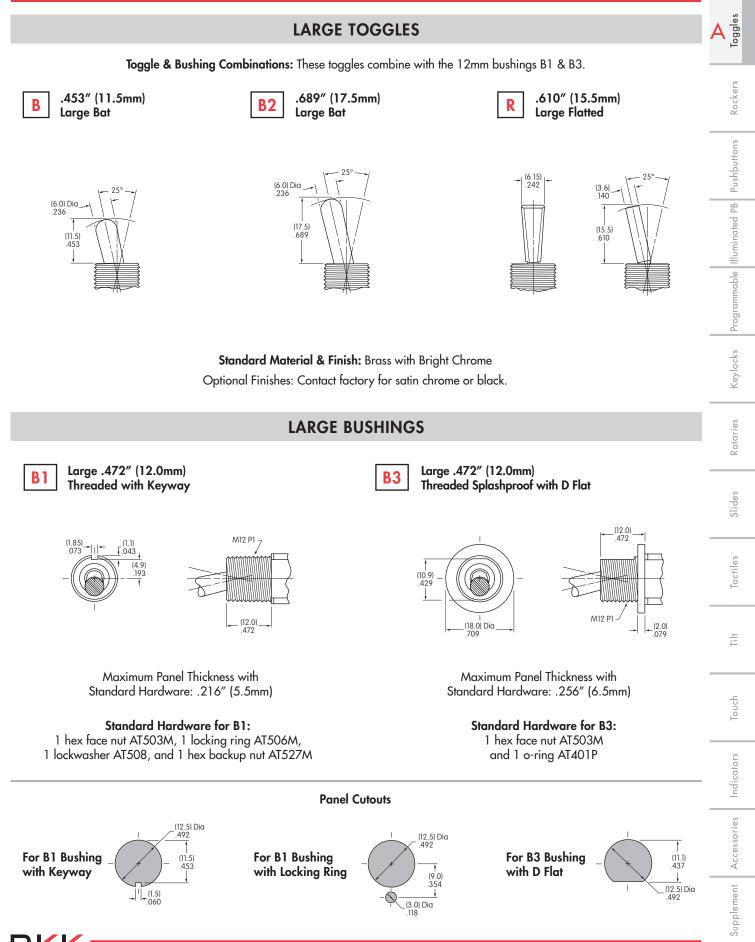

Downloaded from Arrow.com.

снез

www.nkkswitches.com

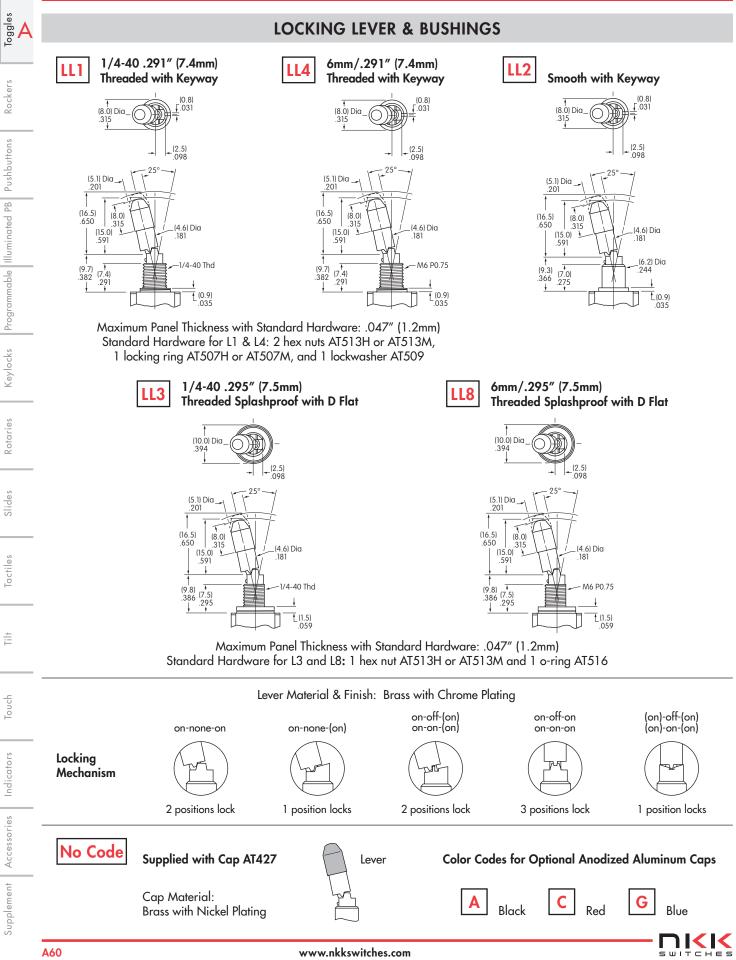

Downloaded from Arrow.com.

Toggles **CONTACT MATERIALS & RATINGS** W Silver over Silver 6A @ 125V AC & 3A @ 250V AC Power Level Rockers G Gold over Brass or Copper Logic Level 6A @ 125V AC & 3A @ 250V AC Programmable Illuminated PB Pushbuttons Note: See Supplement section to find complete explanation of operating range. Α Gold over Silver **Power Level** 6A @ 125V AC or Logic Level or 0.4VA maximum @ 28V AC/DC maximum Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section to find complete explanation of dual rating and operating range. **TERMINALS** .062" (1.57mm) Wide 01 02 (4.0) .157 (6.35) Solder Lug Epoxy Seal **Quick Connect** Epoxy Se (2.0)079 (1.57) Keylocks 043 062 (0.8) .031 Thk = (0.8) .031 Thk = .250" (6.35mm) 03 (4.8) Typ 4.8) Typ 189 Straight PC 189 189 Rotaries 0 (4.7) (4.7) Typ Тур (4.7) Typ .185 (4.7) Typ (4.8) .189 .185 .185 .185 (6.35) Epoxy Se  $\bigcirc$ (1.8) Dia Typ .073 (1.8) Dia Typ (1.8) Dia Typ .046 (1.8) Dia Typ 073 Slides Thk = (0.8) .031 Four Pole Single Pole Double Pole Three Pole .964" (24.5mm) .425" (10.8mm) 05 07 Epoxy Seal Wirewrap or Extended PC Wirewrap or Extended PC Tactiles Dimension A =.750" (19.05mm) 1.062" (27.0mm) terminal lengths 06 **08** Wirewrap or Extended PC Wirewrap or Extended PC as shown beside + (1.27) the terminal codes Thk = (0.8) at the left. If using as extended PC terminal, refer to the above footprints. ÷ **OPTIONAL CAPS & CAP COLORS** \* AT415 Lever Cap \* AT444 Conical Cap AT434 Lever Cap AT406 Lever Cap В Touch R for S Bat Toggle for S Bat Toggle for **B** Toggle for B2 Toggle Material: Material: Material: Material: Polyethylene Polyvinyl Chloride Polyvinyl Chloride Polyethylene Indicators (5.0) Dia\_ .197 (8.0) Dia\_ (4.8) Dia\_\_\_\_ (6.6) Dia\_\_ .315 (12.3) .484 (13.5) (13.1) (18.0)(18.5) .728 Accessories \* AT415 and AT444 for use with S toggles only, not S2 or S3 toggles. Supplement **Cap Colors** G В Available: Black White Yellow Green Blue Red

www.nkkswitches.com

