


The MultiConnect\* Dragonfly™ cellular SoM's are fully certified and MNO approved, ready-to-integrate modules that offer developers the functionality of a programmable computing platform with the convenience of an onboard cellular radio all in one compact design. Dragonfly is programmable using ARM® mbed™ allowing for rapid prototyping, development and deployment. With its integrated Cortex®-M4 processor, developers can host their application and have access to a full suite of interfaces for connecting sensors or other remote assets.

- End device certified by leading carriers
- Family of cellular options include 4G-LTE,
   3G HSPA+, 3G EV-DO and 2G 1xRTT
- Developer friendly to integrate, quick to deploy and scale assets
- Long solution lifecycle reduces redesign time and cost

# **FEATURES**

- Lightweight SoM ideal for most IoT applications
- On-board GNSS or GPS for fast and accurate location fix (3G models)
- Multiple I/O interfaces for connecting most any "Thing"
- Design in or retrofit

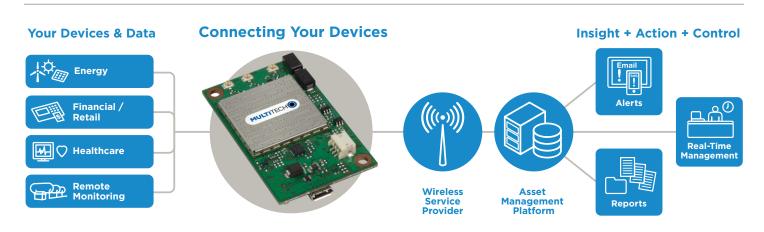

## **HIGHLIGHTS**

### **Host Your Applications**

As the first ARM mbed cellular SoM listed on mbed.org that is industry certified and deployment ready, applications can be written and compiled quickly online using developer friendly libraries, downloaded and hosted within the Dragonfly. Decision making and control is distributed to the edge, enabling data to be more actionable without the heavy lift required to implement complex M2M middleware and security protocols needed to deploy a low touch install.

### Design in or Retrofit

The MultiConnect Dragonfly can be used as an embedded cellular SoM providing the maximum in design and application flexibility or it can be used as an embedded cellular modem controlled through AT commands requiring little or no modification to your design. Connecting to the Dragonfly through its 40-pin board-to-board connector gives you access to all the programmable I/O interfaces. You can also connect to the Dragonfly using the industry standard micro USB port affording you the quickest time to market when your application only requires basic cellular connectivity.

### **SPECIFICATIONS**

Model	MTQ-LAT3-B01 / MTQ-LAT3-B02 MTQ-LVW3-B01 / MTQ-LVW3-B02	MTQ-H5-B01 MTQ-H5-B02	MTQ-EV3-B01 MTQ-EV3-B02	MTQ-C2-B01 MTQ-C2-B02	
Performance	LAT3: LTE 3GPP Release 9 (Category 1: 10 Mbps peak downlink/5 Mbps peak uplink) with HSPA fallback LVW3: LTE 3GPP Release 9 (Category 1; 10 Mbps peak downlink/5 Mbps peak uplink) (No fall back)	HSPA+	EV-DO Rev. A	CDMA2000 1xRTT	
Frequency Band (MHz)	LAT3: 4G: 700(B12/ B13)/850(B5)/ AWS1700(B4)/1900(B2) 3G: 850(B5)/1900(B2) LVW3: 700(B13)/ AWS1700(B4)/1900(B2)	3G: 850/900/AWS 1700/1900/2100 MHz 2G: 850/900/1800/1900 MHz	3G/2G: 800/1900 MHz	2G: 800/1900 MHz	
TCP/IP Functions	FTP, HTTP, SMTP, SSL, TCP, UDP				
Connectors	2 UFL (Cellular, Rx Diversity/ MIMO) 1xMicro USB, 1x 40-Pin Board-to-Board, 1xMicro SIM	3 UFL (Cellular, Rx Diversity & GPS) 1xMicro USB, 1x 40-Pin Board-to-Board, 1xMicro SIM	2 UFL (Cellular & GPS) 1xMicro USB, 1x 40-Pin Board-to-Board	1 UFL (Cellular) 1xMicro USB, 1x 40-Pin Board-to-Board	
Host Processor	Cortex M4 (STM32F411RET) 512 Kbytes of Flash memory and 96 Kbytes of SRAM (B01)				
1/0	1 x UART, 1 x HS USB, 1 x SPI, 1 x I2C, up to 6 analog inputs and up to 16 digital input/output (B01/B03) 1 x UART, 1 x HS USB (B02)				
Dimensions	58.4mm x 34.9mm (2.3 x 1.375 inches)				
Power Draw*	SVDC; 25mA sleep, 58mA idle, 540mA max power (MTQ-LAT3-B01) 5VDC; 25mA sleep, 38mA idle, 510mA max power (MTQ-LAT3-B02) 5VDC; 38mA sleep, 57mA idle, 462mA max power (MTQ-LVW3-B01) 5VDC; 26mA sleep, 37mA idle, 450mA max power (MTQ-LVW3-B02)	5VDC; 25mA sleep, 64mA idle, 635mA max power (B01) 5VDC; 36mA sleep, 42mA idle, 676mA max power (B02)	5VDC; 6mA sleep, 57mA idle, 707mA max power (B01) 5VDC; 24mA sleep, 49mA idle, 644mA max power (B02)	5VDC; 22mA sleep, 63mA idl 690mA max power (B01) 5VDC; 24mA sleep, 53mA idl 640mA max power (B02)	
Input Voltage	5VDC				
Environmental					
Operating Temperature	-40° to +85° C				
Storage Temperature	-40° to +85° C				
Relative Humidity	20% to 90% RH, non-condensing				
Certifications					
EMC Compliance	FCC Part 15 Class B	FCC Part 15 Class B, EN55022, EN55024	FCC Part	15 Class B	
Radio Compliance	LAT3: FCC Part 22, 24, 27 LVW3: FCC Part 27	FCC Part 22, FCC Part 24, RSS 132, RSS 133, EN 301 511, EN 301 489-1, EN 301 489-7, EN 301 489-24	FCC Part 22, FCC Part 24		
Safety	UL/cUL 60950-1 2nd ED, IEC 60950-1 2nd ED +Am.2	UL 60950-1 2nd ED, cUL 60950-1 2nd ED, EN 60950-1 2nd ED, AS/NZS 60950-1 2nd ED	UL/cUL 60950-1 2nd ED, IEC 60950-1 2nd ED +Am,2		
Network	LAT3: PTCRB	PTCRB	N/A		
Carrier	LAT3: AT&T/T-Mobile/ Aeris (Bell, Rogers, Telus planned) LVW3: Verizon	AT&T/T-Mobile/Aeris (Bell, Rogers, Telus planned)	Sprint, Aeris		
Warranty		2-Ye	ears		

<sup>\*</sup>See Device Guide for More Detailed Information

## **ORDERING INFORMATION**

Description	Region
LTE Cat 1 Embedded Cellular SoM (AT&T)	US/Can
Embedded LTE Ca1 Modem (AT&T)	US/Can
LTE Cat 1 Embedded Cellular SoM (Verizon)	USA
Embedded LTE Cat 1 Modem (Verizon)	USA
HSPA+ Embedded Cellular SoM w/GPS	Global
Embedded HSPA+ Modem w/GPS	Global
EV-DO Embedded Cellular SoM w/GNSS (Sprint)	USA
Embedded EV-DO Modem w/GNSS (Sprint)	USA
EV-DO Embedded Cellular SoM w/GNSS (Aeris)	USA
Embedded EV-DO Modem w/GNSS (Aeris)	USA
1xRTT Embedded Cellular SoM (Sprint)	USA
Embedded 1xRTT Modem (Sprint)	USA
1xRTT Embedded Cellular SoM (Aeris)	USA
Embedded 1xRTT Modem (Aeris)	USA
Description	Region
SocketModem® & Dragonfly Developer Kit	Global
	LTE Cat 1 Embedded Cellular SoM (AT&T) Embedded LTE Ca1 Modem (AT&T) LTE Cat 1 Embedded Cellular SoM (Verizon) Embedded LTE Cat 1 Modem (Verizon) HSPA+ Embedded Cellular SoM w/GPS Embedded HSPA+ Modem w/GPS EV-DO Embedded Cellular SoM w/GNSS (Sprint) Embedded EV-DO Modem w/GNSS (Sprint) EV-DO Embedded Cellular SoM w/GNSS (Aeris) Embedded EV-DO Modem w/GNSS (Aeris) IxRTT Embedded Cellular SoM (Sprint) EMBEDDE SOM (AERIS) EMBEDD SOM (

Go to www.multitech.com for detailed product model numbers.

Produced in the U.S. of U.S. and non-U.S. components. Features and specifications are subject to change without notice.

Trademarks and Registered Trademarks: MultiTech and the MultiTech logo, MultiConnect, Dragonfly, SocketModem: Multi-Tech Systems, Inc. All other products and technologies are the trademarks or registered trademarks of their respective holders.

2017-04 • 86002177 • © 2017 by Multi-Tech Systems, Inc. All rights reserved.

## **Services & Warranty**

MultiTech's comprehensive Support Services programs offer a full array of options to suit your specific needs. These services are aimed at protecting your investment, extending the life of your solution or product, and reducing total cost of ownership. Our seasoned technical experts, with an average tenure of more than 10 years, can walk you through smooth installations, troubleshoot issues and help you with configurations.

#### **Installation Support**

MultiTech's Installation Support Service delivers priority service with the ability to work one-onone with an experienced MultiTech technical support engineer, to guide you through the installation process for our products.

# **Technical Support Services**

At MultiTech, we're committed to providing you personalized attention and quality service while providing you a quick response to your product support needs. We have several options of support for you to choose from.

For additional information on Support Services as well as other service offerings, please contact your MultiTech representative or visit

www.multitech.com/support.go

# **World Headquarters**

Multi-Tech Systems, Inc. 2205 Woodale Drive Mounds View, MN 55112 U.S.A. Tel: 763-785-3500 Toll-Free: 800-328-9717 Email: sales@multitech.com www.multitech.com

# **EMEA Headquarters**

Multi-Tech Systems (EMEA) Strata House 264-270 Bath Road Harlington UB3 5JJ United Kingdom Tel: +(44) 118 959 7774 Email: sales@multitech.co.uk www.multitech.co.uk

