

May 2018

# Common mode filters

Automotive power line (for power train/safety)

**ACM-V** series



ACM90V

### **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### ▲ REMINDERS ○ The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). O Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. O When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. ○ Use a wrist band to discharge static electricity in your body through the grounding wire. O Do not expose the products to magnets or magnetic fields. O Do not use for a purpose outside of the contents regulated in the delivery specifications. O The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications) equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us. (1) Aerospace/Aviation equipment (8) Public information-processing equipment (2) Transportation equipment (electric trains, ships, etc.) (9) Military equipment (3) Medical equipment (10) Electric heating apparatus, burning equipment (4) Power-generation control equipment (11) Disaster prevention/crime prevention equipment (5) Atomic energy-related equipment (12) Safety equipment (6) Seabed equipment (13) Other applications that are not considered general-purpose applications (7) Transportation control equipment When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

**公TDK** 

#### EMC Components

### **Common mode filters**

Automotive power line (for power train/safety)

Product compatible with RoHS directive Compatible with lead-free solders AEC-Q200

# **Overview of ACM90V type**

#### FEATURES


Exclusive square type closed magnetic core designed as an exclusive core is used, so it can be small while maintaining the same features.

- O Low profile design makes it optimal for surface mounting.
- O Excellent impedance characteristics, making it great for suppressing common mode noise.
- O The product series is designed for use up to 8A in an environment of 125°C.
- $\bigcirc$  Covers a wide operating temperature range from -40 to +125°C.

#### APPLICATION

O Measures against common mode noise in power lines for various DC power lines, multimedia devices, and various electronic devices, including automotive power trains and safety applications.

#### PART NUMBER CONSTRUCTION



#### OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

|        | Temperat                                        | ure range | Reel diameter | Package quantity | Individual weight |
|--------|-------------------------------------------------|-----------|---------------|------------------|-------------------|
| Туре   | Operating Storage<br>temperature* temperature** |           |               |                  |                   |
|        | (° <b>C</b> )                                   | (°C)      | (mm)          | (pieces/reel)    | (g)               |
| ACM90V | -40 to +125 -40 to +125                         |           | ø330          | 800              | 0.82              |

\* The operating temperature range of this product does not include self-heating. The product can be used up to 150°C including self-heating. When using the product in an environment at 125°C, use the product within the current range shown in the table on page 6/7 of this catalog. \*\*The Storage temperature range is for after the circuit board is mounted.


O RoHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

&ΤDΚ

## ACM90V type

#### RECOMMENDED REFLOW PROFILE

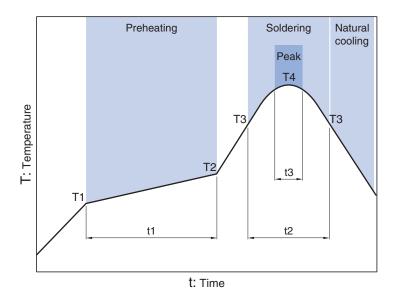


| Preheating | g     |            | Soldering |           | Peak  |      |
|------------|-------|------------|-----------|-----------|-------|------|
| Temp.      |       | Time       | Temp.     | Time      | Temp. | Time |
| T1         | T2    | t1         | Т3        | t2        | T4    | t3   |
| 150°C      | 180°C | 60 to 120s | 230°C     | 10 to 30s | 245°C | 5s   |

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

**⊗TDK** 


## ACM90V type

#### SHAPE & DIMENSIONS

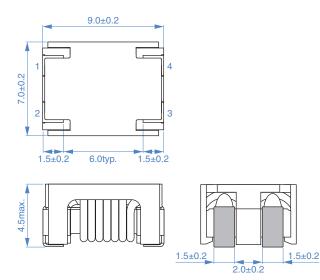


Dimensions in mm

#### RECOMMENDED LAND PATTERN



Dimensions in mm

#### **CIRCUIT DIAGRAM**



A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

⊗TDK

## ACM90V type

#### ELECTRICAL CHARACTERISTICS

#### CHARACTERISTICS SPECIFICATION TABLE


| Common mode impedance   |                         | DC resistance     | Rated current | Rated voltage | Insulation<br>resistance | Part No.            |
|-------------------------|-------------------------|-------------------|---------------|---------------|--------------------------|---------------------|
| [at 100MHz]             |                         |                   |               |               |                          |                     |
| <b>(</b> Ω <b>)min.</b> | <b>(</b> Ω <b>)typ.</b> | (m $\Omega$ )max. | (A)max.       | (V)max.       | (MΩ)min.                 |                     |
| 500                     | 700                     | 10                | 5.0           | 80            | 10                       | ACM90V-701-2PL-TL00 |

#### $\bigcirc$ Measurement equipment

| Measurement item      | Product No. | Manufacturer          |
|-----------------------|-------------|-----------------------|
| Common mode impedance | 4991A       | Keysight Technologies |
| DC resistance         | 4338A       | Keysight Technologies |
| Insulation resistance | 4339A       | Keysight Technologies |

\* Equivalent measurement equipment may be used.

#### □ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

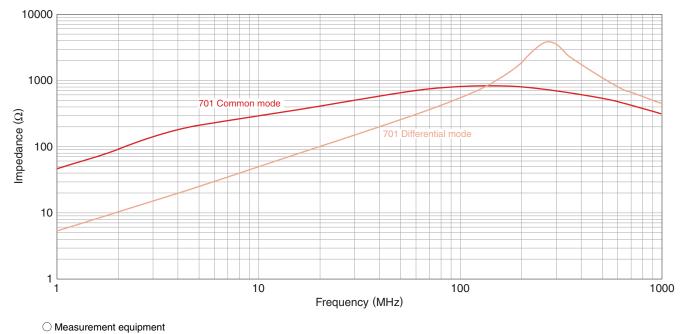

Product No.

|       | Manulacturer          |
|-------|-----------------------|
| 4991A | Keysight Technologies |
|       |                       |

\* Equivalent measurement equipment may be used.

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

**公TDK** 


**⊗TDK** 

### EMC Components

## ACM90V type

#### PACKAGING STYLE


#### **REEL DIMENSIONS**

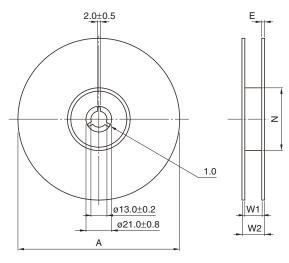

| ĺ | Туре   | А      | W1        | W2        | Ν     | E      |
|---|--------|--------|-----------|-----------|-------|--------|
|   | ACM90V | ø330±2 | 16.4+2/-0 | 20.4 typ. | 100±1 | 2 typ. |


Dimensions in mm

#### **TAPE DIMENSIONS**

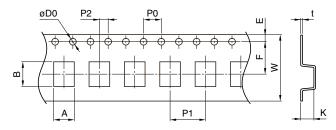

| Dime | nsions | in | mm |
|------|--------|----|----|

|        |         |         |           |          |         |         |          |         |          | 2       |          |
|--------|---------|---------|-----------|----------|---------|---------|----------|---------|----------|---------|----------|
| Туре   | A       | В       | øD0       | E        | F       | P0      | P1       | P2      | W        | K       | t        |
| ACM90V | 8.6±0.1 | 9.6±0.1 | 1.5+0.1/0 | 1.75±0.1 | 7.5±0.1 | 4.0±0.1 | 12.0±0.1 | 2.0±0.1 | 16.0±0.3 | 4.6±0.1 | 0.4±0.05 |

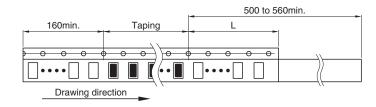

| Туре   | L       |
|--------|---------|
| ACM90V | 440min. |

Dimensions in mm

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.