

## APA3010SURCK-GX

3.0 x 1.0 mm Right Angle SMD Chip LED Lamp



### DESCRIPTIONS

- The Hyper Red source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode
- Electrostatic discharge and power surge could damage the LEDs
- · It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs
- · All devices, equipments and machineries must be electrically grounded

#### **FEATURES**

- 3.0 x 2.0 x 1.0 mm right angle SMD LED, 1.0 mm thickness
- Low power consumption
- · Wide viewing angle
- Ideal for back light and indicator
- Package: 2000 pcs / reel
- Moisture sensitivity level: 3
- · Tinned pads for improved solderability
- Halogen-free
- RoHS compliant

#### **APPLICATIONS**


- Backlight
- Status indicator
- · Home and smart appliances
- · Wearable and portable devices
- Healthcare applications

#### **ATTENTION**

Observe precautions for handling electrostatic discharge sensitive devices




### PACKAGE DIMENSIONS

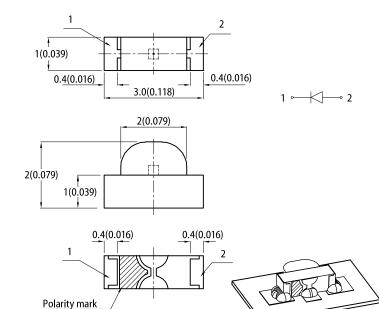

#### **RECOMMENDED SOLDERING PATTERN**

(units : mm; tolerance :  $\pm 0.1$ )



#### Notes

All dimensions are in millimeters (inches).
Tolerance is ±0.15(0.006") unless otherwise noted.
The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

4. The device has a single mounting surface. The device must be mounted according to the specifications. 5. For right angle SMD LEDs, the solder stencil should be at least 5mil in thickness, to prevent poor solder wetting due to insufficient solder paste.

#### SELECTION GUIDE

Part Number	Emitting Color (Material)	Lens Type	lv (mcd) @ 20mA <sup>[2]</sup>		Viewing Angle <sup>[1]</sup>	
			Min.	Тур.	201/2	
APA3010SURCK-GX	■ Hyper Red (AlGaInP)	Water Clear	200	250	120°	
			*55	*80	120	

Notes

1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
Luminous intensity / luminous flux: +/-15%.
Luminous intensity value is traceable to CIE127-2007 standards.

# **Kingbright**

#### ELECTRICAL / OPTICAL CHARACTERISTICS at T<sub>A</sub>=25°C

Parameter	Symbol	Emitting Color	Value		11-14
Parameter			Тур.	Max.	Unit
Wavelength at Peak Emission $I_F$ = 20mA	$\lambda_{peak}$	Hyper Red	645	-	nm
Dominant Wavelength $I_F = 20 \text{mA}$	λ <sub>dom</sub> <sup>[1]</sup>	Hyper Red	630	-	nm
Spectral Bandwidth at 50% $\Phi$ REL MAX $I_{\text{F}}$ = 20mA	Δλ	Hyper Red	28	-	nm
Capacitance	С	Hyper Red	35	-	pF
Forward Voltage I <sub>F</sub> = 20mA	V <sub>F</sub> <sup>[2]</sup>	Hyper Red	1.95	2.5	V
Reverse Current (V <sub>R</sub> = 5V)	I <sub>R</sub>	Hyper Red	-	10	μA
Temperature Coefficient of $\lambda_{\text{peak}}$ $I_F$ = 20mA, -10°C $\leq$ T $\leq$ 85°C	TC <sub>λpeak</sub>	Hyper Red	0.14	-	nm/°C
Temperature Coefficient of $\lambda_{dom}$ $I_F$ = 20mA, -10°C $\leq$ T $\leq$ 85°C	TC <sub>λdom</sub>	Hyper Red	0.05	-	nm/°C
Temperature Coefficient of $V_F$ $I_F$ = 20mA, -10°C $\leq$ T $\leq$ 85°C	TCv	Hyper Red	-1.9	-	mV/°C

Notes:

1. The dominant wavelength (λd) above is the setup value of the sorting machine. (Tolerance λd : ±1nm.)
2. Forward voltage: ±0.1V.
3. Wavelength value is traceable to CIE127-2007 standards.
4. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

#### ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub>=25°C

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	75	mW
Reverse Voltage	V <sub>R</sub>	5	V
Junction Temperature	Tj	115	°C
Operating Temperature	T <sub>op</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +85	°C
DC Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current	I <sub>FP</sub> <sup>[1]</sup>	185	mA
Electrostatic Discharge Threshold (HBM)	-	3000	V
Thermal Resistance (Junction / Ambient)	$R_{th JA}^{[2]}$	560	°C/W
Thermal Resistance (Junction / Solder point)	R <sub>th JS</sub> <sup>[2]</sup>	400	°C/W

Notes: 1. 1/10 Duty Cycle, 0.1ms Pulse Width. 2. R<sub>th. us</sub>, R<sub>m. us</sub> Results from mounting on PC board FR4 (pad size ≥ 16 mm<sup>2</sup> per pad). 3. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.


# **Kingbright**

**RELATIVE INTENSITY vs. WAVELENGTH** 


#### **TECHNICAL DATA**

#### Red 100% T<sub>a</sub> = 25 °C Relative Intensity (a. u.) 80% 60% 40% 20% 0% 350 400 450 500 550 600 650 700 750 800 Wavelength (nm)

#### SPATIAL DISTRIBUTION




#### **HYPER RED**

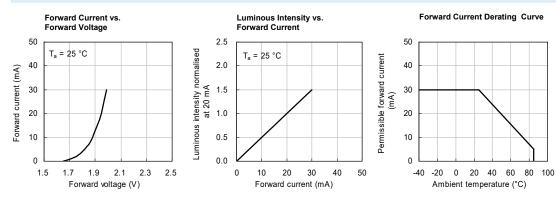




Luminous Intensity vs.


Ambient Temperature




#### **REFLOW SOLDERING PROFILE for LEAD-FREE SMD PROCESS**

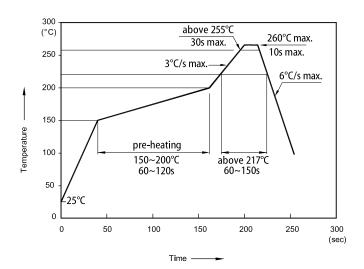

#### TAPE SPECIFICATIONS (units : mm)



#### REEL DIMENSION (units : mm)




Notes

 Don't cause stress to the LEDs while it is exposed to high temperature.
The maximum number of reflow soldering passes is 2 times.
Reflow soldering is recommended. Other soldering methods are not recommended as they might cause damage to the product.

## **Kingbright**

## APA3010SURCK-GX

#### **PACKING & LABEL SPECIFICATIONS**

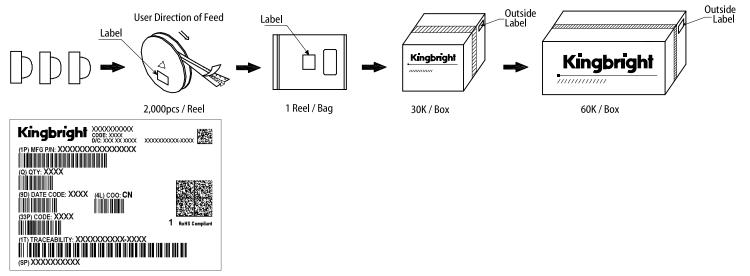

#### **PRECAUTIONARY NOTES**

- The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications. 2.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If
- The contexts and information of this document may be be responsible for any subsequent issues. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance. The contexts and information of this document may not be responduced or re-transmitted without permission by Kingbright. All design applications should refer to Kingbright application notes available at <a href="https://www.KingbrightUSA.com/ApplicationNotes">https://www.KingbrightUSA.com/ApplicationNotes</a> 4
- 5
- 6.