


## Terminals Series

### KLS8-01102 Cross bare terminal Series

Terminal Material: COPPER

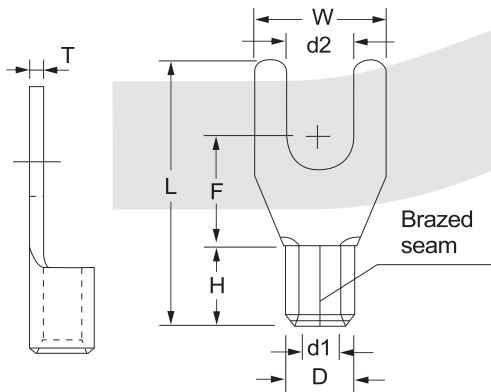

VIII

ITEM NO.	STUD SIZE		DIMENSION mm								PCS/ PACK	EXPLANATION									
	Metric	American	d2	W	F	L	H	d1	D	T											
SNB3.5-3.7	3.5	#6	3.7	8.0	7.7	18.3	6.0	3.0	5.0	1.0	1000	Cross-section of Conductor 2.5-4mm <sup>2</sup> AWG: 14~12 Maximum Current : I <sub>max</sub> =37A Wire range:2.5-4mm <sup>2</sup> A.W.G.:(14-12) Max.current:I <sub>max</sub> =37A									
SNB3.5-4	4	#8	4.3																		
SNB3.5-5	5	#10	5.3																		
SNB3.5-6	6	1/4 "	6.5																		
SNB3.5-8	8	5/16 "	8.5																		
SNB3.5-10	10	3/8 "	10.5																		
SNB5.5-3.5	3.5	#6	3.7	9.0	7.0	18.5	6.0	3.5	5.5	1.0	1000	Cross-section of Conductor : 4-6mm <sup>2</sup> AWG: 12-10 Maximum Current : I <sub>max</sub> =48A Wire range:4-6mm <sup>2</sup> A.W.G.:(12-10) Max.current:I <sub>max</sub> =48A									
SNB5.5-3.7S	3.5	#6	3.7																		
SNB5.5-3.7	3.5	#6	3.7																		
SNB5.5-4SS	4	#8	4.3																		
SNB5.5-4S	4	#8	4.3																		
SNB5.5-4L	4	#8	4.3																		
SNB5.5-5	5	#10	5.3																		
SNB5.5-6S	6	1/4 "	6.5																		
SNB5.5-6L	6	1/4 "	6.5																		
SNB5.5-8	8	5/16 "	8.5																		
SNB5.5-10	10	3/8 "	10.5																		
SNB8-4	4	#8	4.3										9.0	8.1	20.8	8.5	4.8	7.2	1.2	500	Cross-section of Conductor : 6-10mm <sup>2</sup> AWG: 8 Maximum Current : I <sub>max</sub> =62A Wire range:6-10mm <sup>2</sup> A.W.G.:(8) Max.current:I <sub>max</sub> =62A
SNB8-5	5	#10	5.3																		
SNB8-6	6	1/4 "	6.5																		
SNB8-8	8	5/16 "	8.5																		
SNB8-10	10	3/8 "	10.5										10.5	9.5	25.5	10.5	6.0	9	1.4	500	Cross-section of Conductor: 10-16mm <sup>2</sup> AWG: 6 Maximum Current : I <sub>max</sub> =88A Wire range:10-16mm <sup>2</sup> A.W.G.:(6) Max.current:I <sub>max</sub> =88A
SNB14-4	4	#8	4.3																		
SNB14-5	5	#10	5.3																		
SNB14-6	6	1/4 "	6.5																		
SNB14-8	8	5/16 "	8.5	12	13.5	27.8	12	8.1	11.5	1.6	250	Cross-section of Conductor: 16-25mm <sup>2</sup> AWG: 4 Maximum Current : I <sub>max</sub> =115A Wire range:16-25mm <sup>2</sup> A.W.G.:(4) Max.current=115A									
SNB14-10	10	3/8 "	10.5																		
SNB22-5	5	#10	5.3																		
SNB22-6	6	1/4 "	6.5																		
SNB22-8	8	5/16 "	8.5	16.5	13.5	33.5	12	8.1	11.5	1.6	250	Cross-section of Conductor: 16-25mm <sup>2</sup> AWG: 4 Maximum Current : I <sub>max</sub> =115A Wire range:16-25mm <sup>2</sup> A.W.G.:(4) Max.current=115A									
SNB22-10	10	3/8 "	10.5																		

## ORDER INFORMATION

KLS8-01102 - SNB1.25~3

