



崇昇電機

TRONSUN MOTOR

MODEL:Φ7mm Coreless DC Motor

输出功率: 约 0.05~1.2W
贵金属电刷空心杯直流马达

OUTPUT: APPROX 0.05~1.2W
Precious Metal-brush Coreless DC Motor




典型应用:

遥控模型
电动玩具
电子产品

Typical Applications :

RC Models
Electronic toys
Mini electronic products

720-W

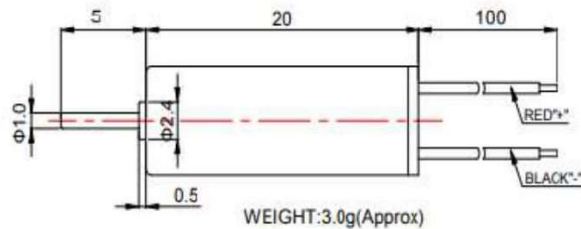

Customizable Parameters:
1. Length A and L
2. Electric Performance
3. Direction of Rotation
4. Eccentric Wheel is available



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT		
		V	rpm	A	rpm	A	g.cm	mN.m	W	g.cm	mN.m	A
0720-W-1	1.2~2.0	1.5	28000	0.05	22100	0.2	0.62	0.06	0.14	3.10	0.30	0.78
0720-W-2	1.5~3.5	3.0	37000	0.032	30100	0.14	0.75	0.07	0.23	4.05	0.4	0.61
0720-W-3	2.0~4.0	3.7	47500	0.075	35800	0.39	2.48	0.24	0.91	15.80	1.55	2.12