

Bulgin's extensive range of fuseholders are designed to give the degree of protection demanded in today's sophisticated electronic equipment. Carrying world-wide safety approvals from UL, VDE, CSA and IMQ, all types are manufactured from high grade flame retardant nylon and polyester materials.

411

418

419

420

422

423

Designed primarily for 5 x 20mm and 6.3 x 32mm size fuses with protection against shock to categories PC1, PC2 and PC3. There's a choice of styles for Inline, PCB mounting and panel mounting (screw or snap fit) with terminal options for solder, 2.8mm, 4.8mm or 6.3mm tabs or PC spills.Dust and waterproof designs provide a front of panel seal to IP68 in both 5 x 20mm and 6.3 x 32mm size fuses.

Fuse carrier styles include captive drawer, screw cap - with screw driver release, bayonet cap - with screw driver release and screw cap - with finger release.

Panel/PC Mounting Captive Carriers Touchproof, PC3 Panel Mounting Touchproof, Sealed to IP68, PC2 Panel Mounting Touchproof, Sealed to IP66, PC1 PC Mounting PC1, PC2 and PC3 Base Mounting, PC1 Inline PC1 and Inline Sealed to IP66, PC1

Fuseholders Protection Category



Category PC1:

No integral protection against electric shock. If required, Designers/ Manufacturers must provide additional protection against electric shock on equipment.

Category PC2:

With integral protection against electric shock. Fuseholders shall have live parts inaccessible to IEC 60529 Standard Test Finger, when fully assembled, without fuse carrier or fuse in place and when fuse carrier, with fuse is being inserted or withdrawn.

Category PC3:

With integral protection against electric shock. Fuseholders shall have live parts inaccessible to IEC 60529 1mm dia. rigid test wire when fully assembled, without fuse carrier or fuse in place and when fuse carrier, with fuse, is being inserted or withdrawn.





Specifications	FX0430/Termination	FX0430/PC
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	Captive Drawer	Captive Drawer
Terminations:	/28 (2.8mm solder), /48 (4.8mm tab), /63 (6.3mm tab)	/PC (PC spills)
Max. Rating:	10A, 250V (16A, 250V AC UL)	10A, 250V (16A, 250V AC UL)
Max. Power Dissipation:	2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	>10MΩ @ 500V DC	>10MΩ @ 500V DC
AC Breakdown:	>2kV	>2kV
Contact Resistance:	<10mΩ	<10mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings: Body/Drawer: Cap: Nut:	Nylon UL94V-0 rated	Nylon UL94V-0 rated
Contacts:	Contact tags: Brass, Tin Plated Fuse Clips: Phospher Bronze, Nickel	Contact tags: Brass, Tin Plated Fuse Clips: Phospher Bronze, Nickel Plated
Approvals:	Plated	
Accessories:		
Note:		
RoHS	Compliant	Compliant




Panel Mount			رم <u>Ø15.9</u> 2.4 40.0
FX0357	C FL C Ba Re	otection Category PC2 use Size 5 x 20mm ayonet Cap/Screwdriver elease NA, 250V (16A, 250V UL)	500 15.9 SQ 15.9 SQ
 Snap Fit to Panel			40.0
FX0367	Ful Ful Pa 2.1 Ba Re	otection Category PC2 ise Size 5 x 20mm anel Thickness 1.0 & 1.5 and 0 & 3.0mm ayonet Cap/Screwdriver elease IA, 250V (16A, 250V UL)	Ø 12.80±0.05 Fixing Details List No. FX0367/1 FX0369/1 FX0367/2 FX0369/2 2.0 & 3.0
Specifications	FX0357, FX0359	FX0367/Panel, FX0369/Panel	
Fuse Size:	5 x 20mm	5 x 20mm	
Panel Thickness:		/1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve)	
Fuse Carrier:	Bayonet cap/Screwdriver release	Bayonet cap/Screwdriver release	
Terminations:	Solder tags	Solder tags	
Max. Rating:	10A, 250V (16A, 250V AC UL)	10A, 250V (16A, 250V AC UL)	
Max. Power Dissipation:	2.5W (@ 23°C)	2.5W (@ 23°C)	
Insulation Resistance:	>10 ² MΩ @ 500V DC	>10 ² MΩ @ 500V DC	
AC Breakdown:	7kV @ 50Hz	7kV @ 50Hz	
Contact Resistance:	<10mΩ	<10mΩ	
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)	
Mouldings: Body: Cap: Nut:	Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Polyester UL94V-0 rated Nylon UL94V-0 rated	
Contacts:	Brass, Silver Plated	Brass, Silver Plated	
Approvals:	<i>91</i>	FL @ A	
Accessories:	P.No. 11327 (See page 378)	P.No. 11327 (See page 378)	
RoHS	Compliant	Compliant	



Panel Mount	54, FX0455	 Fuse S Screw Keywa D Pane 	tion Category PC2 ize 5 x 20mm Cap/Screwdriver Release y Panel Cutout (FX0454) I Cutout (FX0455) 50V (16A, 250V UL)	Pixing Details FX0455 Fixing Details FX0454 Fixing Details FX0454
Panel Mount	54/S, FX0455/S	 Fuse S Screw High P Keywa (FX045 D Pane 	tion Category PC2 ize 5 x 20mm Cap/Screwdriver Release rofile Bezel y Panel Cutout 4/S) el Cutout (FX0455/S) 50V (16A, 250V UL)	Ø12.80±0.05 Ø15.9 12.3 31.8 Fixing Details FX0455/S 5.6 MAX Panel 9 0 2.4 5.6 Thickness 0 012.80±0.05 015.9 10 MIN Panel 0 10 Thickness FX0454/S 10 Thickness
Snap Fit to Panel	FX0458	 Fuse S Panel S 2.0 & 3 Screw Releas 	Cap/Screwdriver	41.7 2.7 015.9 012.80±0.05 Panel Thickness Fixing Details List No. Panel Thickness FX0458/1 1.0 & 1.5 FX0458/2 2.0 & 3.0
Specifications	FX0454, FX0455		FX0454/S, FX0455/S	FX0458
Fuse Size:	5 x 20mm		5 x 20mm	5 x 20mm
Panel Size:				/1 (1.0-1.5mm panel, black sleeve) /2 (2.0-3.0mm panel, grey sleeve)
Fuse Carrier:	Screw cap/Screwdriver	release	Screw cap/Screwdriver release	Screw cap/Screwdriver release
Terminations:	Solder tags		Solder tags	Solder tags
Max. Rating:	10A, 250V (16A, 250V a	a.c. UL)	10A, 250V (16A, 250V AC UL)	10A, 250V (16A, 250V AC UL)
Max. Power Dissipation:	2.5W (@ 23°C)		2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	$>10^2 M\Omega @ 500 V d.c.$		>10 ² MΩ @ 500V DC	>10 ² MΩ @ 500V DC
A.C. Breakdown:	7kV @ 50Hz		7kV @ 50Hz	7kV @ 50Hz
Contact Resistance:	<10mΩ		<10mΩ	<10mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fus	e temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings:	Υ Γ	. ,	Polyester UL94V-0 rated	Polyester UL94V-0 rated
Body: Cap: Nut:	Polyester UL94V-0 rate Nylon UL94V-0 rated Glass Filled Nylon UL94		Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Nylon UL94V-0 rated
Cap:	Nylon UL94V-0 rated		-	Brass, Silver Plated
Cap: Nut:	Nylon UL94V-0 rated Glass Filled Nylon UL9		Glass Filled Nylon UL94V-0 rated	
Cap: Nut: Contacts:	Nylon UL94V-0 rated Glass Filled Nylon UL9 Brass, Silver Plated	4V-0 rated	Glass Filled Nylon UL94V-0 rated Brass, Silver Plated	Brass, Silver Plated




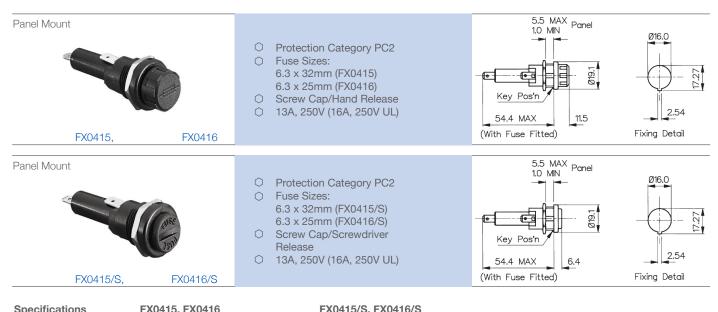

Specifications	FX0415, FX0416	FX0415/S, FX0416/S	
Fuse Size:	FX0415 - 6.3 x 32mm FX0416 - 6.3 x 25mm	FX0415/S - 6.3 x 32mm FX0416/S - 6.3 x 25mm	
Fuse Carrier:	Screw cap/Screwdriver release	Screw cap/Screwdriver release	
Terminations:	4.8 series tabs	4.8 series tabs	
Max. Rating:	13A, 250V (16A, 250V UL)	13A, 250V (16A, 250V UL)	
Max. Power Dissipation:	4W (@ 23°C)	4W (@ 23°C)	
Insulation Resistance:	>10 ⁵ MΩ @ 500V DC	>10 ⁵ MΩ @ 500V DC	
A.C. Breakdown:	4kV @ 50Hz	4kV @ 50Hz	
Contact Resistance:	<5mΩ	<5mΩ	
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)	
Mouldings: Body: Cap: Nut:	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Polyester UL94V-0 rated	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Polyester UL94V-0 rated	
Contacts:	Brass, Silver Plated	Brass, Silver Plated	
Approvals:	FI	FL	
Accessories:	P.No. 12932 (See page 378)	P.No. 12932 (See page 378)	
RoHS	Compliant	Compliant	

Fuseholders Panel Mounting, PC2



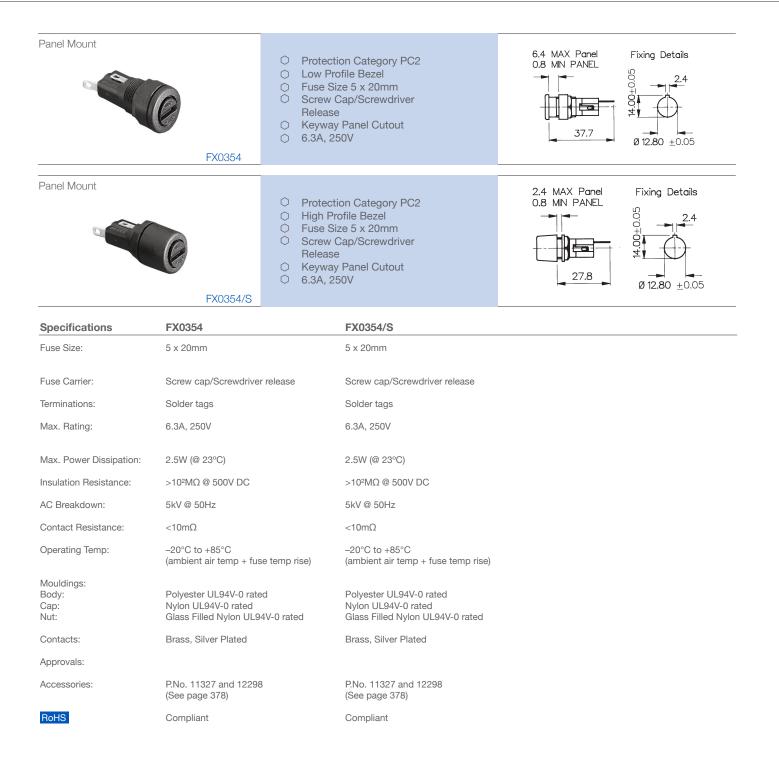





Key Features

- 6.3 x 32mm fuses
- Screwdriver slot knob
- PC2 protection category
- 4.8, 6.3 and solder terminals
- C Low profile bezel
- Snap in or threaded bushing mounting options

Approvals and specifications


S 10A 250V (max fuse rating*) T–55 to T+70 (ambient) Maximum dissipation wattage: 4W

N I6A UL 250V UL file E92075 CSA file LR44770

These products comply with safety category PC2. *Users should be aware of the de-rating factors published by specialist manufacturers of fuses.


Fuseholders with Inline termination have combination (4.8/6.3) terminals. It has not been possible to show both views here. Units with right angle terminals have user specified end terminals and combination mid-body terminals.



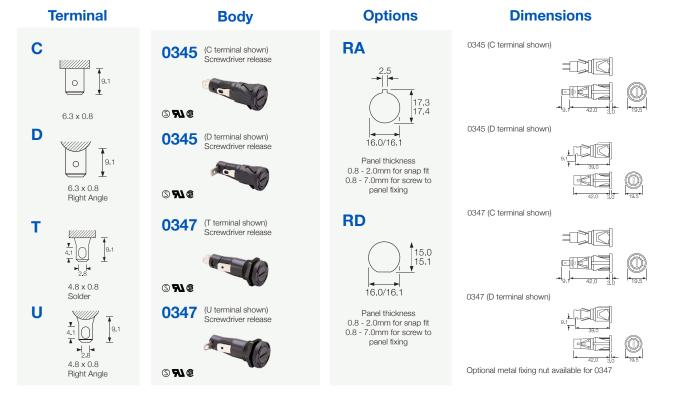

Fuseholders Panel Mounting, PC1



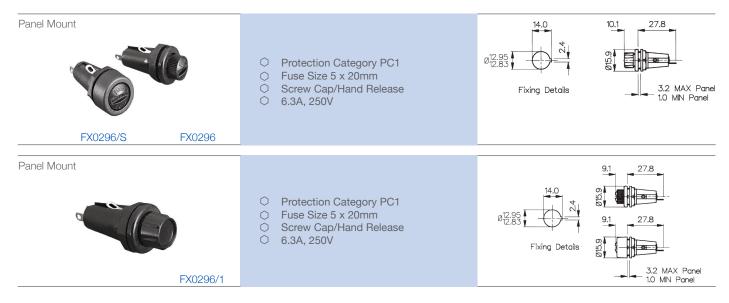


Specifications	FX0296, FX0296/S	FX0296/1
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	FX0296 Screw cap/Hand release FX0296/S Screw cap/Screwdriver release	Screw cap/Hand release
Terminations:	Solder tags	Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V
Max. Power Dissipation:	2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	>10 ⁵ MΩ @ 500V DC	>10 ⁵ MΩ @ 500V DC
AC Breakdown:	2.5kV @ 50Hz	2.5kV @ 50Hz
Contact Resistance:	<5mΩ	<5mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	-20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings: Body: Cap: Nut:	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated
Contacts:	Brass, Silver or Tin Plated	Brass, Silver or Tin Plated
Accessories	P.No. 9820 (See page 378)	P.No. 9820 (See page 378)
RoHS	Compliant	Compliant



Panel Mount				
	FX0419	TouchpFuse S		59.3 3.8 Hex Nut 21.0 A/C 8.0 Max Panel
Panel Mount				
	FX0462	TouchpFuse S		Ø15.9 3.1 41.5 B.7 Mox Panel Fixing Details
Panel Mount				Ø12.80±0.05
	FX0463	 Touchp Fuse S High Pr 		Ø15.9 5.60 Max Panel S.60 Max Panel S.60 Max Panel
Specifications	FX0419		FX0462	FX0463
Fuse Size:	6.3 x 32mm		5.0 x 20mm	5.0 x 20mm
Fuse Carrier:	Screw cap/Screwdriver/I	Hand release	Screw cap/Screwdriver/Hand release	Screw cap/Screwdriver/Hand release
Terminations:	6.3 series tabs		Solder tags	Solder tags
Max. Rating:	16A, 250V AC		10A, 250V AC	10A, 250V AC
Max. Power Dissipation:	2.5W (@ 23°C)		2.5W (@ 23°C)	2.5W (@ 23°C)
Insulation Resistance:	>10 ⁶ MΩ @ 500V DC		>10 ² MΩ @ 500V DC	>10 ² MΩ @ 500V DC
A.C. Breakdown:	>2kV @ 50Hz		>7kV @ 50Hz	>7kV @ 50Hz
Contact Resistance:	<10mΩ		<10mΩ	<10mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse	temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings:				Deliverter LII 041/ 0 reted
Body: Cap:	Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V		Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Polyester UL94V-0 rated Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated
Body: Cap: Nut: Contacts:	Nylon UL94V-0 rated		Nylon UL94V-0 rated	Nylon UL94V-0 rated
Body: Cap: Nut: Contacts: Tightening Torque: Cap:	Nylon UL94V-0 rated Glass Filled Nylon UL94	V-0 rated	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated
Body: Cap: Nut: Contacts: Tightening Torque: Cap: Panel Nut:	Nylon UL94V-0 rated Glass Filled Nylon UL94V Brass, Silver Plated 0.5 - 0.6Nm (4.43-5.3lbf.	V-0 rated in.)	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.)	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.)
Body: Cap: Nut: Contacts: Tightening Torque: Cap: Panel Nut: Sealing:	Nylon UL94V-0 rated Glass Filled Nylon UL94V Brass, Silver Plated 0.5 - 0.6Nm (4.43-5.3lbf. 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+/	V-0 rated in.)	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.) 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+A2:2013	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.) 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+A2:2013
Body: Cap: Nut: Contacts: Tightening Torque: Cap: Panel Nut: Sealing: Accessories: Approvals:	Nylon UL94V-0 rated Glass Filled Nylon UL94V Brass, Silver Plated 0.5 - 0.6Nm (4.43-5.3lbf. 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+/	V-0 rated in.) A2:2013	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.) 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+A2:2013 (10m for 2weeks)	Nylon UL94V-0 rated Glass Filled Nylon UL94V-0 rated Brass, Silver Plated 0.4 - 0.6Nm (3.54-5.3lbf.in.) 0.5Nm (4.4lbf.in.) IP68 to EN60529:1992+A2:2013 (10m for 2weeks)



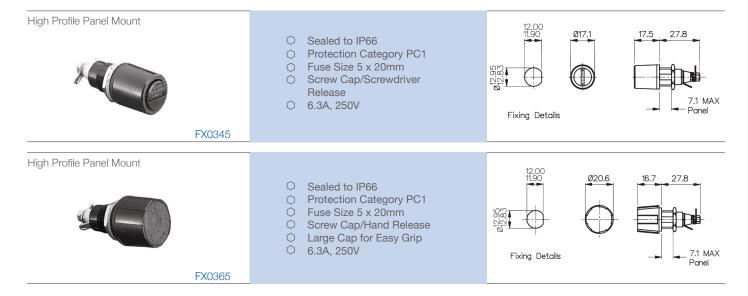

Specifications	FX0345, FX0345/A	FX0365, FX0365/A
Fuse Size:	5 x 20mm	5 x 20mm
Fuse Carrier:	Screw cap/Screwdriver release	Screw cap/Screwdriver release
Terminations:	Solder tags	Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V
Max. Power Dissipation:	4W (@ 23°C)	4W (@ 23°C)
Insulation Resistance:	>10 ³ MΩ @ 500V DC	>10³MΩ @ 500V DC
AC Breakdown:	>3.5kV @ 50Hz	>3.5kV @ 50Hz
Contact Resistance:	<10mΩ	<10mΩ
Operating Temp:	–20°C to +85°C (ambient air temp + fuse temp rise)	–20°C to +85°C (ambient air temp + fuse temp rise)
Mouldings: Body & Cap: Spacer: Insulating Sleeve:	Glass Filled Nylon UL94V-0 rated Glass Filled Nylon UL94HB rated Nylon UL94V-0 rated	Glass Filled Nylon UL94V-0 rated Glass Filled Nylon UL94HB rated Nylon UL94V-0 rated
Contacts:	Brass, Silver Plated	Brass, Silver Plated
Sealing:	Protection Classification IP66 to EN6052 Retains sealing integrity with cap remove	9:1992+A2:2013 ed since they are both panel and barrier sealed
Variants: RoHS	/A Silicone 'O' ring, Op. Temp. –55°C to +85°C Compliant	/A Silicone 'O' ring, Op. Temp. –55°C to +85°C Compliant

Fuseholders PC Mounting PC1, PC2 and PC3



PC Horizontal Mount		 Protection Category PC3 Fuse Size 5 x 20mm Screw Cap/Screwdriver Release Captive Fuse Carrier PC Spills 10A, 250V (16A, 250V UL) 	35.0 3.4 5.08 15.24 P.C.B. Fixing Detail	
PC Horizontal and Vertic		 Protection Category PC2 Fuse Sizes 5 x 20mm Bayonet Cap/Screwdriver Release 10A, 250V 	12.5 SQ 35.1 1.0 10.00 SQ 8.0 5.0 2 Holes Ø 1.3 2.3 Fixing Details	
PC Horizontal Mount		 Protection Category PC1 Fuse Size 5 x 20mm Two or Three PC Spills Screw Cap/Hand Release 6.3A, 250V 	12.70 CRS Ø127±0.05 g Fixing Details 9 g G G G G G G G G G G G G G G G G G G	
FX0		< 0.3A, 230V	15.24 CRS 01.27±0.05 Position of Twin Spills	
FX0 Specifications		FX0456 FX0457	15 24 CRS Ø1.27±0.05	
	330 FX0342		15.24 CRS 0127±0.05 Position of Twin Spills	
Specifications	330 FX0342 FX0461	FX0456 FX0457 5 x 20mm	15.24 CRS 0127±0.05 Position of Twin Spills	
Specifications Fuse Size:	330 FX0342 FX0461 5 x 20mm	FX0456 FX0457 5 x 20mm	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills	
Specifications Fuse Size: Fuse Carrier:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release	FX0330 FX0342 5 x 20mm Screw cap/Hand release	
Specifications Fuse Size: Fuse Carrier: Terminations:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0332 - 2 PC Spills	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL)	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C)	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C)	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C)	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C) >10MΩ @ 500V DC	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10²MΩ @ 500V DC	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V DC	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: AC Breakdown:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C) >10MΩ @ 500V DC >2kV	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10²MΩ @ 500V DC 4kV @ 50Hz <10mΩ	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V DC 6kV @ 50Hz	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: AC Breakdown: Contact Resistance:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C) >10MΩ @ 500V DC >2kV <10mΩ	FX0456 FX0457 5 x 20mm Bayonet cap/Screwdriver release PC Spills 10A, 250V 2.5W (@ 23°C) >10²MΩ @ 500V DC 4kV @ 50Hz <10mΩ	FX0330 FX0342 5 x 20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V DC 6kV @ 50Hz <5mΩ	
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: AC Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C) >10MΩ @ 500V DC >2kV <10mΩ	<th 1001<<="" color="" is="" td=""><td>FX0330 FX0342FX0330 FX03425 x 20mmScrew cap/Hand releaseFX0330 - 3 PC SpillsFX0342 - 2 PC Spills6.3A, 250V2.5W (@ 23°C)>10⁴MΩ @ 500V DC6kV @ 50Hz<5mΩ-20°C to +85°C(ambient air temp + fuse temp rise)Glass Filled Nylon UL94V-0 rated</td></th>	<td>FX0330 FX0342FX0330 FX03425 x 20mmScrew cap/Hand releaseFX0330 - 3 PC SpillsFX0342 - 2 PC Spills6.3A, 250V2.5W (@ 23°C)>10⁴MΩ @ 500V DC6kV @ 50Hz<5mΩ-20°C to +85°C(ambient air temp + fuse temp rise)Glass Filled Nylon UL94V-0 rated</td>	FX0330 FX0342FX0330 FX03425 x 20mmScrew cap/Hand releaseFX0330 - 3 PC SpillsFX0342 - 2 PC Spills6.3A, 250V2.5W (@ 23°C)>10 ⁴ M Ω @ 500V DC6kV @ 50Hz<5m Ω -20°C to +85°C(ambient air temp + fuse temp rise)Glass Filled Nylon UL94V-0 rated
Specifications Fuse Size: Fuse Carrier: Terminations: Max. Rating: Max. Power Dissipation: Insulation Resistance: AC Breakdown: Contact Resistance: Operating Temp: Mouldings: Body: Cap: End Bung:	330 FX0342 FX0461 5 x 20mm Screw cap/Screwdriver release PC Spills 10A, 250V (16A, 250V AC UL) 1.6W (@ 23°C) >10MΩ @ 500V DC >2kV <10mΩ	<th 1001<<="" color="" is="" td=""><td>FX0330 FX0342 FX0330 FX0342 5×20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10⁴MΩ @ 500V DC 6kV @ 50Hz <5mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated</td></th>	<td>FX0330 FX0342 FX0330 FX0342 5×20mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10⁴MΩ @ 500V DC 6kV @ 50Hz <5mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated</td>	FX0330 FX0342 FX0330 FX0342 5×20 mm Screw cap/Hand release FX0330 - 3 PC Spills FX0342 - 2 PC Spills 6.3A, 250V 2.5W (@ 23°C) >10 ⁴ MΩ @ 500V DC 6kV @ 50Hz <5mΩ -20°C to +85°C (ambient air temp + fuse temp rise) Glass Filled Nylon UL94V-0 rated Nylon UL94V-0 rated


Fuseholders PC and Base Mounting, PC1



PC Mount	۲X0321	 Protection Category PC1 Fuse Size 5 x 20mm PC Spills 6.3A, 250V 	2 Holes Ø 2.0 22.90 CRS 22.90 CRS Fixing Details
Base Mount	FX0267	 Protection Category PC1 Fuse Size 5 x 20mm Solder Tags 6.3A, 250V 	37.5 G Fixing Hole Ø 2.3 23.4
Base Mount	FX0360	 Protection Category PC1 Fuse Size 5 x 20mm Solder Tags 6.3A, 250V 	Fixing Hole Ø 3.2 C/SK Ø 5.2 x 1.0 Deep 4.57 CRS 0 3.2 Ø 3.2 Ø 1.83 MAX Ø 1.73 MIN ¢ of Fuseholder Fixing Details
Specifications	EV0204	EV0067	EVO260
Specifications Fuse Size:	FX0321	FX0267	FX0360
Terminations:	5 x 20mm PC Spills	5 x 20mm Solder tags	5 x 20mm Solder tags
Max. Rating:	6.3A, 250V	6.3A, 250V	6.3A, 250V
Insulation Resistance:	>10 ⁵ MΩ @ 500V DC	>10 ⁵ MΩ @ 500V DC	>10 ⁴ MΩ @ 500V DC
AC Breakdown:	7kV @ 50Hz (Clip to clip)	1.5kV @ 50Hz	2kV @ 50Hz
Contact Resistance:	<10mΩ	<10mΩ	<10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	–20°C to +85°C	–20°C to +85°C	-20°C to +85°C
Base Material:	Glass Filled Nylon UL94V-0 ra	ated Glass Filled Nylon UL94V-0 rated	Glass Filled Nylon UL94HB rated
Contacts:	Phospher Bronze, Tin Plated	Phospher Bronze, Tin Plated	Phospher Bronze, Tin Plated
Accessories:	P.No. 12760 (See page 378)	P.No. 12760 (See page 378)	
RoHS	Compliant	Compliant	Compliant

Fuseholders Base Mounting, PC1



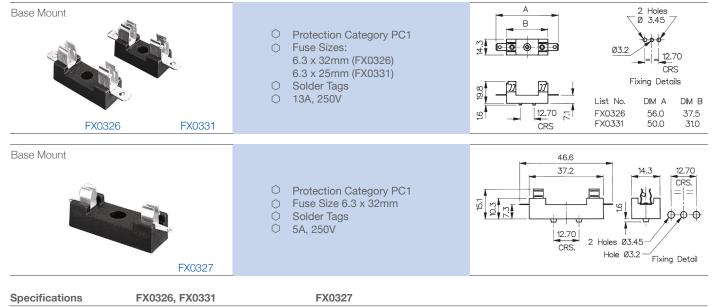

Specifications	FX0326, FX0331	FX0327
Fuse Size:	FX0326 - 6.3 x 32mm FX0331 - 6.3 x 25mm	6.3 x 32mm
Terminations:	6.3 series tabs	Solder tags
Max. Rating:	13A, 250V	5A, 250V
Insulation Resistance:	>10 ⁴ MΩ @ 500V DC	>10 ⁵ MΩ @ 500V DC
A.C. Breakdown:	5kV @ 50Hz	5kV @ 50Hz
Contact Resistance:	<5mΩ	<10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	–20°C to +85°C	–20°C to +85°C
Base Material:	Glass Filled Polyester UL94V-0 rated	Glass Filled Polyester UL94V-0 rated
Contacts:	Clips: Phospher Bronze, Tin Plated Tabs: Brass, Tin Plated	Phospher Bronze, Tin Plated
RoHS	Compliant	Compliant



	 Protection Category PC1 Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm Screw Terminal (Solder to order) 10A, 50V (250V Inaccessible) UL Approved (Black Only) Clear or black 	A Cable Entry Ø 4.8 List No. DIM A FX0180 60.3 FX0280 54.5 FX0380 48.6
Inline FX0185, F	 Sealed to IP66 Protection Category PC1 Fuse Sizes 5 x 20mm, 6.3 x 25mm and 6.3 x 32mm Screw Terminal (Solder to order) 10A, 50V (250V Inaccessible) UL Approved (Black Only) Clear or black 	A Stage 1 Stage 2 Stage 3 FX0185 FX0285 Stage 78.7 +/-0.9
Specifications	FX0180/Colour, FX0280/Colour, FX0380/Colour	FX0185/Colour, FX0285/colour, FX0385/Colour
Fuse Size:	5 x 20mm FX0380 6.3 x 25mm FX0280 6.3 x 32mm FX0180	5 x 20mm FX0385 6.3 x 25mm FX0285 6.3 x 32mm FX0185
Cable Acceptance:	1mm ² conductor (max.)	1mm2 conductor (max.) 1mm to 2.64mm overall diameter Stepped grommet: Stage 1: 1.00mm to 1.40mm Stage 2: 1.50mm to 1.90mm Stage 3: 2.0mm to 2.64mm
Terminations:	Screw terminal (solder to order)	Screw Terminal (solder to order)
Max. Rating:	10A, 50V (250V where inaccessible inside equipment)	10A, 50V (250V where inaccessible inside equipment)
Insulation Resistance: High Voltage Proof Test: Contact Resistance:	>10 ⁵ MΩ @ 500V DC 2kV (50Hz for 1 minute) <10mΩ	>10⁵ MΩ @ 500V DC 2kV (50Hz for 1 minute) <10mΩ
Operating Temp: (ambient air temp + fuse temp rise)	-20°C to +90°C	-20°C to +70°C
Sealing:		Protection Classification IP66 EN60529: 1992+A2:2013
Screw Tightening Torque	0.226Nm (2lb/in)	0.226Nm (2lb/in)
Mouldings: Body - Clear: Body - Black: Grommet: O Ring: Contacts:	Polybutene UL94HB rated Nylon 6 UL94V-0 rated	Polybutene UL94HB rated Nylon 6 UL94V-0 rated PVC Nitrile
Contacts: Terminals: Grub Screw:	Brass, Nickel Plated Stainless Steel	Brass, Nickel Plated Stainless Steel
Approvals:	R (Black version only)	(Black version only)
Colour: RoHS	Clear - no suffix, /BK - Black Compliant	Clear - no suffix, /BK - Black Compliant

Fuseholders Accessories



Insualtion Boots	 Provide Insulation against Shock on Rear of Fuseholder PVC UL94V-0 rated flame retardant material 	9820 971 9820 9820 9820 971 9820 9820 9820 9820 9820 9820 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 9820 971 971 972 972 972 972 972 972 972 972
Insualtion Cover	 Provide Insulation from Live Parts on Fuseholder Clear Polycarbonate 	2 Holes Ø 3.0 9 29.0 12760
Adaptor PNo. 12297	 Adaptor to Convert Fixing Holes Maintains Anti-Rotation Glass Filled Nylon 	1.3 Ø17.5 12297

Accessories	For Use With:
P.No. 9820 (Boot)	FX0296, FX0296/1, FX0296/S
P.No. 11327 (Boot)	FX0354, FX0354/S, FX0357, FX0359, FX0454, FX0454/S, FX0455, FX0455/S, FX0460, FX0458, FX0369, FX0462, FX0463
P.No. 12932 (Boot)	FX0415, FX0415/S, FX0416, FX0416/S
P.No. 12760 (Cover)	FX0267, FX0321
Max. Working Voltage:	250V AC
Flash Tested to:	2kV AC
Material:	P.Nos. 9820, 11327, 12932: PVC - UL94V-0 P.No. 12760: Polycarbonate
P.No. 12297 (Adaptor Washer)	Adapts 'D' fixing to anti-rotation Key Fixing FX0455, FX0455/S
Material:	Glass Filled Nylon
RoHS	Compliant