

SERIES 04
4PST

FEATURES


- Joy Stick Action
- Position Locator On CRT Screens
- Moves Cursor On Menu Display



DIMENSIONS In Inches (and millimeters)

Basic Switch


04A

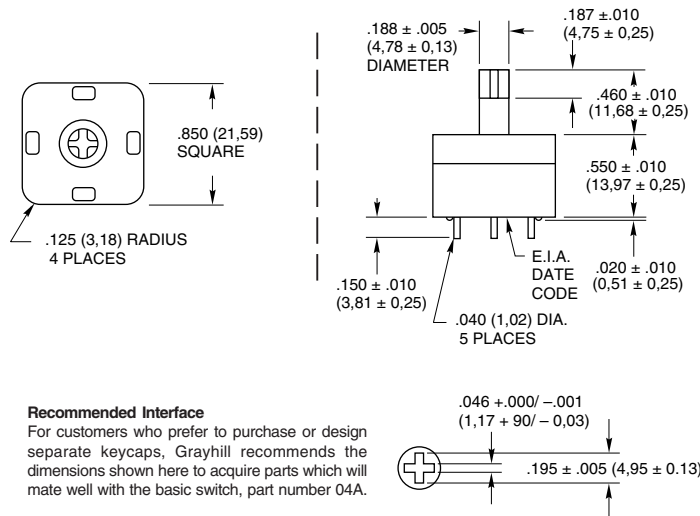

Recommended Interface
 For customers who prefer to purchase or design separate keycaps, Grayhill recommends the dimensions shown here to acquire parts which will mate well with the basic switch, part number 04A.


Bat Handle

04A-B01



Keycap

04A-K01



SPECIFICATIONS


Rating Criteria

- Rated:** Make and break 250 mA at 115 Vac or 125 mA at 220 Vac resistive load for 500,000 operations
- Contact Resistance:** 25 milliohms maximum on a new switch
- Insulation Resistance:** 1,000 megohms at 100 Vdc
- Dielectric Strength:** 500 Vac RMS minimum
- Operating Temperature:** -40°C to +85°C

Materials and Finishes

- Base, Cover and Switch Actuator:** Polyester (Black)
- Terminals:** Brass, gold-plated over nickel
- Shorting Bar:** Phosphor bronze, gold-plated over nickel
- Spring:** Tinned music wire
- Keycap:** ABS or equivalent
- Bat-Handle:** ABS

CIRCUITRY

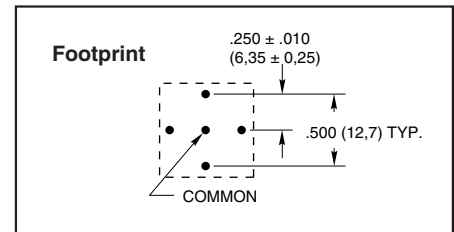

ORDERING INFORMATION

Description	Part No.
Basic Switch	04A
Switch with Arrowhead Keycap	04A-K01
Switch with Bat-Handle	04A-B01*

*Shipped with bat handle permanently attached.

Available from your local Grayhill Distributor.
 For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Pushbutton Switches