

NOT RECOMMENDED FOR NEW DESIGN USE AP431S



AS431I

LOW CATHODE CURRENT ADJUSTABLE PRECISION SHUNT REGULATOR

Description

The AS431I is a three-terminal adjustable shunt regulator with guaranteed thermal stability over a full operation range. It features sharp turn-on characteristics, low temperature coefficient and low output impedance, which make it ideal substitute for Zener diode in applications such as switching power supply, charger and other adjustable regulators.

The output voltage of AS431I can be set to any value between V_{REF} (2.5V) and the corresponding maximum cathode voltage (36V).

The AS431I is offered in two grade initial voltage tolerance at $+25^{\circ}$ C, 0.5%, and 1%.

This IC is available in 3 packages: TO-92 (bulk or ammo packing), SOT-23 and SOT-89.

Features

- Programmable Precise Output Voltage from 2.5V to 36V
- High Stability Under Capacitive Load
- Low Minimum Cathode Current for Regulation: 10μA (Typ.), 50μA (Max.)
- Low Temperature Deviation: 4.5mV Typical
- Sink Current Capacity from 50µA to 100mA
- Low Output Noise
- Wide Operating Range: -40 to +125°C
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)


Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference

Notes:


- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/663/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Pin Assignments

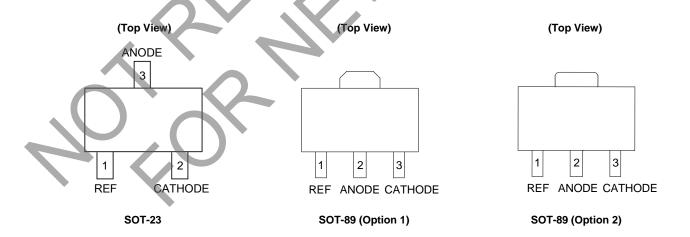




Pin Assignments (Cont.)

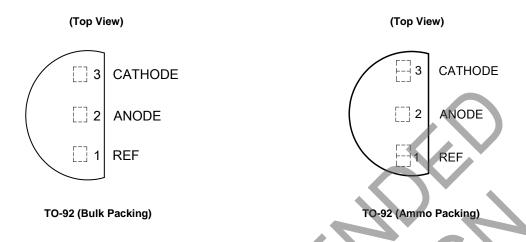


Typical Applications Circuit

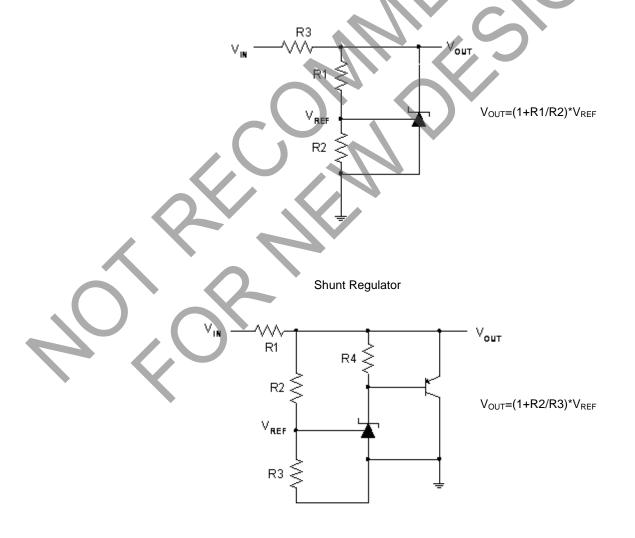

High Current Shunt Regulator



Typical Applications Circuit (Cont.)

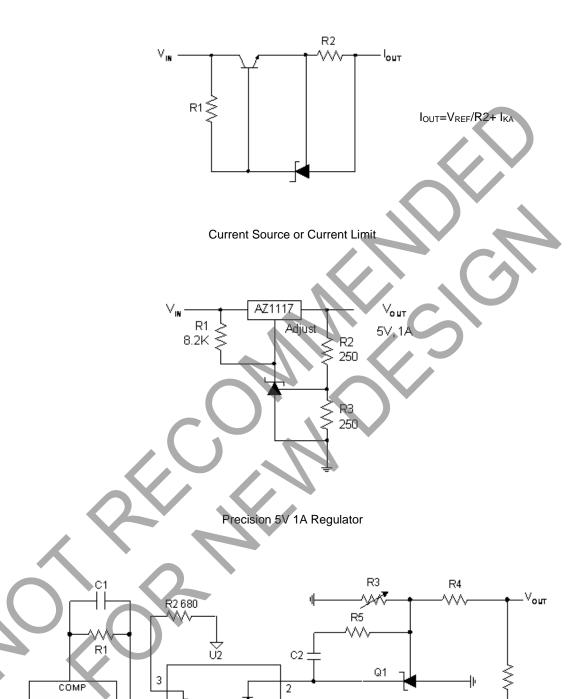


PWM Converter with Reference

PS521

PVVM Controller



Functional Block Diagram

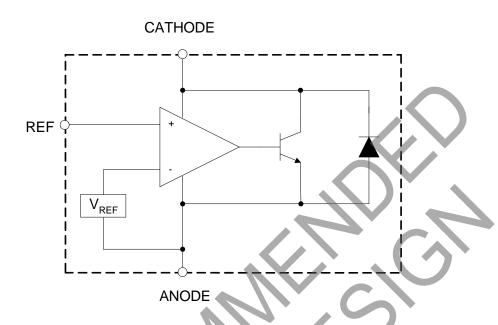

Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Rating	Rating		
Vka	V _{KA} Cathode Voltage 40				
I _{KA}	Cathode Current Range (Continuous)	-100 to 150		mA	
I _{REF}	Reference Input Current Range	10		mA	
		TO-92	770		
P _D	Power Dissipation	SOT-89	770	mW	
		SOT-23	370		
TJ	Junction Temperature	+150		°C	
T_{STG}	Storage Temperature Range	-65 to +150		°C	
ESD	ESD (Human Body Model)	2000	٧		

Note 4: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{KA}	Cathode Voltage	V _{REF}	36	V
I _{KA}	Cathode Current	0.05	100	mA
T _A	Operating Ambient Temperature Range	-40	+125	°C




Electrical Characteristics (Operating Conditions: T_A = +25°C, unless otherwise specified.)


Symbol	Parame	ter	Test Circuit	Conditions		Conditions		Conditions		Min	Тур	Max	Unit
.,	5 ()()	0.5%		$V_{KA} = V_{REF}$, $I_{KA} = 10mA$		2.487	2.500	2.512					
V_{REF}	Reference Voltage	1.0%	4			2.475	2.500	2.525	V				
				0 to +70°C		_	4.5	8					
ΔV_{REF}	Deviation of Reference Voltage Over Full Temperature Range		4	$V_{KA} = V_{REF},$ $I_{KA} = 10mA$	-40 to +85°C	_	4.5	10	mV				
					-40 to +125°C	(-/)	4.5	16					
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	Ratio of Change in R Voltage to the Chang		5	5 $I_{KA} = 10 \text{mA}$ $\Delta V_{KA} = 10 \text{V}$ to V_{REF}			-1.0	-2.7	mV/V				
	Voltage				/-	-0.5	-2.0						
I _{REF}	Reference Current		5	5 I _{KA} = 10mA, R1 = 10kΩ, R2 = ∞			0.035	0.5	μΑ				
ΔI_{REF}	Deviation of Reference Current Over Full Temperature Range		5	I_{KA} = 10mA, R1 = 10kΩ, R2 = ∞, T_A = -40 to +125°C		_	0.03	0.3	μΑ				
I _{KA} (Min)	Minimum Cathode Current for Regulation		4	V _{KA} = V _{REF}			10	50	μΑ				
I _{KA} (Off)	Off-state Cathode Cu	ırrent	6	$V_{KA} = 36V, V_{R}$) - `	0.05	1.0	μΑ					
Z _{KA}	Dynamic Impedance		4	$V_{KA} = V_{REF}, I_{K}$ $f \le 1.0 \text{kHz}$	_	0.15	0.5	Ω					
	Thermal Resistance			TO-92			68						
θјс				SOT-89		_	29	_	°C/W				
				SOT-23		_	113	-					




Electrical Characteristics (Cont.)



Test Circuit 4 for V_{KA} = V_{REF}



Test Circuit 5 for V_{KA} > V_{REF}




Test Circuit 6 for I_{OFF}




Performance Characteristics


Reference Voltage vs. Ambient Temperature




Cathode Current vs. Cathode Voltage




Off-state Cathode Current vs. Ambient Temperature




Reference Current vs. Ambient Temperature



Cathode Current vs. Cathode Voltage




Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage







Performance Characteristics (Cont.)


Small Signal Voltage Gain vs. Frequency







Stability Boundary Conditions vs. Load Capacitance






Pulse Response of Input and Output Voltage








Ordering Information

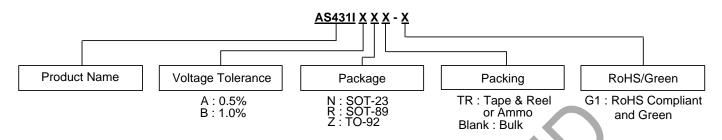

Package	Temperature Range	Voltage Tolerance	Part Number	Marking ID	Packing
007.00	40.15.40500	0.5%	AS431IANTR-G1	GB9	3000/Tape & Reel
SOT-23	-40 to +125°C	1.0%	AS431IBNTR-G1	GC9	3000/Tape & Reel
		0.5%	AS431IAZ-G1	AS431IAZ-G1	1000/Bulk
	92 -40 to +125°C	0.5%	AS431IAZTR-G1	AS431IAZ-G1	2000/Ammo
TO-92		1.0%	AS431IBZ-G1	AS431IBZ-G1	1000/Bulk
		1.0% AS431IBZTR-G1 AS431IBZ-G1	AS431IBZ-G1	2000/Ammo	
207.00	0.5% AS431IARTR-G1 G43J		G43J	1000/Tape & Reel	
SOT-89	-40 to +125°C	1.0%	AS431IBRTR-G1	G43K	1000/Tape & Reel


Marking Information

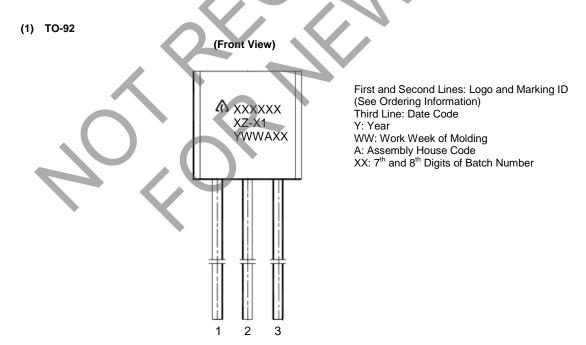



Marking Information (Cont.)




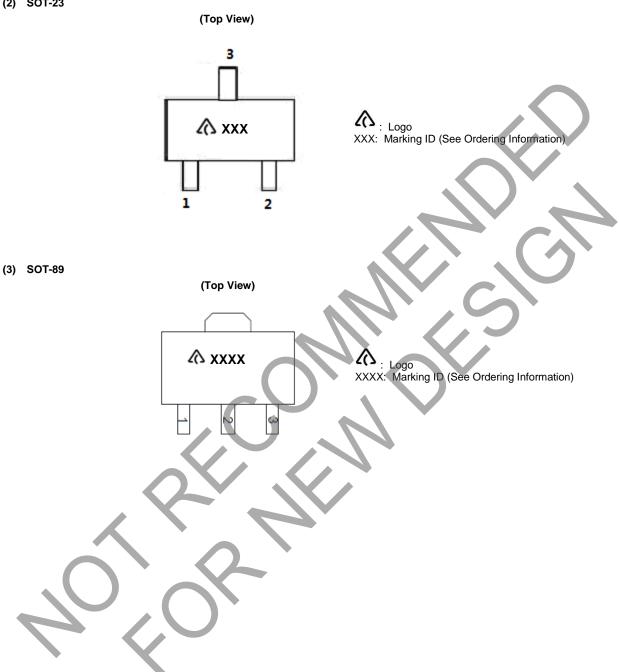



Package Outline Dimensions (All dimensions in mm(inch).)


(1) Package Type: TO-92 (Bulk Packing)

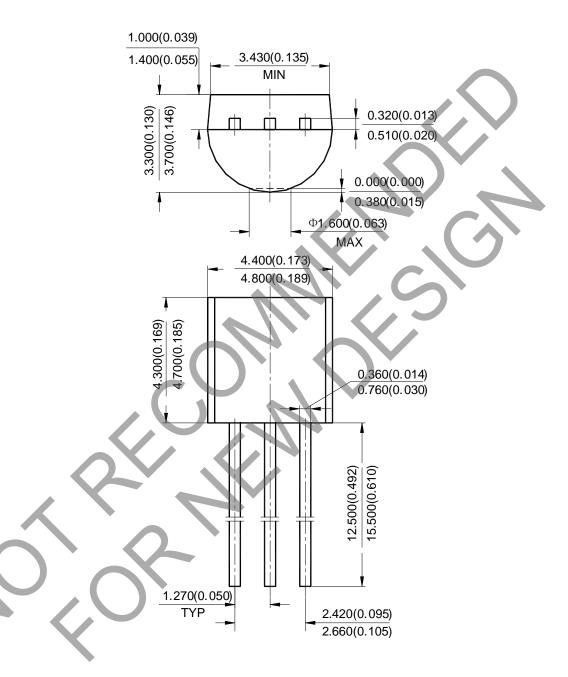



Package Outline Dimensions (Cont. All dimensions in mm(inch).)


(2) Package Type: TO-92 (Ammo Packing)

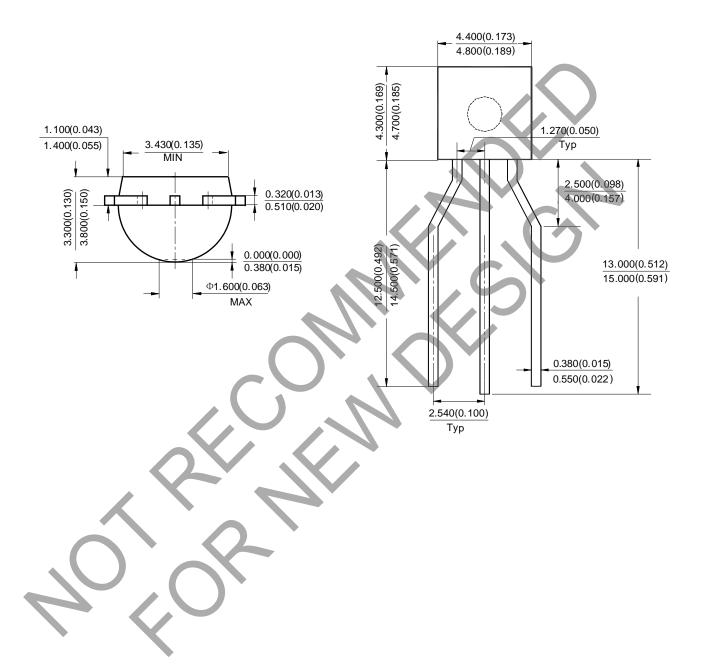



Package Outline Dimensions (Cont. All dimensions in mm(inch).)


(3) Package Type: SOT-23

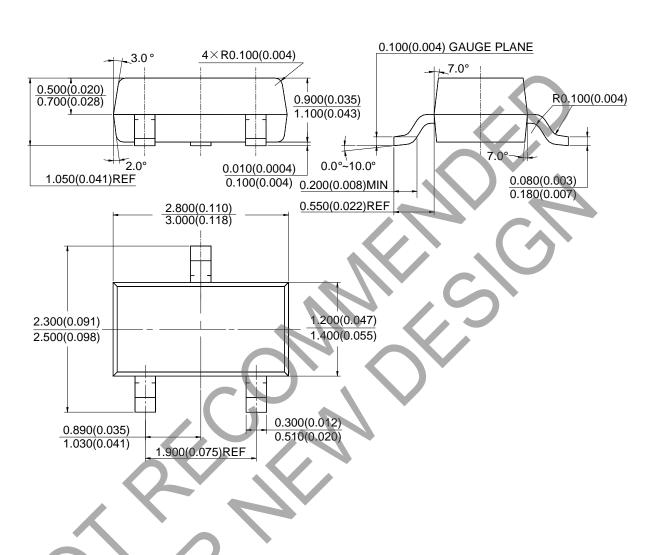



Package Outline Dimensions (Cont. All dimensions in mm(inch).)


(4) Package Type: SOT-89

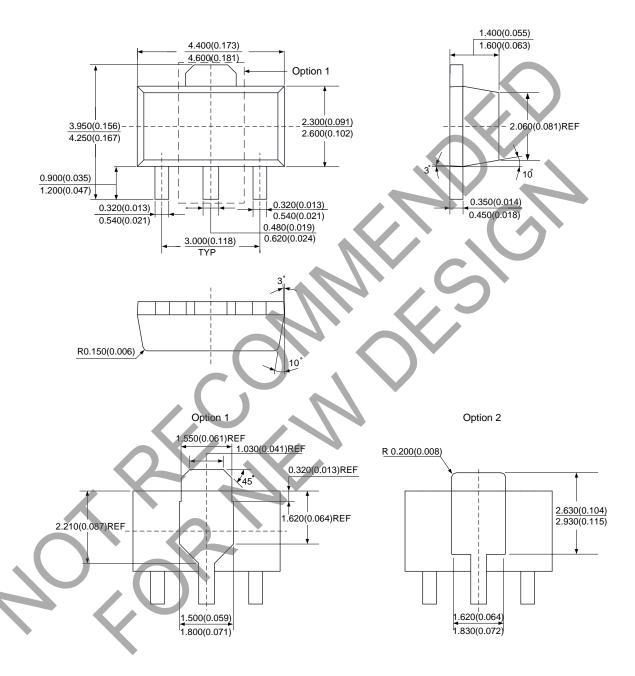



Suggested Pad Layout

(1) Package Type: SOT-23

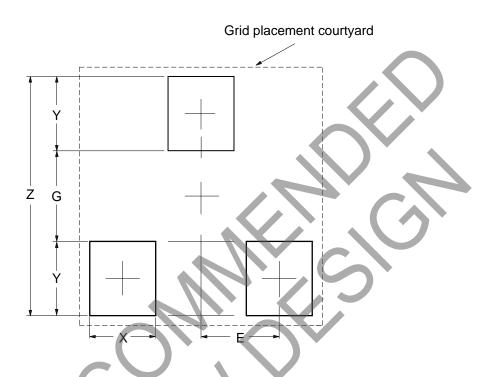


Dimensions	Z	G	X	Y	E
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	2.900/0.114	1.100/0.043	0.800/0.031	0.900/0.035	0.950/0.037



Suggested Pad Layout (Cont.)

(2) Package Type: SOT-89

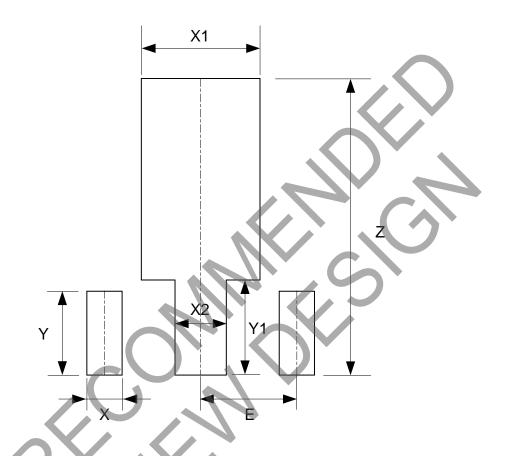

Dimensions	Dimensions	Z	Х	X1	X2	Υ	Y1	Е
	(mm)/(inch)							
	Value	4.600/0.181	0.550/0.022	1.850/0.073	0.800/0.031	1.300/0.051	1.475/0.058	1.500/0.059



NOT RECOMMENDED FOR NEW DESIGN USE AP431S

AS431I

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com