



Easy-to-read Tiny Display

Charging current, battery power and charging status are clearly showed.

Compatible with all 5V USB power including USB wall adaptors, cell phone chargers, solar panel, PC USB, power banks, etc.

Tiny but Mighty

Ultra compact design with greatest compatibility.

3.6V/3.7V Li-ion / IMR / INR / ICR:

10440 14500 14650 16340 17335 17500 17670 18350
18490 18500 18650 18700 20700 21700 22650 25500
26650

*Max space for 1x26650(Flat top)+1x21700
(Flat top)

*Can not charger button top 26650 cells

*Can not charger protected 20700/21700
cells



Intelligent Recognition

Automatically choose suitable charging current (0.5A or 1.0A) to maximize the battery lifespan.





Micro USB Charging Port

Charge Everywhere.

Compatible with all 5V USB power including USB wall adaptors, cell phone chargers, solar panel, PC USB, power banks, etc.



computer



power
line



power
bank



0V Activation Function

Recharge a “damaged” (Low voltage) battery. Recondition and refresh old or over-discharged batteries.



[+ Learn more](#)

The Safest Charger

Safe, Durable and Peace of Mind.



CE, FCC, RoHS certified.

1 year warranty.

Extra-low safe input voltage.


Temperature monitoring.

Flame retardant material.

Reverse polarity and short circuit protection.

Battery Life Optimization Charging

Accurate cut-off, efficient charging and never over charge batteries.

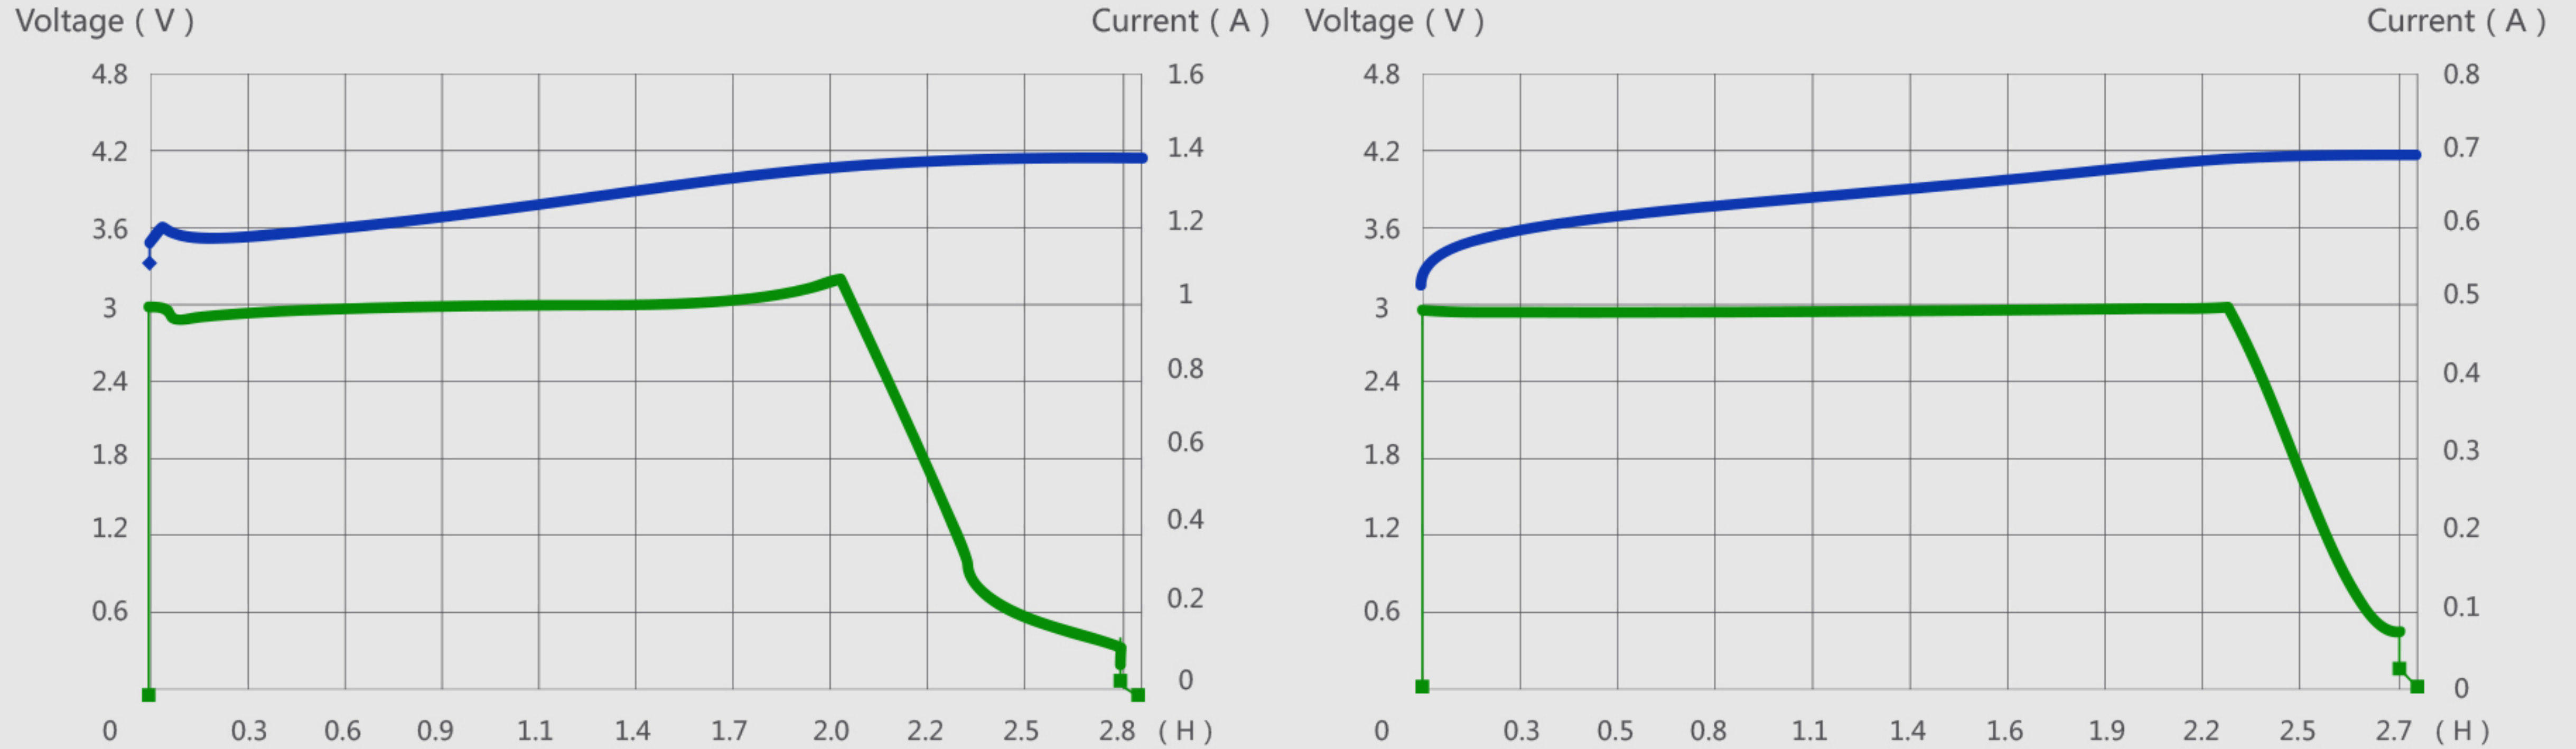

Li-ion: XTVTC4/2200mAh-1.0A

Li-ion: XTAR18500/1100mAh-0.5A

◆ Voltage
■ Current

ANT MC1 Plus 参数

Model	ANT MC1 Plus
Input	DC 5V 1A
0.5A Constant Current	0.5A x 1
1A Constant Current	1A x 1
End of Charge Voltage	4.20±0.05V
End of Charge Current	≤120mA
Operating Temperature	0-40°C
Size	L92mm x W27mm x H26mm
Net Weight	27g

Package Contents

ANT MC1 Plus charger, USB cable,
Hop-pocket, Manual, Warranty card.

