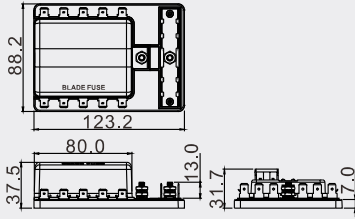







R3-76B-01-3  110 **LED Warning Light / Negative busbar / Blade Fuse**



INDICATOR LIGHT	CUT-OUT
 With LED	
 W/O LED	

 (6.4mm)0.250" Quick connect

Input: 100 A max
Output: 30A max per circuit


FUSE

 BLADE FUSE

FEATURES:

- Material:
Base: PBT (UL flame: 94V-0).
Cap: PC (UL flame: 94V-2).
Terminal: tin plated brass.
- Input terminal rating: #10-32 threaded studs (100A. max.)
- Output terminal rating: 30A max per circuit.
- Connection pad option available.
- Input wire size: #4-6 AWG.
- Output wire size: #12-16 AWG.
- Torque rating: 20in-lb (2.25 Nm) max.
- Mounting torque rating: 8in-lb (0.9Nm) max.
- Red LED indicates when fuse is broken.
- Identify circuits by foot print marking.
- Negative bus provides common location for negative collection circuit.
- Clear insulating cover design for water splash and dust proof.
- Easy to open by pressing the latch.

R3-94-11-3104 **Mini Blade Fuse**



 WIRE

Input: 100 A max
Output: 20A max per circuit

FUSE

 MINI BLADE FUSE

FEATURES:

- Material:
Base: PBT (UL flame: 94V-0).
Cap: PC (UL flame: 94V-2).
Terminal: tin plated brass.
- Input terminal rating: #10-32 threaded studs (100A max.)
- Output terminal rating: 20A max per circuit.
- Clear insulating cover design for water splash and dust proof.
- Easy to open by pressing the latch.
- Output/Input wire size: #14 AWG.

CUT-OUT

