Tantalum Product - TAJ AUTOMOTIVE



PRODUCT SPECIFICATIONS:

Nominal Capacitance @ 120Hz 22 µF

Capacitance Tolerance (*) $K = \pm 10\%$; $M = \pm 20\%$

Rated Voltage DC (V_R) $\leq 85^{\circ}$ C 20 V

Category Voltage DC (V_C) ≤ 125°C 13 V

Surge Voltage (V_S) $\leq 85^{\circ}C$ 26 V

≤ 125°C 16 V

Temperature Range -55°C to +125°C

Direct Leakage Current max. @ V_R 4.4 µA

Dissipation Factor max. @ 120Hz 6 %

Typical weight (B case) 68 mg


Moisture sensitivity level: meets MSL 1

Moisture seriality level. Theels MOL

Reflow specification: meets J-STD-020 standard Meets requirements of AEC-Q200

Meets requirements of ALO Q2


100% surge current tested




AVX reserves the rights to supply higher voltage rating in the same case size, to the same reliability standards.


RMS value of Ripple Current (mA) @100kHz			RMS value of Ripple Voltage (mV) @100kHz			
25°C	85°C	125°C	25°C	85°C	125°C	
217	196	87	391	352	156	

HOW TO ORDER:

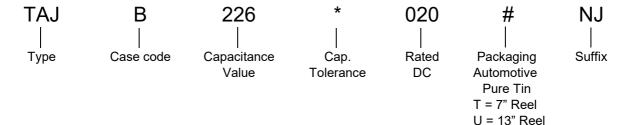

DRAWING AND DIMENSIONS:

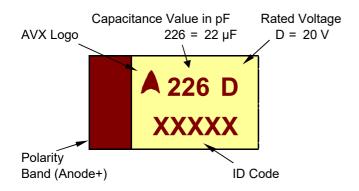

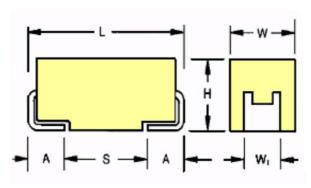







Tantalum Product - TAJ Series



CASE DIMENSIONS: millimetres

Cas	se						
EIA	AVX	L ±0.2	W +0.2 -0.1	H +0.2 –0.1	A +0.3 –0.2	S min.	W1 ±0.2
3528-21	В	3.5	2.8	1.9	0.8	1.4	2.2

PACKAGING INFORMATION:

Reel Size (#)	T = 7" Reel Automotive Pure Tin	U = 13" Reel Automotive Pure Tin	
Quantity	2000	8000	
Tape Width	8 mm	8 mm	

AMERICAS

AVX Greenville, SC Tel: 864-967-2150 **EUROPE**

AVX Limited, England Tel: +44-1252-770000

AVX S A S France Tel: +33-1-69-18-46-00

AVX GmbH, Germany Tel: +49-0811-95949-0

AVX SRL, Italy Tel: +39-02-614-571

AVX Czech Republic Tel: +420-57-57-521

AVX/ELCO UK Tel: +44-1638-675000

ELCO Europe GmbH Tel: +49-2741-299-0

AVX S.A., Spain

AVX Benelux Tel: +31-187-489-337 **ASIA-PACIFIC**

AVX/Kyocera (S) Pte Ltd, Singapore Tel:+65-6286-7555

AVX/Kyocera, Asia Ltd., Hong Kong Tel: +852-2363-3303

AVX/Kyocera Yuhan Hoesa, South Korea Tel: +82-2785-6504

> AVX/Kvocera HK Ltd., Taiwan Tel: +886-2-2656-0258

AVX/Kyocera (M) Sdn Bhd, Malaysia Tel: +60-4228-1190

AVX/Kyocera International Trading Co. Ltd., Shanghai Tel: +86-21-3255-1933

AVX/Kyocera Asia Ltd., Shenzen Tel: +86-755-3336-0615

Tel: +34-91-63-97-197 AVX/Kyocera International Trading Co. Ltd., Beijing Tel: +86-10-6588-3528

> AVX/Kyocera India Liaison Office Tel: +91-80-6450-0715

ASIA-KED

(KYOCERA Electronic Devices)

KED Hong Kong Ltd. Tel: +852-2305-1080/1223

KED Hong Kong Ltd., Shenzen Tel: +86-755-3398-9600

KED Company Ltd., Shanghai Tel: +86-21-3255-1833

KED Hong Kong Ltd., Beijing Tel: +86-10-5869-4655

> KED Taiwan Ltd. Tel: +886-2-2950-0268

KED Korea Yuhan Hoesa. South Korea Tel: +82-2-783-3604/6126

> KED (S) Pte Ltd., Singapore Tel: +65-6509-0328

Kyocera Corporation, Japan Tel: +81-75-604-3449

Issued by: AVX Technical Marketing Team Tantalum Division Technical assistance: Tech-info@avx.com

More details at: www.avx.com

Version: 11/2018

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. Specifications are typical and may not apply to all applications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our product are made without responsibility or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures are indicated or that measures may not be required. All samples are provided for testing purposes only. Provision of samples shall not constitute any offer of sale nor shall it constitute any commitment of any kind. Samples may not be incorporated in any product offered for commercial sale. Recipient assumes all risks and liability resulting from such testing. Samples are for the exclusive use of the direct recipient and shall not be sold, lent, given, or otherwise transferred to any other party. All unused samples shall be destroyed or returned to AVX.