Fair-Rite Products Corp.

Your Signal Solution®

# Multi- Aperture cores (2861001502)



Part Number: 2861001502

67 MULTI- APERTURE CORE

Explanation of Part Numbers: – Digits 1 & 2 = Product Class – Digits 3 & 4 = Material Grade

-Last digit 2 = Burnished

## Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi- aperture cores are supplied burnished.

Our "Multi- Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

#### Catalog Drawing 3D Model

#### Weight: 1.7 (g)

Dim	mm	mm tol	nominal inch	inch misc.		
А	13.3	±0.60	0.524		0	
В	6.6	±0.25	0.26			E 2//// A
С	7.5	±0.35	0.295			· ·
Е	5.7	±0.25	0.224			
Н	3.8	±0.25	0.15			- B -
		•		·	- C -	

Figure 1

<b>Chart Legend</b> + Test frequency			


Typical Impedance ( $\Omega$ )					
100 MHz 7					
250 MHz	103				
Electrical Properties					
A <sub>L</sub> (nH)	145 Min				

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

#### Catalog Drawing

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

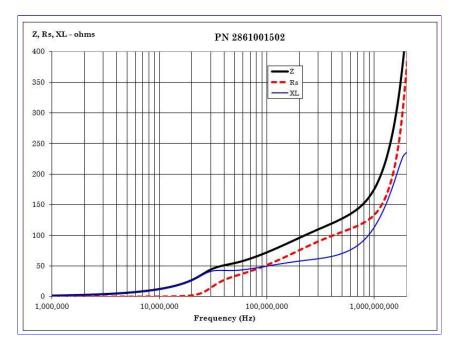

### CSV Download

Fair- Rite Products Corp.One Commercial Row, Wallkill, New York 12589-0288888-324-7748845-895-2055Fax: 845-895-2629[email protected]• www.fair- rite.com