

KRYTECH 531

DESCRIPTION AND GENERAL PROPERTIES

- **Material** Water-based polymer
- **Length (cm)** 23 - 27
- **Wrist** Knitted wrist
- **Colour/Color** Green
- **Interior finish** Seamless textile support from HDPE fibres
- **Exterior finish** Ventilated back
- **Size / EAN** 7 8 9 10 11
- **Packaging** 1 pair/bag - 12 pairs/bag - 48 pairs/carton
- **Complementary information** Silicone and DMF Free
OEKO-TEX®



PERFORMANCE RESULTS

Certification category 2




4542

Legends



MECHANICAL HAZARDS EN 388

PERFORMANCE LEVELS



LOW CHEMICAL PROTECTION EN 374



MICRO-ORGANISMS EN 374




RADIOACTIVE CONTAMINATION EN 421



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

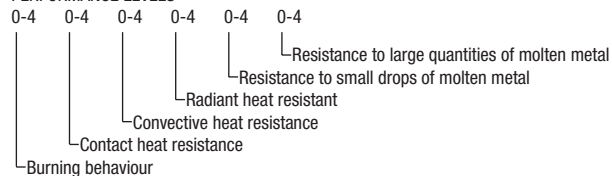


SPECIFIC CHEMICAL PROTECTION EN 374

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



COLD HAZARDS EN 511

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

KRYTECH 531

DESCRIPTION AND GENERAL PROPERTIES

- Breathable coating to have better comfort in use
- High cut protection for safety work
- Anatomical shape: close fit for precision
- Durable for a long-wear.

MAIN FIELDS OF USE

Automotive/mechanical industry

- Automotive assembly
- Bodywork assembly
- Finishing sharp parts
- Handling sheet metal
- Machine tool manufacture
- Mechanical maintenance
- Assembly of thin metal sheets

Mechanical industry

- Handling sharp sheet metal

Other industries

- Machine maintenance
- Handling of « aggressive » parts
- Household waste collection

Plastics industry

- Post-injection material removal

Local Authorities (Technical Maintenance)

- Maintenance work with risk of cuts

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
It is not recommended for persons sensitised to natural latex(wrist with elastic natural rubber)
It is not recommended to use this glove next to moving machinery.
- Put the gloves on dry, clean hands.
- Ensure the insides of the gloves are dry before putting them on again.

Storage conditions

Store the gloves in their original packaging protected from heat, light and humidity

Laundering conditions

Caution : using the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- CE-Type Examination Certificate

0075/014/162/04/16/0382

- Issued by the notified body nr

CTC - 4 rue Hermann Frenkel - 69367 Lyon cedex 07 - France

0075

MAPA[®]
PROFESSIONNEL

www.mapa-pro.com