


MINNIE-W

~35° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 32.4 mm
Height	14.8 mm
Fastening	glue
ROHS compliant	yes 🕕

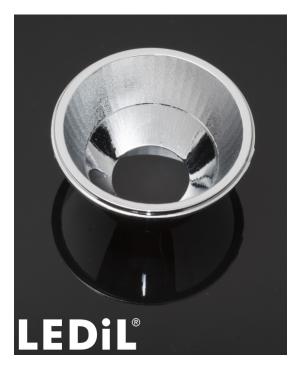

PRODUCT DATASHEET C11862_MINNIE-W


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish	Coating
MINNIE-W	Reflector	PC	metal		lacquer
ORDERING INFORMAT	ION:				

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C11862_MINNIE-W	1080	120	60	4.0
» Box size: 480 x 280 x 300 mm				



PRODUCT DATASHEET C11862_MINNIE-W

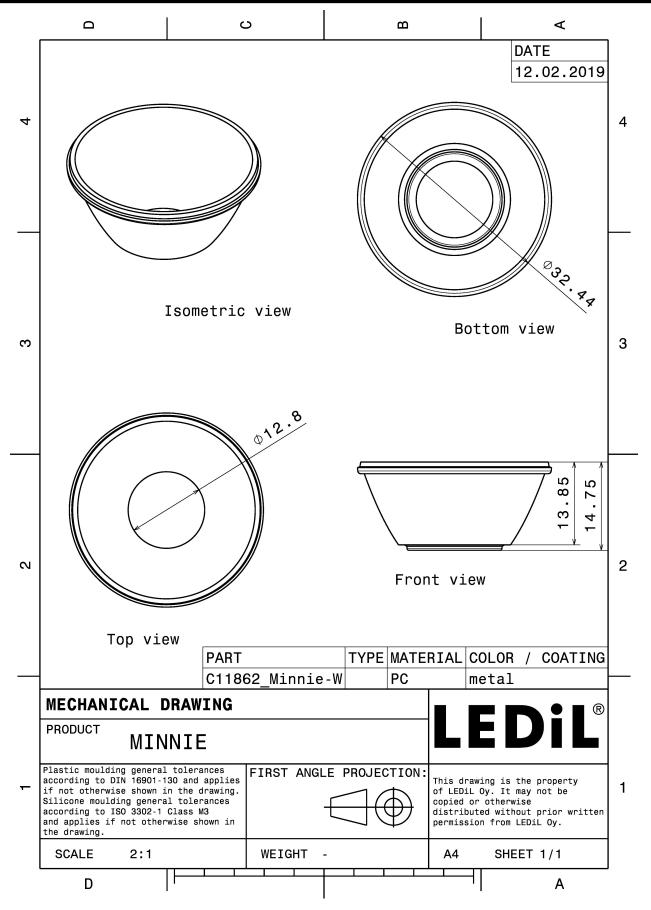

See also our general installation guide: <u>www.ledil.com/installation_guide</u>



PHOTOMETRIC DATA (MEASURED):

	MHD-E/G	90° 90°
EED FWHM / FWTM	22.0° / 81.0°	23*
Efficiency	82 %	
Peak intensity	2.1 cd/lm	60° 60°
LEDs/each optic	1	
Light colour	White	
Required compone		
		2679
		30*
	2	-w
LED	MT-G	
FWHM / FWTM	36.0° / 88.0°	
Efficiency	92 %	
LEDs/each optic	1	
Light colour	White	
Required compone		
	2	
LED	MT-G2	
FWHM / FWTM	36.0°	
Efficiency	92 %	
LEDs/each optic	1	
Light colour	White	
Required compone	nts:	
		90° 90'
LED	XHP70	75'
FWHM / FWTM	32.0° / 84.0°	
Efficiency	89 %	e0* × 90*
Peak intensity	1.8 cd/lm	
LEDs/each optic	1	a" a
Light colour	White	47° 45
Required compone	nts:	500
		364 335 04 355 36
-		



PHOTOMETRIC DATA (MEASURED):

	.EDS	90 ⁴
LED FWHM / FWTM Efficiency Peak intensity LEDs/each optic Light colour Required compone	LUXEON M/MX 29.0° / 83.0° 92 % 2.1 cd/lm 1 White	
UMIL		50 ⁴
LED FWHM / FWTM Efficiency	LUXEON MZ 25.0° / 78.0° 87 %	
Peak intensity LEDs/each optic Light colour	2.6 cd/lm 1 White	a ⁴ 100 a
Required compone	ents:	30 ⁶ 20 ⁹ 20 ⁹ 30
ØNICHI∕	k	99 ¹⁶ 99 ¹
LED FWHM / FWTM Efficiency	NSMx286M 36.0° / 82.0° 89 %	
Peak intensity LEDs/each optic	1.7 cd/lm 1	
Light colour Required compone	White ents:	



PHOTOMETRIC DATA (SIMULATED):

UMILEDS

LED	LUXEON 5258
FWHM / FWTM	28.0° / 60.0°
Efficiency	92 %
Peak intensity	2.8 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc. 228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd. # 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where_to_buy

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil: <u>C11862_MINNIE-W</u>